




04 A2 EAST ELEVATION
SCALE: 1/16" = 1'-0"

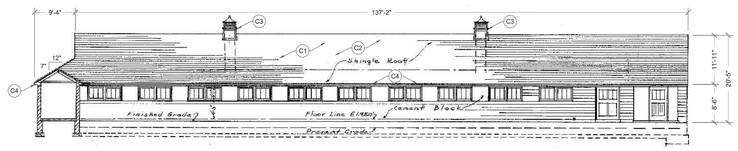

03 A2 EAST ELEVATION
SCALE: 1/16" = 1'-0"

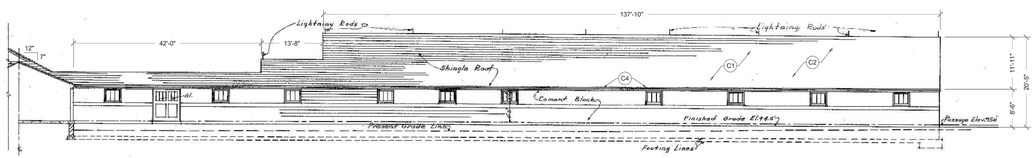

02 A2 NORTH ELEVATION
SCALE: 1/16" = 1'-0"

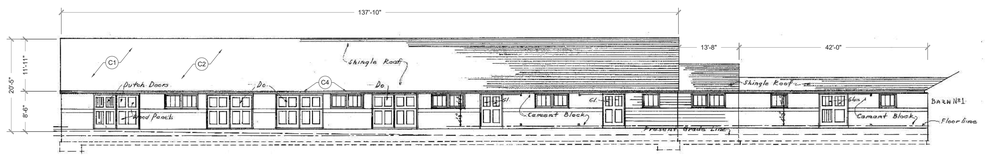

01 A2 SOUTH ELEVATION
SCALE: 1/16" = 1'-0"

GENERAL NOTES

1.) DIMENSIONS, MATERIALS, AND LOCATIONS ARE SHOWN AS ACCURATELY AS POSSIBLE. HOWEVER ALL SHOULD BE FIELD VERIFIED BY THE CONTRACTOR BEFORE ANY FORM OF CONSTRUCTION OR DEMOLITION BEGINS.

2.) DIMENSIONS SHOWN ON FLOOR PLANS, AND DETAILS ARE DRAWN TO FACE OF STRUCTURE UNLESS OTHERWISE SHOWN OR NOTED.

3.) ALL DIMENSIONS SHALL TAKE PRECEDENCE OVER SCALE. UNDER NO CIRCUMSTANCE SHALL THE CONTRACTOR SCALE THE DRAWINGS FOR DIMENSION.

4.) ALL DATA, EXISTING STRUCTURES, AND UTILITIES ABOVE OR BELOW GROUND WITHIN THE LIMITS OF THIS PROJECT SHALL BE CHECKED BY THE CONTRACTOR BEFORE ANY FORM OF CONSTRUCTION OR DEMOLITION BEGINS. IN CASES OF CONFLICT THE CONTRACT REPRESENTATIVE AND ARCHITECT SHALL BE NOTIFIED IMMEDIATELY, IN ORDER THAT CLARIFICATION OR CORRECTION MAY BE MADE.

5.) UNLESS OTHERWISE SHOWN OR NOTED, THE CONTRACTOR SHALL USE CONSTRUCTION DETAILS AND PRACTICES COMMON TO THE STANDARDS OF THE TRADE.

6.) THE CONTRACTOR SHALL PROVIDE ALL THE NECESSARY BLOCKING, BACKING, FRAMING, HANGERS, OR OTHER SUPPORT FOR ALL ITEMS REQUIRING THE SAME.

7.) ALL WORK SHALL CONFORM TO THE APPLICABLE CODES AND AUTHORITIES INCLUDING, BUT NOT LIMITED TO IBC, UBC, NFPA, ADA, AND OSHA AND SHALL BE OF THE BEST PRACTICE OF EACH TRADE.

8.) THE CONTRACTOR SHALL VERIFY AND MAINTAIN ALL THE REQUIRED CLEARANCES AROUND INSTALLED EQUIPMENT.

9.) THE CONTRACTOR SHALL VERIFY ALL ROOF PENETRATION LOCATIONS, AMOUNTS, AND TYPES BEFORE ANY FORM OF CONSTRUCTION OR DEMOLITION BEGINS.

CONSTRUCTION NOTES

C1 EXISTING 7:12 SLOPED COMPOSITE SHINGLE ROOF TO BE DEMOLISHED TO DECK, TYP.

C2 NEW STANDING SEAM METAL ROOF ASSEMBLY. NEW ROOFING SYSTEM TO INCLUDE NEW UNDERLAY, WATER & ICE SHIELD, DRIP EDGE, FLASHING, COUNTER FLASHING, AND SNOW CLEATS WHERE APPLICABLE, TYP.

C3 EXISTING ROOF PENETRATION TO REMAIN. PENETRATION TO RECEIVE FLASHING AND SEALANT WHERE APPLICABLE, TYP.

C4 NEW METAL GUTTERING AND DOWNSPOUTS TO BE INSTALLED, TYP.

United States Department of Justice
Federal Bureau of Prisons
FCC Terre Haute
4200 Bureau Road Terre Haute, Indiana 47802

PROJECT NAME
REPLACE ROOF FPC

M.W.O NUMBER
68651

DRAWN BY
NIC LAMPHEAR

REVISIONS

PROJECT REVIEW SET	9.24.24
TECHNICAL APPROVAL SET	9.25.24

PROJECT NUMBER
24Z4AT8

DRAWING TITLE
ELEVATIONS + SECTIONS

SHEET NUMBER
A2 of 02