
5/19/25 13:41 RKALLEN C:\USERS\RKALLEN\BOX\ENGDESIGN\CARIBOUTARGHEE\MESA.FALLS.BOARDWALK - VISITOR CENTER -2024\DWG\MESAFALLS.- PLANS - ELEVS - FINAL - 04.07.2

United States Department of Agriculture
Forest Service


R4 INTERMOUNTAIN REGION
CARIBOU-TARGHEE NATIONAL FOREST

FREMONT COUNTY
IDAHO

GAOA MESA FALLS VISITOR CENTER ROOF REPLACEMENT AND MAINTENANCE

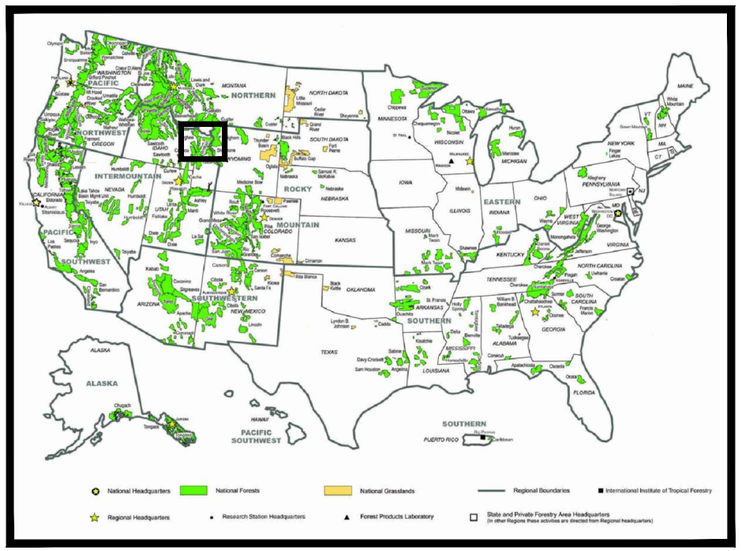

PROJECT LOCATION
NATIONAL MAP

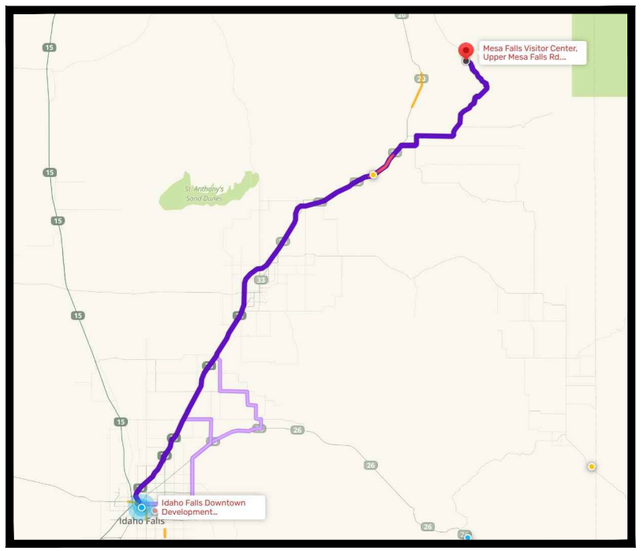

VICINITY MAP

TRAVEL DIRECTIONS:

Mesa Falls Visitor Center, Upper Mesa Falls Rd, Ashton, Idaho 83420

START FROM IDAHO FALLS, ID DOWNTOWN. TAKE US-20 E FOR 51.7 MILES. TURN RIGHT ON ID-47 N, TURN LEFT ONTO TO FOREST RD 20295 / UPPER MESA FALLS RD IN FREMONT COUNTY

INDEX OF SHEETS		
SHEET	**SHEET TITLE**	**NO.**
G-01	COVER SHEET AND LOCATION	1
A1.01	ROOF PLAN	2
A1.02	ROOF OVERHANG FRAMING PLAN	3
A2.01	NORTH ELEVATION	4
A2.02	EAST ELEVATION	5
A2.03	SOUTH ELEVATION	6
A2.04	WEST ELEVATION	7
A4.01	ROOF DETAILS	8
A4.02	ROOF DETAILS	9

RECOMMENDED BY:


STEVEN JENKINS — Digitally signed by STEVEN JENKINS Date: 2025.05.23 09:33:54 -06'00'

FOREST ENGINEER — DATE

APPROVED:

KEVIN BOURNE — Digitally signed by KEVIN BOURNE Date: 2025.05.23 15:01:20 -06'00'

DIRECTOR OF ENGINEERING — DATE

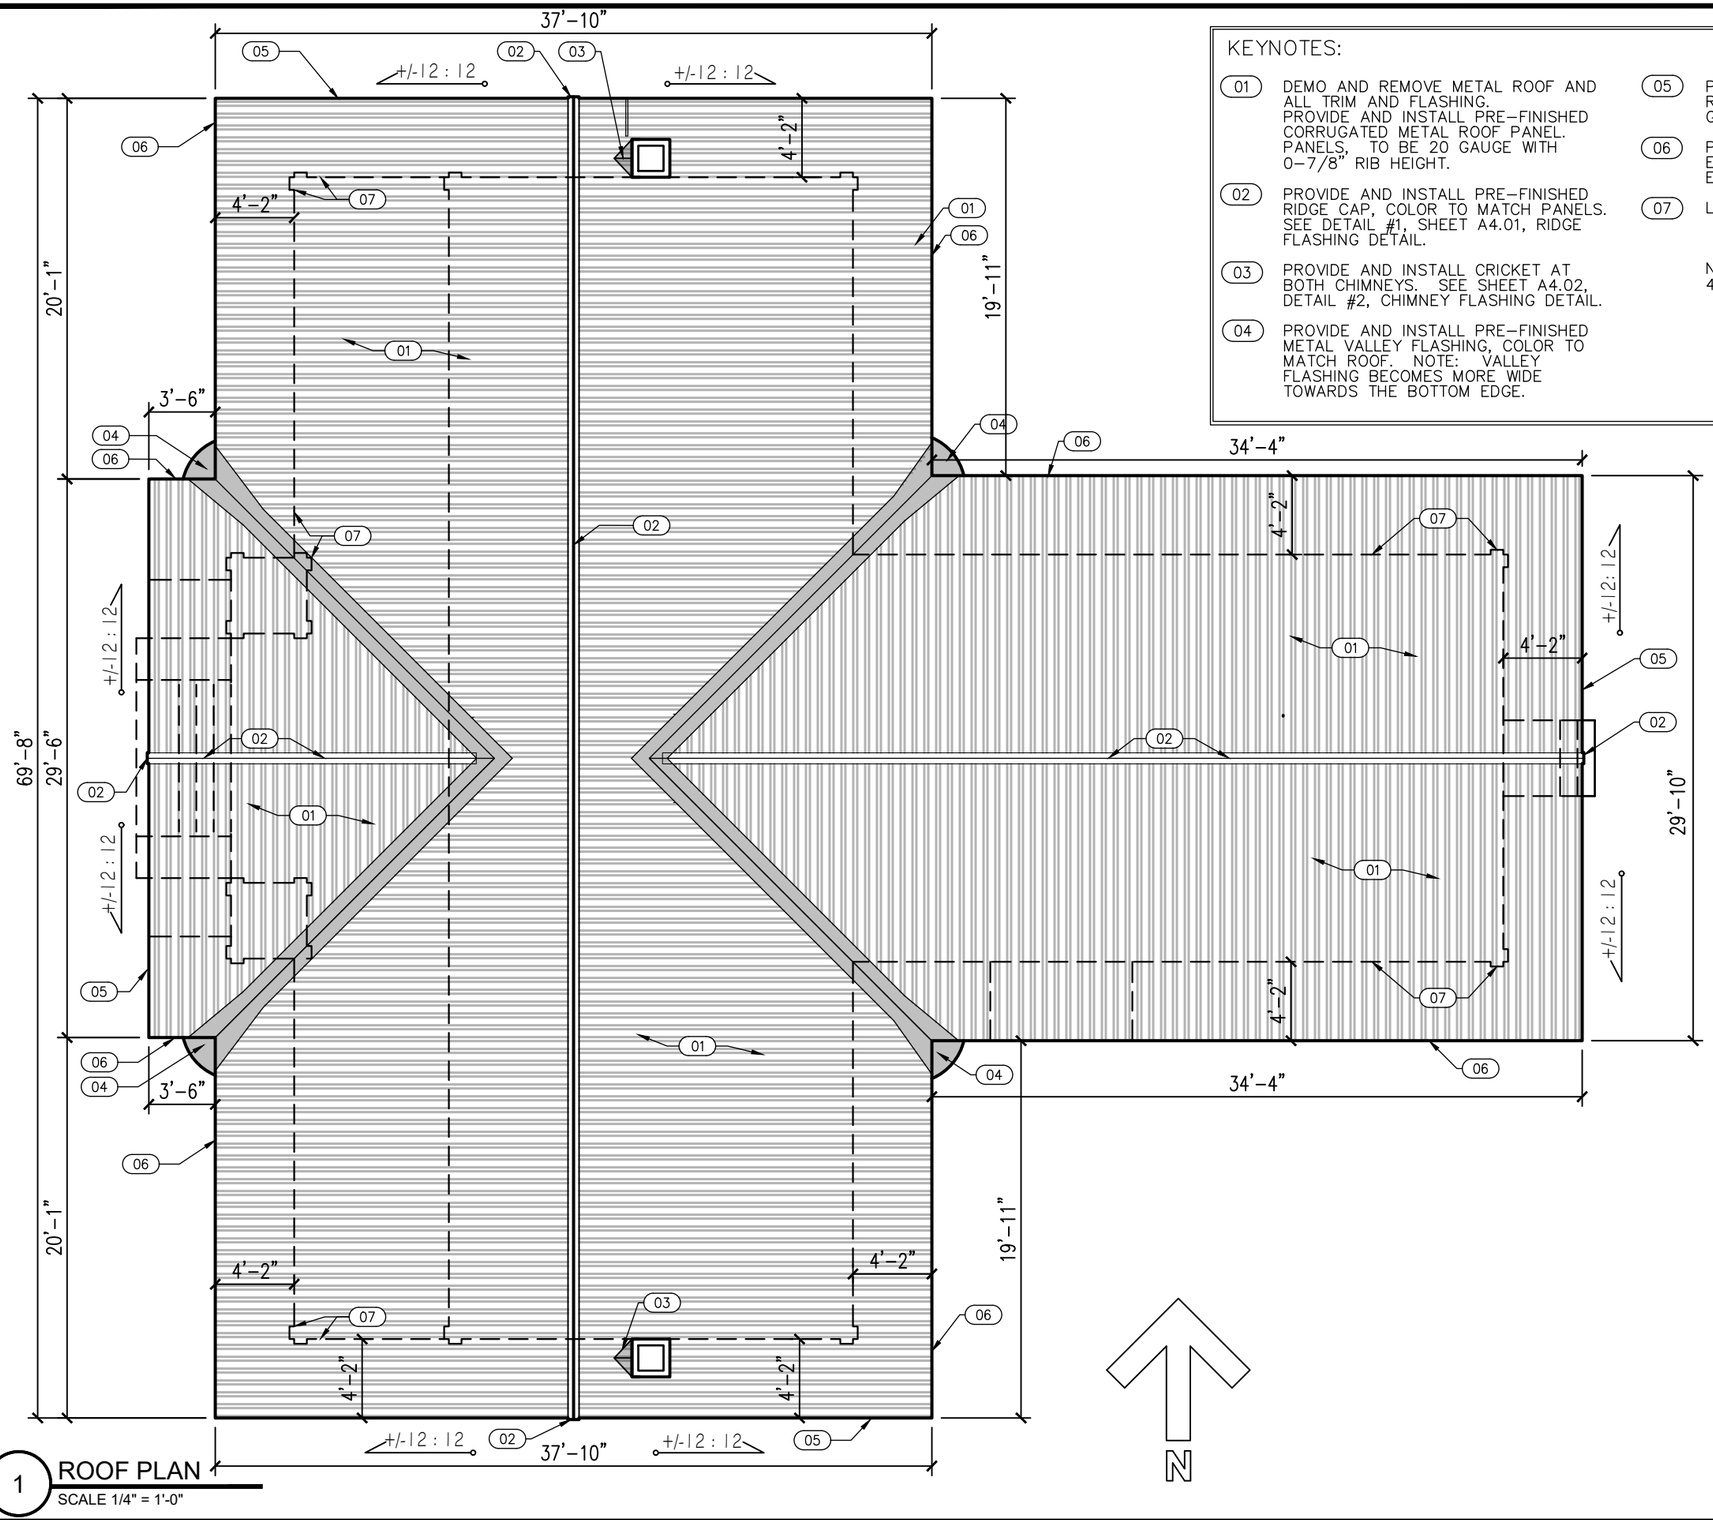

1 ROOF PLAN
SCALE 1/4" = 1'-0"

KEYNOTES:

01 DEMO AND REMOVE METAL ROOF AND ALL TRIM AND FLASHING. PROVIDE AND INSTALL PRE-FINISHED CORRUGATED METAL ROOF PANEL. PANELS, TO BE 20 GAUGE WITH 0-7/8" RIB HEIGHT.

02 PROVIDE AND INSTALL PRE-FINISHED RIDGE CAP, COLOR TO MATCH PANELS. SEE DETAIL #1, SHEET A4.01, RIDGE FLASHING DETAIL.

03 PROVIDE AND INSTALL CRICKET AT BOTH CHIMNEYS. SEE SHEET A4.02, DETAIL #2, CHIMNEY FLASHING DETAIL.

04 PROVIDE AND INSTALL PRE-FINISHED METAL VALLEY FLASHING, COLOR TO MATCH ROOF. NOTE: VALLEY FLASHING BECOMES MORE WIDE TOWARDS THE BOTTOM EDGE.

05 PROVIDE AND INSTALL FLASHING AT RAKE. SEE SHEET A4.01, DETAIL #2, GABLE FLASHING DETAIL.

06 PROVIDE AND INSTALL FLASHING AT EAVE. SEE SHEET A4.01, DETAIL #3, EAVE FLASHING DETAIL.

07 LINE OF WALL BELOW.

NOTE: TOTAL ROOF AREA = 4,490SF +/-

United States Department of Agriculture
Forest Service

R4
INTERMOUNTAIN REGION

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1		

PROJECT NAME

GAOA MESA FALLS VISITOR CENTER ROOF REPLACEMENT AND MAINT.

CARIBOU-TARGHEE NATIONAL FOREST


ASHTON / ISLAND PARK RANGER DISTRICT

DRAWING TITLE

ROOF PLAN

DATE 04/04/2025	ARCHIVE NO.
DESIGNER RKRA	DRAWING SHEET NO. A1.01
DRAWN RKRA	
CHECKED R.ANDERSON	
PROJECT NO.	SHEET 02 OF 09

5/16/25 14:00 RKALLEN C:\USERS\RKALLEN\BOX\ENGDESIGN\CARIBOUTARGHEE\MESA FALLS\BOARDWALK - VISITOR CENTER -2024\DWG\MESAFALLS - PLANS - ELEVS - FINAL - 04.07.2025.DWG;

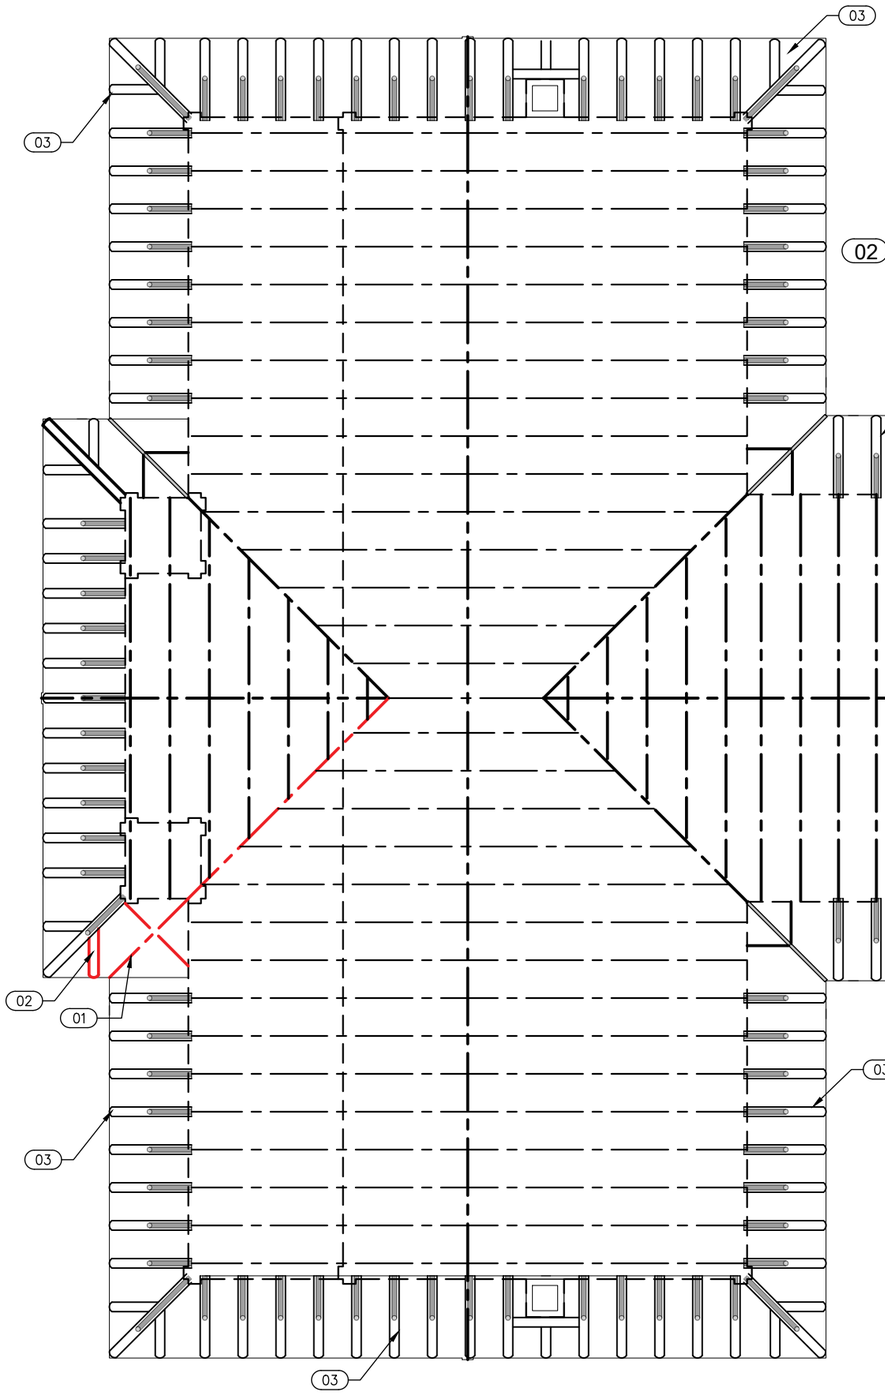





VIEWS OF OVERHANG FRAMING DAMAGE

KEYNOTES:


01 REPAIR FRAMING AND DECKING CONNECTIONS AT CORNER OVERHANG AS NEEDED TO ELIMINATE GAPS. CONSULT COR.

02 REPLACE ROUND FRAMING. PAINT TO MATCH EXISTING AS CLOSELY AS POSSIBLE.

03 OPTION #1:
REPAIR ROOF OVERHANG FRAMING AND PLANK DECKING AS NEEDED. INSPECT ALL ROOF OVERHANG FRAMING AND DECKING AND REPORT FINDINGS TO COR BEFORE PROCEEDING ON REPAIRS.

N

1 ROOF OVERHANG FRAMING PLAN
SCALE 1/4" = 1'-0"

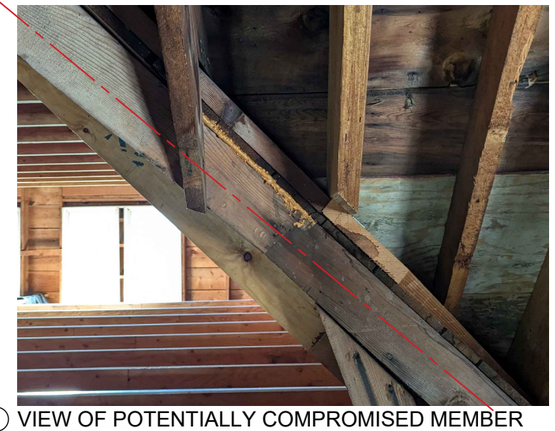

04 VIEW OF POTENTIALLY COMPROMISED MEMBER

United States Department of Agriculture
Forest Service

R4
INTERMOUNTAIN REGION

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1		

PROJECT NAME

GAOA MESA FALLS VISITOR CENTER ROOF REPLACEMENT AND MAINT.

CARIBOU-TARGHEE NATIONAL FOREST

ASHTON / ISLAND PARK RANGER DISTRICT

DRAWING TITLE

ROOF OVERHANG FRAMING PLAN

DATE 04/04/2025	ARCHIVE NO. FS090523_R102013_L1-002.dwg
DESIGNER RKRA	DRAWING SHEET NO. A1.02
DRAWN RKRA	
CHECKED R.ANDERSON	
PROJECT NO.	SHEET 03 OF 09

5/16/25 14:00 RKALLEN C:\USERS\RKALLEN\BOX\ENG\DESIGN\CARIBOUTARGHEE\MESA FALLS BOARDWALK - VISITOR CENTER - 2024\DWG\MESA FALLS - PLANS - ELEVS - FINAL - 04.07.2025.DWG;

KEYNOTES:

01 DEMO AND REMOVE METAL ROOF AND ALL TRIM AND FLASHING. PROVIDE AND INSTALL PRE-FINISHED CORRUGATED METAL ROOF PANEL. PANELS, TO BE 20 GAUGE WITH 0-7/8" RIB HEIGHT.

02 PROVIDE AND INSTALL PRE-FINISHED RIDGE CAP, COLOR TO MATCH PANELS. SEE DETAIL #1, SHEET A4.01, RIDGE FLASHING DETAIL.

03 PROVIDE AND INSTALL CRICKET AT BOTH CHIMNEYS. SEE SHEET A4.02, DETAIL #2, CHIMNEY FLASHING DETAIL.

04 PROVIDE AND INSTALL PRE-FINISHED METAL VALLEY FLASHING.


05 PROVIDE AND INSTALL PRE-FINISHED METAL DRIP EDGE FLASHING, COLOR TO MATCH ROOF. SEE DETAILS.

06 NOT USED.

07 PREP AND STAIN ALL LOG WALLS, WOOD SHINGLE WALLS, AND ROUND FRAMING. INSPECT LOG SURFACES FOR HOLES, CRACKS, OR IMPERFECTIONS, AND FILL THEM WITH WOOD FILLER. NEW STAIN COLOR TO MATCH EXISTING AS CLOSELY AS POSSIBLE.

08 PREP AND PREP AND PAINT ALL DOORS AND FRAMES, WINDOWS AND FRAMES, COLUMNS, HANDRAILS, AND ALL TRIM.

NOTE:
557sf +/- WOOD SIDING TOTAL
2,350sf +/- LOG WALL TOTAL

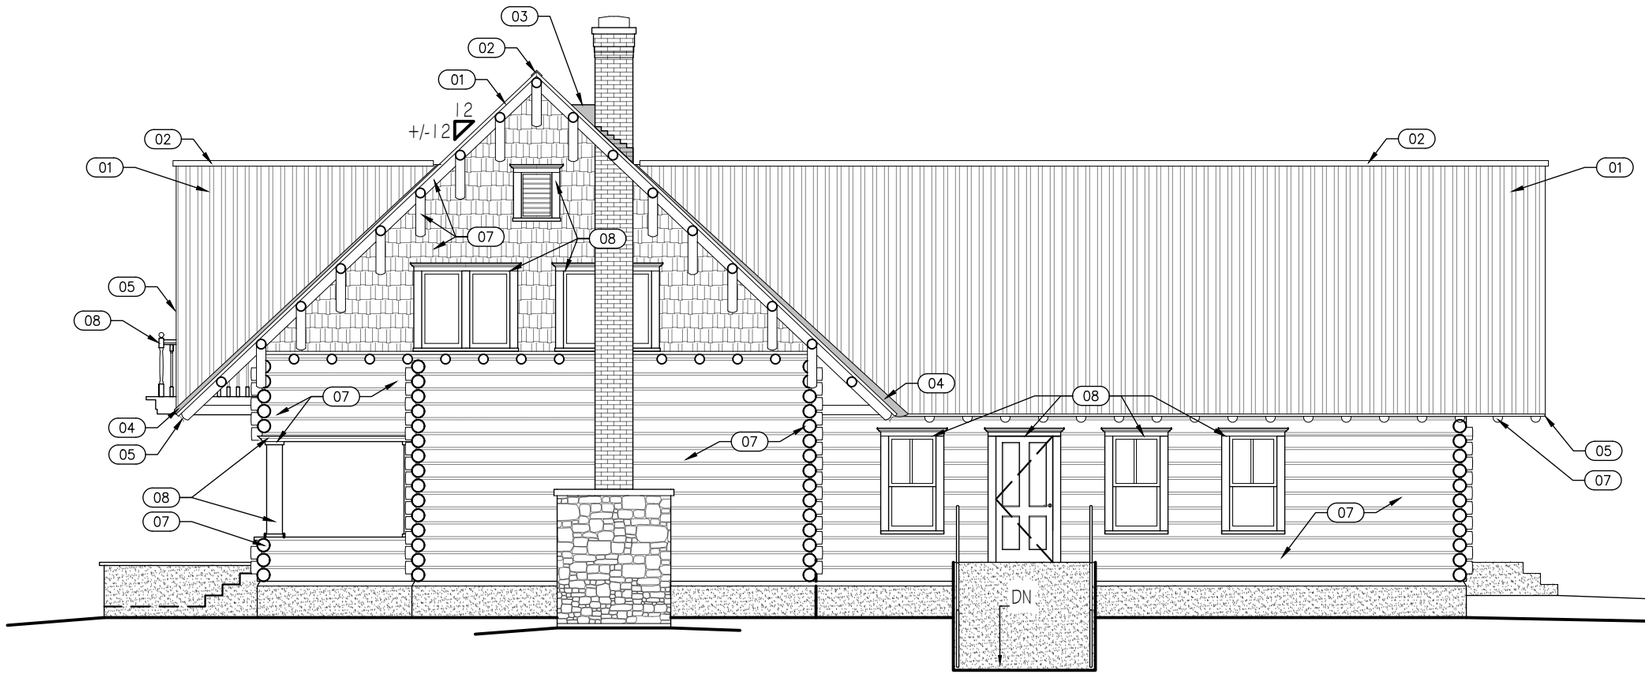

1 NORTH ELEVATION
SCALE: 1/8" = 1'-0"

USDA FOREST SERVICE
United States Department of Agriculture
Forest Service

R4
INTERMOUNTAIN REGION

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1		

PROJECT NAME

GAOA MESA FALLS VISITOR CENTER ROOF REPLACEMENT AND MAINT.

CARIBOU-TARGHEE NATIONAL FOREST

ASHTON / ISLAND PARK RANGER DISTRICT

DRAWING TITLE

NORTH ELEVATION

DATE 04/04/2025	ARCHIVE NO. FS090523_R102013_L1-002.dwg
DESIGNER RKRA	DRAWING SHEET NO. A2.01
DRAWN RKRA	
CHECKED R.ANDERSON	
PROJECT NO.	SHEET 04 OF 09

5/16/25 14:00 RKALLEN C:\USERS\RKALLEN\BOX\ENGDESIGN\CARIBOUTARGHEE\MESA FALLS BOARDWALK - VISITOR CENTER - 2024\DWG\MESA FALLS - PLANS - ELEVS - FINAL - 04.07.2025.DWG;

KEYNOTES:

01 DEMO AND REMOVE METAL ROOF AND ALL TRIM AND FLASHING. PROVIDE AND INSTALL PRE-FINISHED CORRUGATED METAL ROOF PANEL. PANELS, TO BE 20 GAUGE WITH 0-7/8" RIB HEIGHT.

02 PROVIDE AND INSTALL PRE-FINISHED RIDGE CAP, COLOR TO MATCH PANELS. SEE DETAIL #1, SHEET A4.01, RIDGE FLASHING DETAIL.

03 PROVIDE AND INSTALL CRICKET AT BOTH CHIMNEYS. SEE SHEET A4.02, DETAIL #2, CHIMNEY FLASHING DETAIL.

04 PROVIDE AND INSTALL PRE-FINISHED METAL VALLEY FLASHING.

05 PROVIDE AND INSTALL PRE-FINISHED METAL DRIP EDGE FLASHING, COLOR TO MATCH ROOF. SEE DETAILS.

06 INSPECT ATTIC VENT TO ENSURE PEST CONTROL SCREEN IS INSTALLED AT INTERIOR SIDE. INSTALL SCREEN IF NONE IS PRESENT.

07 PREP AND STAIN ALL LOG WALLS, WOOD SHINGLE WALLS, AND ROUND FRAMING. INSPECT LOG SURFACES FOR HOLES, CRACKS, OR IMPERFECTIONS, AND FILL THEM WITH WOOD FILLER. NEW STAIN COLOR TO MATCH EXISTING AS CLOSELY AS POSSIBLE.

08 PREP AND PAINT ALL DOORS AND FRAMES, WINDOWS AND FRAMES, AND ALL TRIM.

1 EAST ELEVATION
SCALE: 1/8" = 1'-0"

5/16/25 14:00 RKALLEN C:\USERS\RKALLENBOX\ENGDESIGN\CARIBOUTARGHEE\MESAFALLS.BOARDWALK - VISITOR CENTER -2024\DWG\MESAFALLS - PLANS - ELEVS - FINAL - 04.07.2025.DWG;

United States Department of Agriculture
Forest Service

R4
INTERMOUNTAIN REGION

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1		

PROJECT NAME

GAOA MESA FALLS VISITOR CENTER ROOF REPLACEMENT AND MAINT.

CARIBOU-TARGHEE NATIONAL FOREST

ASHTON / ISLAND PARK RANGER DISTRICT

DRAWING TITLE

EAST ELEVATION

DATE 04/04/2025	ARCHIVE NO. FS090523_R102013_L1-002.dwg
DESIGNER RKRA	DRAWING SHEET NO. A2.02
DRAWN RKRA	
CHECKED R.ANDERSON	
PROJECT NO.	SHEET 05 OF 09

KEYNOTES:

01 DEMO AND REMOVE METAL ROOF AND ALL TRIM AND FLASHING. PROVIDE AND INSTALL PRE-FINISHED CORRUGATED METAL ROOF PANEL. PANELS, TO BE 20 GAUGE WITH 0-7/8" RIB HEIGHT.

02 PROVIDE AND INSTALL PRE-FINISHED RIDGE CAP, COLOR TO MATCH PANELS. SEE DETAIL #1, SHEET A4.01, RIDGE FLASHING DETAIL.

03 PROVIDE AND INSTALL CRICKET AT BOTH CHIMNEYS. SEE SHEET A4.02, DETAIL #2, CHIMNEY FLASHING DETAIL.

04 PROVIDE AND INSTALL PRE-FINISHED METAL VALLEY FLASHING.

05 PROVIDE AND INSTALL PRE-FINISHED METAL DRIP EDGE FLASHING, COLOR TO MATCH ROOF. SEE DETAILS.

06 WOODPECKER DAMAGE: SEAL WALL SHEATHING WHERE DAMAGED. REPLACE LEFT SIDE VENT TRIM. REPLACE OR PATCH AND FILL VENT CROWN MOLDING AND CEDAR GINGERBREAD SIDING. PAINT TO MATCH EXISTING AS CLOSELY AS POSSIBLE.


07 NOT USED.

08 INSPECT ATTIC VENT TO ENSURE PEST CONTROL SCREEN IS INSTALLED AT INTERIOR SIDE. INSTALL SCREEN IF NONE IS PRESENT.


09 PREP AND STAIN ALL LOG WALLS, WOOD SHINGLE WALLS, AND ROUND FRAMING. INSPECT LOG SURFACES FOR HOLES, CRACKS, OR IMPERFECTIONS, AND FILL THEM WITH WOOD FILLER. NEW STAIN COLOR TO MATCH EXISTING AS CLOSELY AS POSSIBLE.

10 PREP AND PAINT ALL DOORS AND FRAMES, WINDOWS AND FRAMES, COLUMNS, HANDRAILS, AND ALL TRIM.



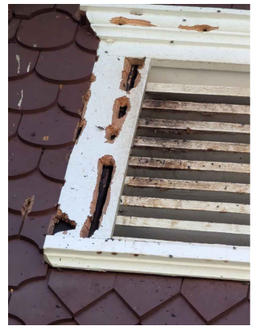

08 VIEW OF WOODPECKER DAMAGE

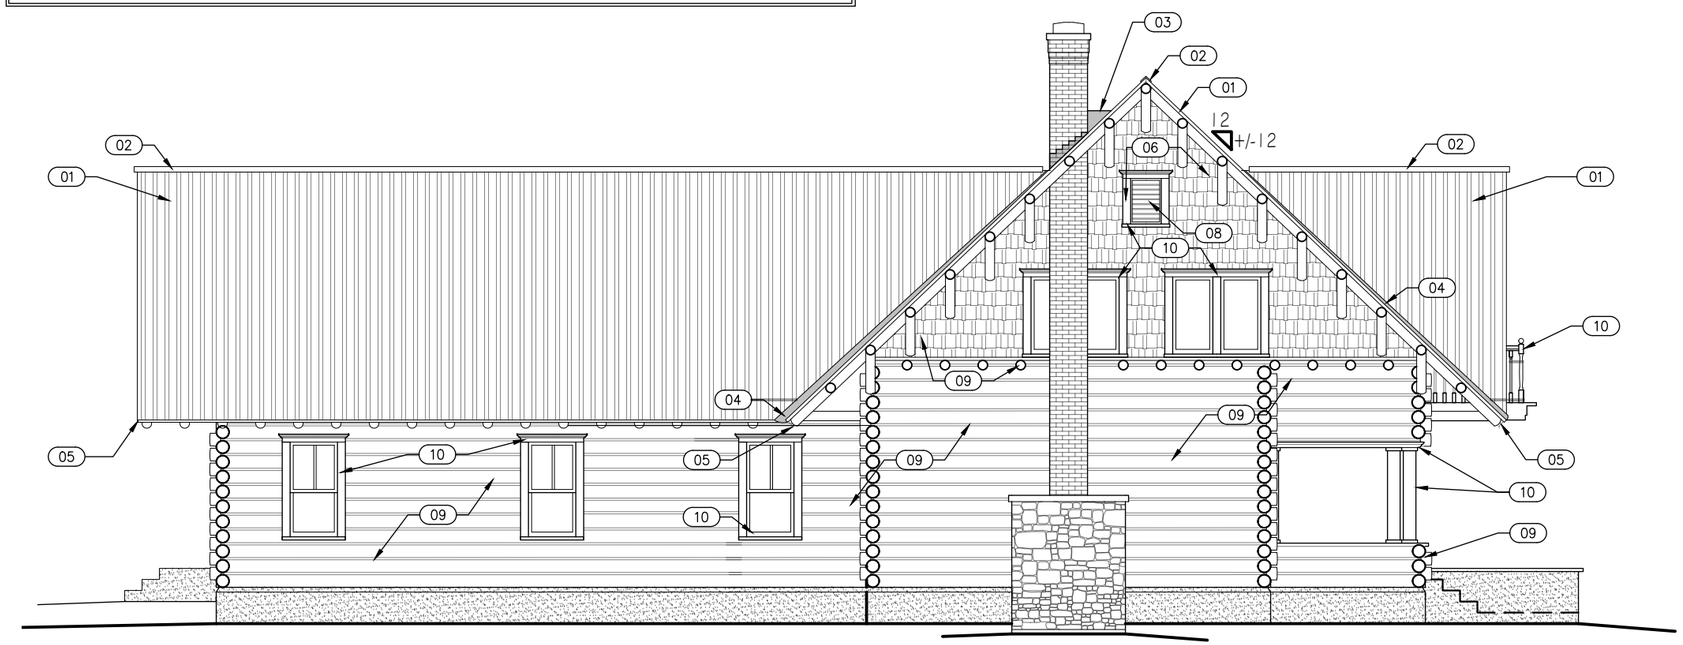

1 SOUTH ELEVATION
SCALE: 1/8" = 1'-0"

United States Department of Agriculture
Forest Service

R4
INTERMOUNTAIN REGION

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1		

PROJECT NAME

GAOA MESA FALLS VISITOR CENTER ROOF REPLACEMENT AND MAINT.

CARIBOU-TARGHEE NATIONAL FOREST

ASHTON / ISLAND PARK RANGER DISTRICT

DRAWING TITLE

SOUTH ELEVATION

DATE: 04/04/2025	ARCHIVE NO.: FS090523_R102013_L1-002.dwg
DESIGNER: RKRA	DRAWING SHEET NO.: A2.03
DRAWN: RKRA	
CHECKED: R.ANDERSON	
PROJECT NO.	SHEET 06 OF 09

5/16/25 14:00 RKALLEN C:\USERS\RKALLEN\BOX\ENGDESIGN\CARIBOUTARGHEE\MESA FALLS BOARDWALK - VISITOR CENTER - 2024\DWG\MESA FALLS - PLANS - ELEVS - FINAL - 14.07.2025.DWG;

KEYNOTES:

01 DEMO AND REMOVE METAL ROOF AND ALL TRIM AND FLASHING. PROVIDE AND INSTALL PRE-FINISHED CORRUGATED METAL ROOF PANEL. PANELS, TO BE 20 GAUGE WITH 0-7/8" RIB HEIGHT.

02 PROVIDE AND INSTALL PRE-FINISHED RIDGE CAP, COLOR TO MATCH PANELS. SEE DETAIL #1, SHEET A4.01, RIDGE FLASHING DETAIL.

03 PROVIDE AND INSTALL CRICKET AT BOTH CHIMNEYS. SEE SHEET A4.02, DETAIL #2, CHIMNEY FLASHING DETAIL.

04 PROVIDE AND INSTALL PRE-FINISHED METAL VALLEY FLASHING.

05 PROVIDE AND INSTALL PRE-FINISHED METAL DRIP EDGE FLASHING, COLOR TO MATCH ROOF. SEE DETAILS.

06 SEAL WALL PENETRATION.


07 FUTURE PROJECT / NOT IN CONTRACT ADDRESS SAGGING FRAMING AT BALCONY AND CORNER OVERHANG.

08 PREP AND STAIN ALL LOG WALLS, WOOD SHINGLE WALLS, AND ROUND FRAMING. INSPECT LOG SURFACES FOR HOLES, CRACKS, OR IMPERFECTIONS, AND FILL THEM WITH WOOD FILLER. NEW STAIN COLOR TO MATCH EXISTING AS CLOSELY AS POSSIBLE.

09 PREP AND PAINT ALL DOORS AND FRAMES, WINDOWS AND FRAMES, COLUMNS, HANDRAILS, AND ALL TRIM.



08 VIEW OF WALL PENETRATIONS

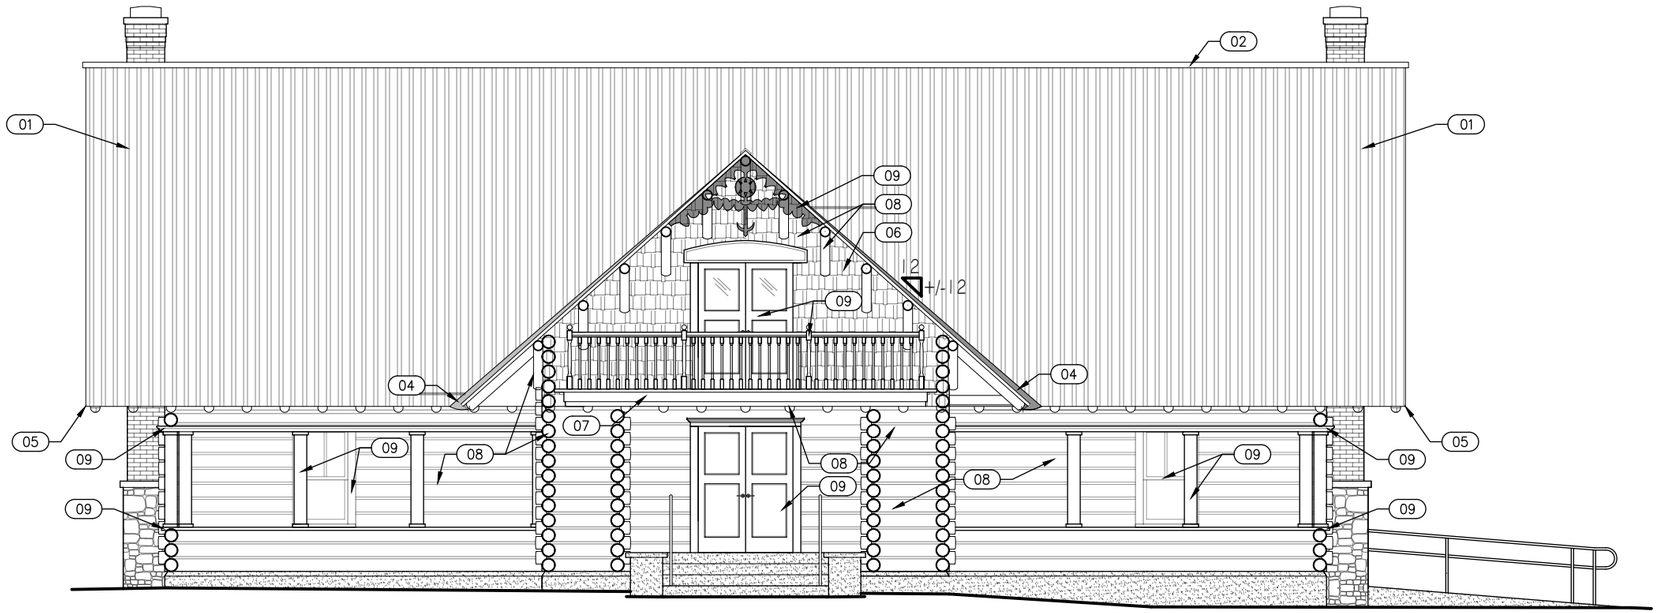

1 WEST ELEVATION
SCALE: 1/8" = 1'-0"

United States Department of Agriculture
Forest Service

R4
INTERMOUNTAIN REGION

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1		

PROJECT NAME

GAOA MESA FALLS VISITOR CENTER ROOF REPLACEMENT AND MAINT.

CARIBOU-TARGHEE NATIONAL FOREST


ASHTON / ISLAND PARK RANGER DISTRICT

DRAWING TITLE


WEST ELEVATION

DATE 04/04/2025	ARCHIVE NO. FS090523_R102013_L1-002.dwg
DESIGNER RKRA	DRAWING SHEET NO. A2.04
DRAWN RKRA	
CHECKED R.ANDERSON	
PROJECT NO.	SHEET 07 OF 09


5/16/25 14:00 RKALLEN C:\USERS\RKALLENBOX\ENGDESIGN\CARIBOUTARGHEE\MESAFALLS.BOARDWALK - VSITOR CENTER -2024\DWG\MESAFALLS - PLANS - ELEVS - FINAL - 04.07.2025.DWG;

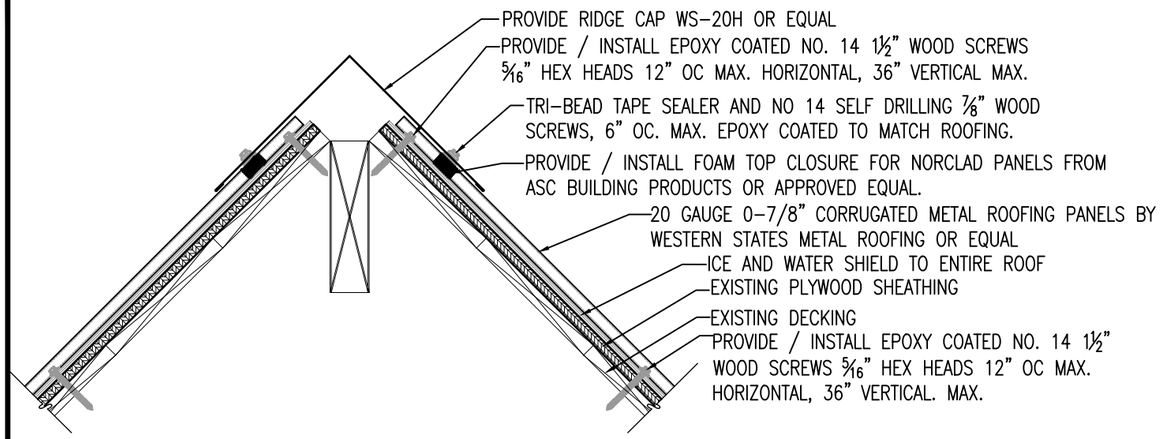

1 RIDGE FLASHING DETAIL
SCALE 1-1/2" = 1'-0"

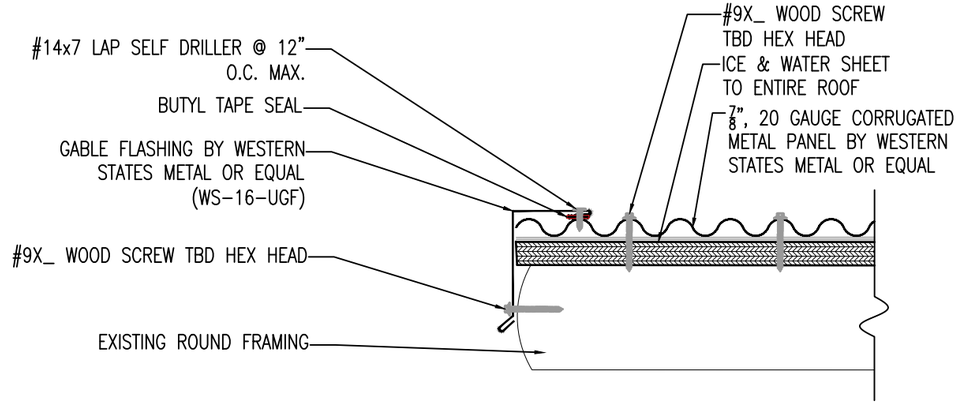

2 GABLE FLASHING DETAIL
SCALE 1-1/2" = 1'-0"

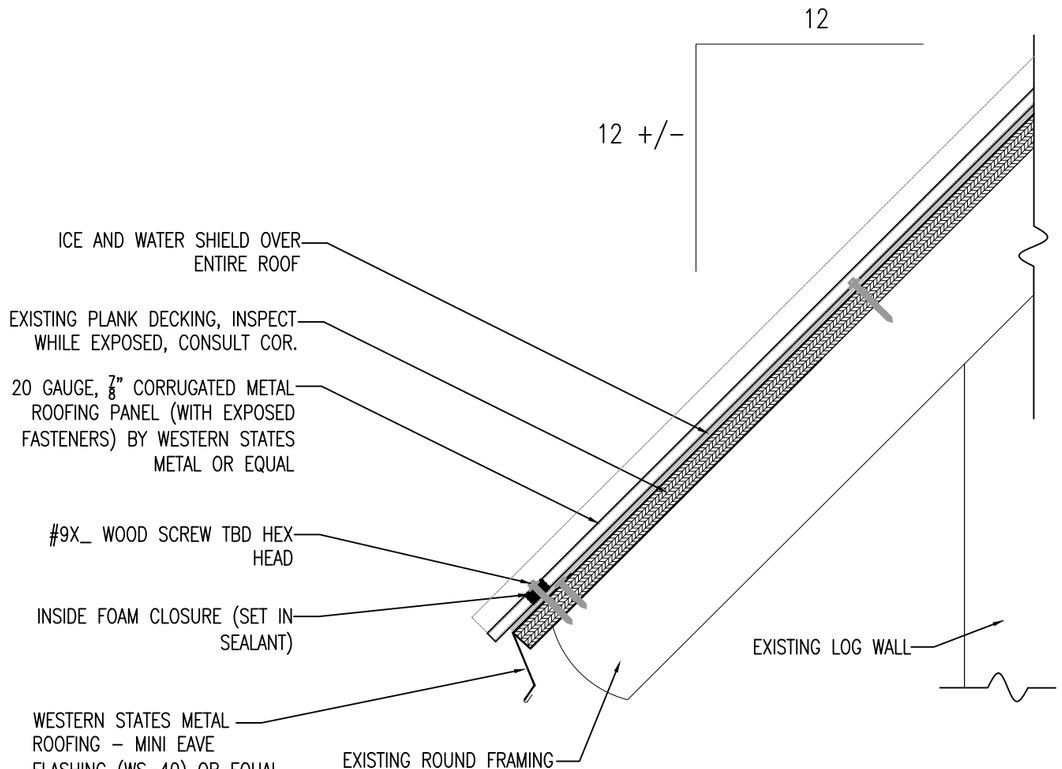

3 EAVE FLASHING DETAIL
SCALE 1-1/2" = 1'-0"

USDA FOREST SERVICE
United States Department of Agriculture
Forest Service
R4
INTERMOUNTAIN REGION

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1		

PROJECT NAME

GAOA MESA FALLS VISITOR CENTER ROOF REPLACEMENT AND MAINT.

CARIBOU-TARGHEE NATIONAL FOREST


ASHTON / ISLAND PARK RANGER DISTRICT

DRAWING TITLE


ROOF DETAILS

DATE 04/04/2025	ARCHIVE NO. FS090523_R102013_L1-002.dwg
DESIGNER RKRA	DRAWING SHEET NO. A4.01
DRAWN RKRA	
CHECKED R.ANDERSON	
PROJECT NO.	SHEET 08 OF 09


5/16/25 14:00 RKALLEN C:\USERS\RKALLEN\BOX\ENGDESIGN\CARIBOUTARGHEE\MESAFALLS\BOARDWALK - VISITOR CENTER -2024\DWG\MESAFALLS - PLANS - ELEVS - FINAL - 04.07.2025.DWG;

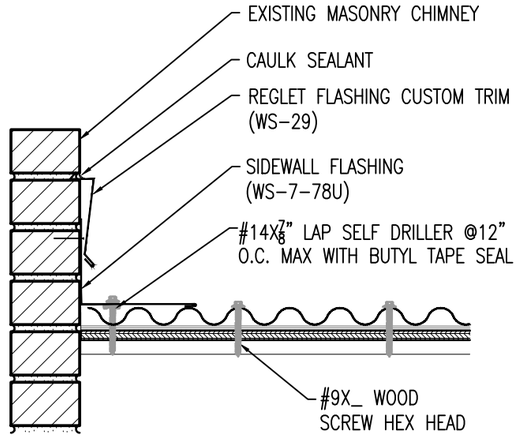


1 CHIMNEY FLASHING DETAIL
SCALE 1-1/2" = 1'-0"

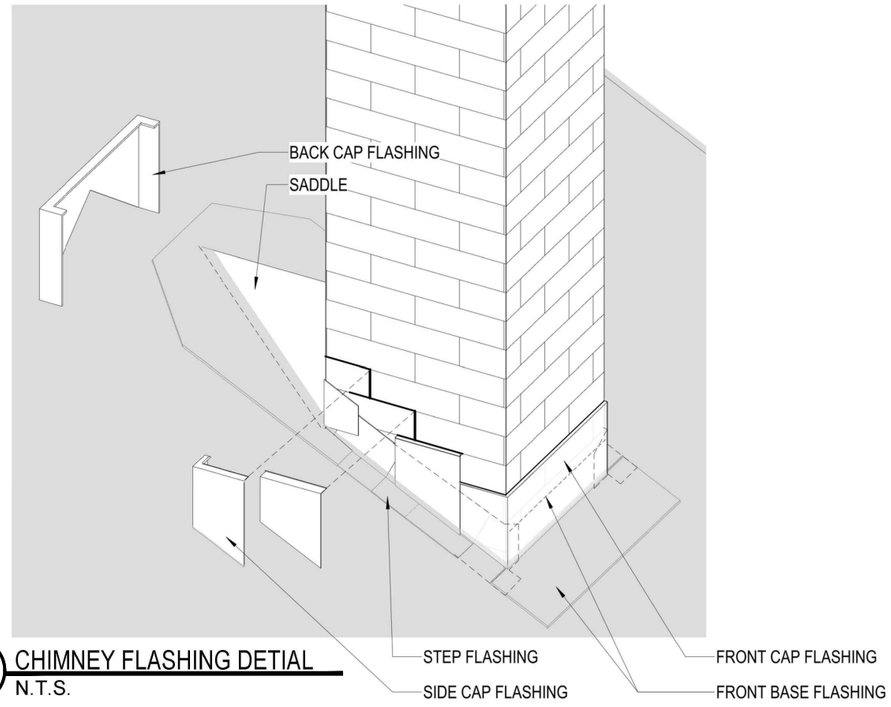

2 CHIMNEY FLASHING DETIAL
N.T.S.

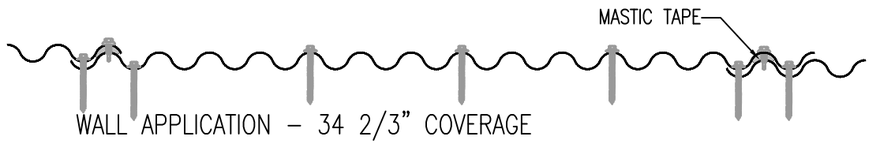

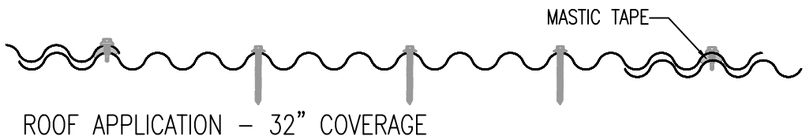

3 FASTENER DETAIL
SCALE 1-1/2" = 1'-0"

United States Department of Agriculture
Forest Service

R4
INTERMOUNTAIN REGION

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1		

PROJECT NAME

GAOA MESA FALLS VISITOR CENTER ROOF REPLACEMENT AND MAINT.

CARIBOU-TARGHEE NATIONAL FOREST

ASHTON / ISLAND PARK RANGER DISTRICT

DRAWING TITLE

ROOF DETAILS

DATE 04/04/2025	ARCHIVE NO. FS090523_R102013_L1-002.dwg
DESIGNER RKRA	DRAWING SHEET NO. A4.02
DRAWN RKRA	
CHECKED R.ANDERSON	
PROJECT NO.	SHEET 09 OF 09

5/16/25 14:00 RKALLEN C:\USERS\RKALLEN\BOX\ENG\DESIGN\CARIBOUTARGHEE\MESA\FALLS\BOARDWALK - VISITOR CENTER - 2024\DWG\MESAFALLS - PLANS - ELEVS - FINAL - 04.07.2025.DWG;