
AMENDMENT NO 05

United States Department of Agriculture
Forest Service


California
Plumas County

Plumas National Forest
Mt Hough Ranger District

Red Rock Lookout Renovation

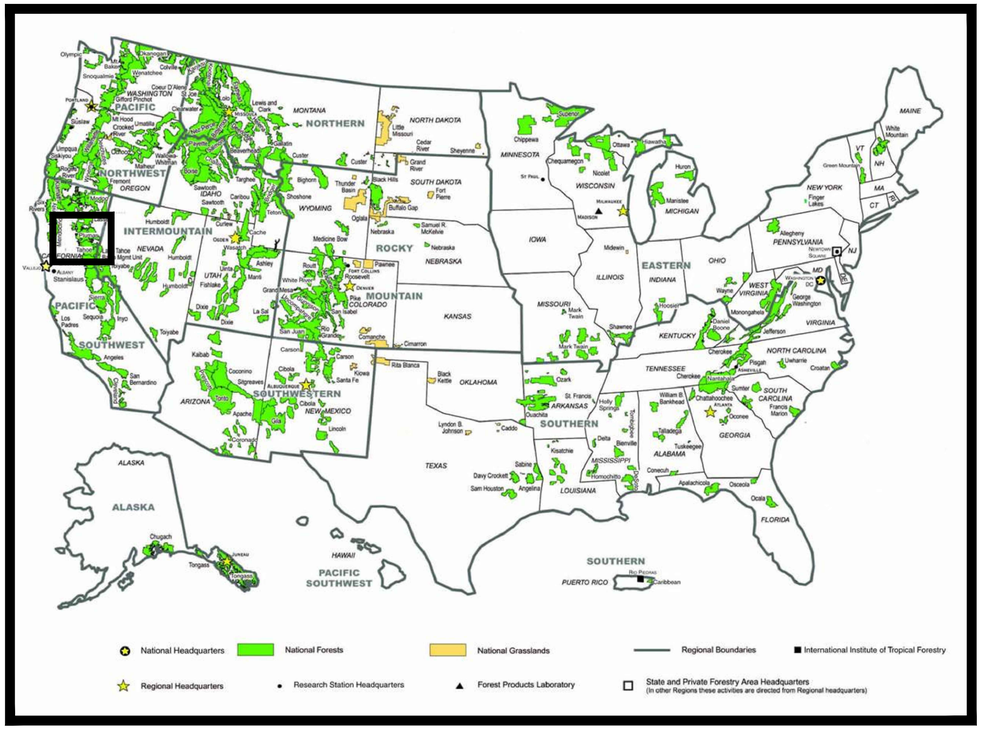

FOREST LOCATION MAP

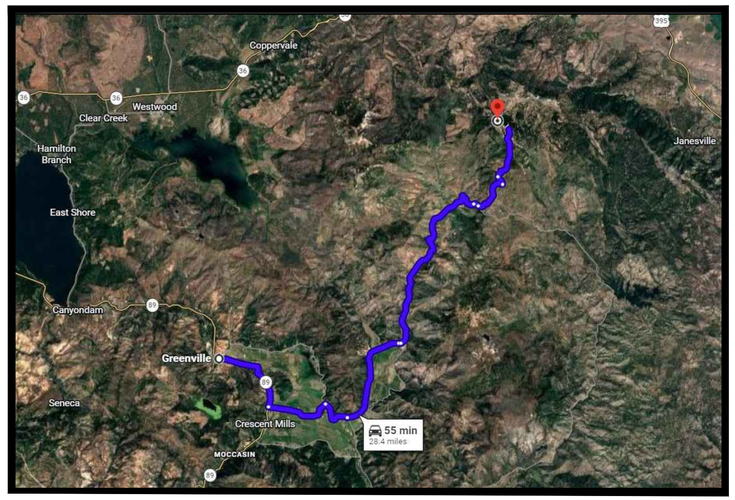

Map Data @2026 Google

PROJECT LOCATION MAP

TRAVEL DIRECTIONS:

From downtown Greenville, California, head south on Hwy 89. Turn left on to Stampfli Lane. After 3 miles, turn right on to North Valley Road. Continue on N Valley Rd for 1.5 miles, then turn left onto Diamond Mountain Road. Continue on Diamond Mountain Road towards the Lights Creek Area for approximately 15 miles. Turn left onto Diamond Mountain Road (County Road 213). Continue and turn right onto Forest Service Rd 28N02. Continue and stay to the left on 28N15A. Follow 28N15A until one has reached the designated lookout parking area.

INDEX OF SHEETS

SHEET	SHEET TITLE	DATE
G-01	COVERSHEET	04/16/26
D-01	EXTERIOR DEMO	09/29/26
D-02	EXTERIOR & INTERIOR DEMO	04/16/26
A-01	EXTERIOR ELEVATIONS	04/16/26
A-02	INTERIOR PLANS	09/29/26
A-03	UTILITIES	09/29/26
A-04	MISC DETAILS	04/16/26

RECOMMENDED BY:

FOREST ENGINEER _____ DATE _____

DISTRICT RANGER _____ DATE _____


FOREST SUPERVISOR _____ DATE _____

RO FACILITIES PROGRAM MANAGER _____ DATE _____


APPROVED:

DIRECTOR OF ENGINEERING _____ DATE _____

9/30/26 15:44 JZENI C:\USERS\JZENI\BOX7100ENGINEERING\#FACILITIES ENGINEER\01 - FACILITIES HISTORY BY LOCATION\MH - 3206 - RED ROCK LOOKOUT\GA\OA RED ROCK DESIGN\RED ROCK RENOVATION DESIGN.DWG;

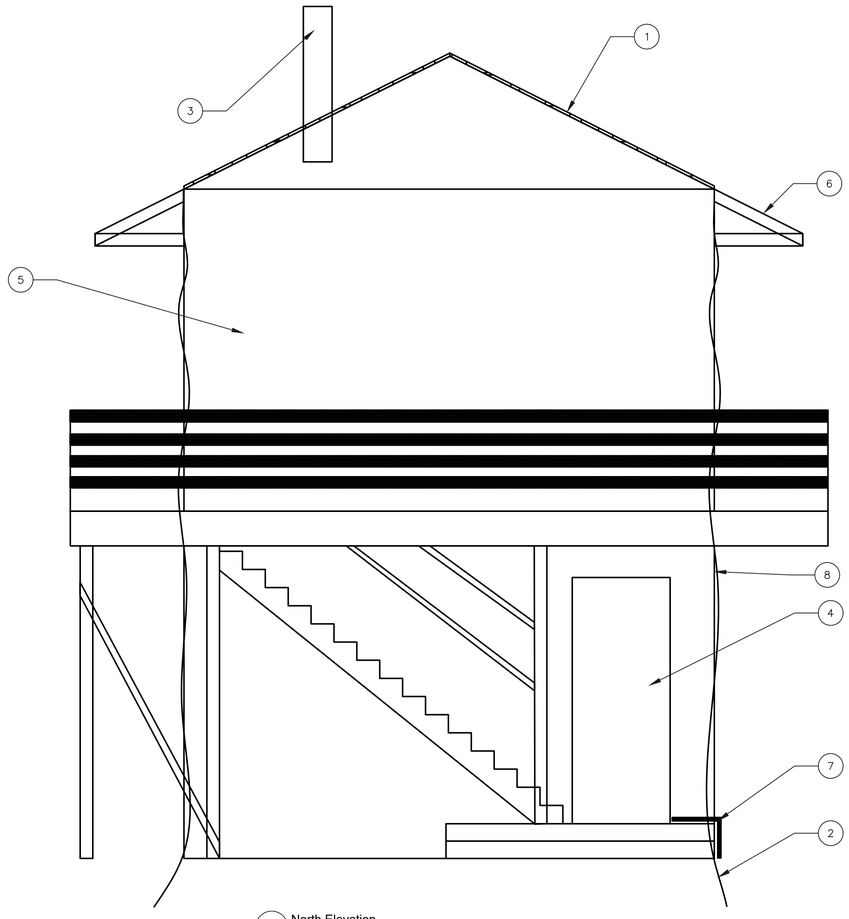

1 North Elevation

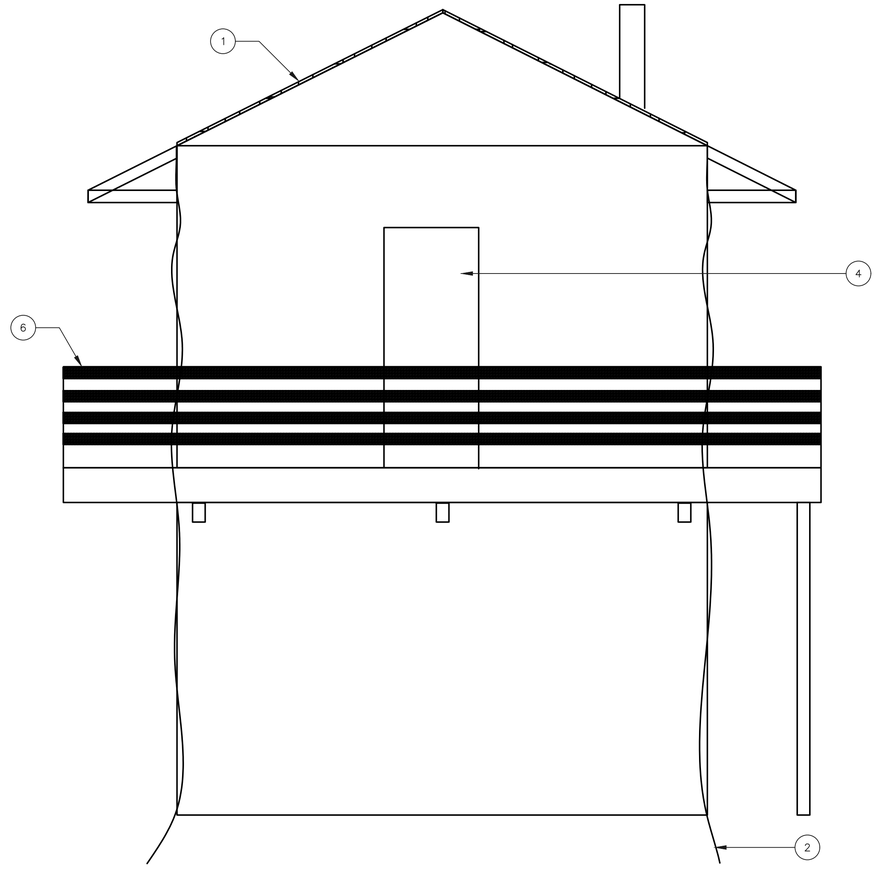

2 East Elevation

Key Notes:

1. Remove existing roofing down to sheathing.Reference prep requirements in Spec Section 07 31 00.
2. Remove all above ground existing lighting protection system infrastructure typical.
3. Remove existing chimney entirely and patch hole in sheathing and interior ceiling with like materials.
4. Remove existing door and any needed jamb material for install of new door frame.
5. Remove metal on shutters
6. Remove all loose paint and dispose of lead based paint according to Specification 02 83 19 typical for all exposed wood on the building.
7. Remove existing propane tank and all existing propane pipe including connection to fixtures on both levels.
8. Remove siding and trim from bottom of window sill to foundation on all sides.
9. Remove existing catwalk tread.

1

General Demo Notes:

- Windows and shutters not shown on drawing for clarity
- Similar Demo Scope on South and West Elevations.

United States Department of Agriculture
Forest Service

(R05)
Pacific Southwest

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1	Amendment 5	09/29/2026

PROJECT NAME

Red Rock LO Renovation

Plumas NF


Mt Hough RD

DRAWING TITLE


Exterior Demo

DATE 04/16/2026	ARCHIVE NO.
DESIGNER JZENI	DRAWING SHEET NO. D-01
DRAWN JZENI	
CHECKED	
PROJECT NO.	SHEET 002 OF 007


9/30/26 15:44 JZENI C:\USERS\JZENI\BOX\7100ENGINEERING\#FACILITIES ENGINEER\01 - FACILITIES HISTORY BY LOCATION\MM - 5206 - RED ROCK LOOKOUT\GAOA RED ROCK DESIGN\RED ROCK RENOVATION DESIGN.DWG;

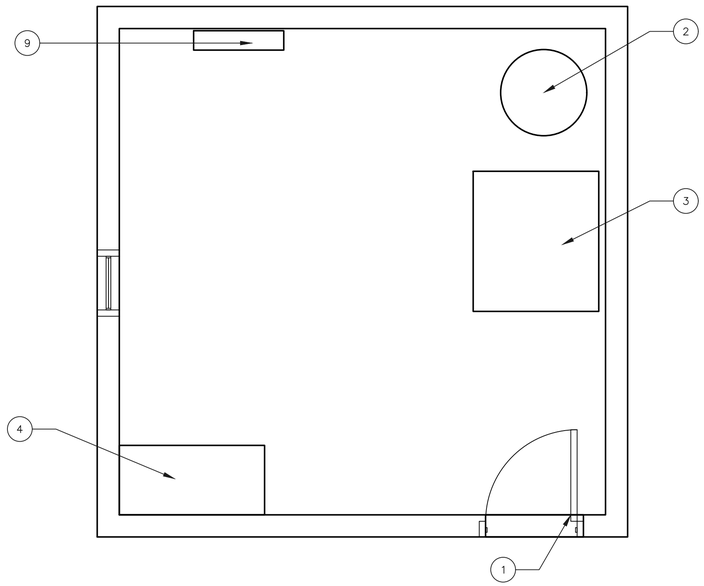

1 1st Floor Interior Plan

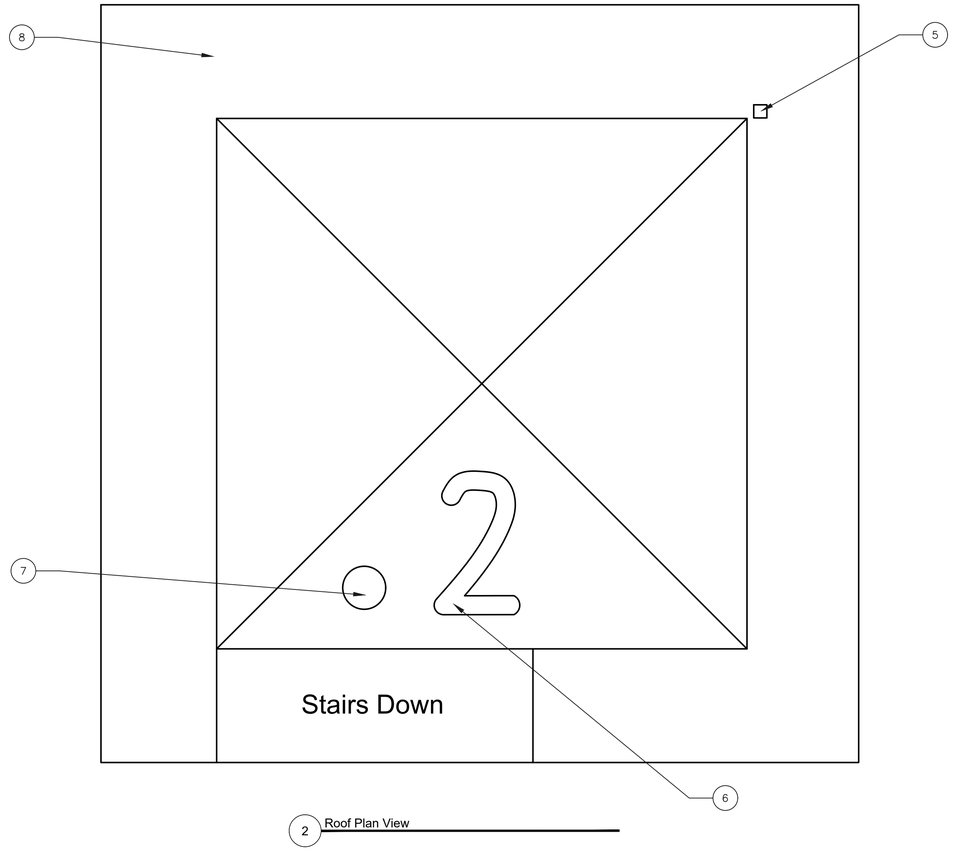

2 Roof Plan View

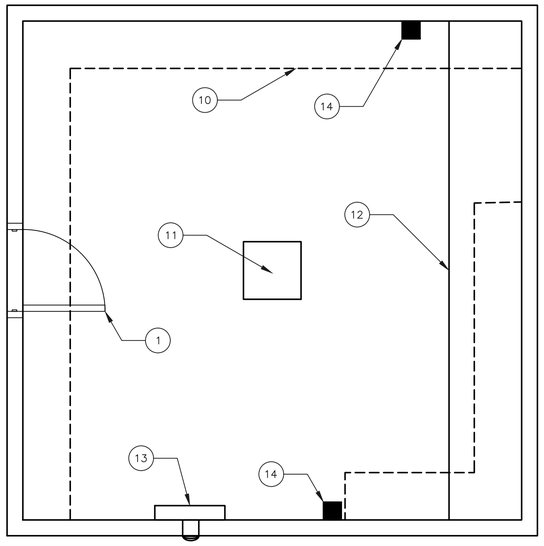

3 2nd Floor (Cab) Interior Plan

Key Notes:

1. Remove existing door frame and any necessary jamb material for install of new door and frame
2. Remove existing water heater and all associated piping infrastructure
3. Remove existing shower base and associated water supply and drain piping.
4. Existing cabinet. Keep in place.
5. Remove existing radio antennae and associated attachment infrastructure.
6. Remove existing roof number. Salvage if possible for reuse.
7. Remove existing chimney entirely and patch hole in sheathing and interior ceiling with like material.
8. Remove all loose paint and dispose of lead based paint according to Specification 02 83 19 typical for all exposed wood on the building.
9. Remove any existing solar system infrastructure including wiring and boxes.
10. Existing overhead cabinets typical. Keep in place.
11. Existing Fire Finder. Keep in place.
12. Remove existing cabinets, countertop and integrated infrastructure.
13. Remove existing wall heater and vent including propane piping
14. Remove lights typical. Salvage and turn over to Government.

N

United States Department of Agriculture
Forest Service

(R05)
Pacific Southwest

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1		

PROJECT NAME

Red Rock LO Renovation

Plumas NF


Mt Hough RD

DRAWING TITLE


Exterior & Interior Demo

DATE 04/16/2026	ARCHIVE NO.
DESIGNER JZENI	DRAWING SHEET NO. D-02
DRAWN JZENI	
CHECKED	
PROJECT NO.	SHEET 003 OF 007

9/30/26 15:44 JZENI C:\USERS\JZENI\BOX\7100ENGINEERING\#FACILITIES ENGINEER\01 - FACILITIES HISTORY BY LOCATION\MH - 5206 - RED ROCK LOOKOUT\GAOA RED ROCK DESIGN\RED ROCK RENOVATION DESIGN.DWG;

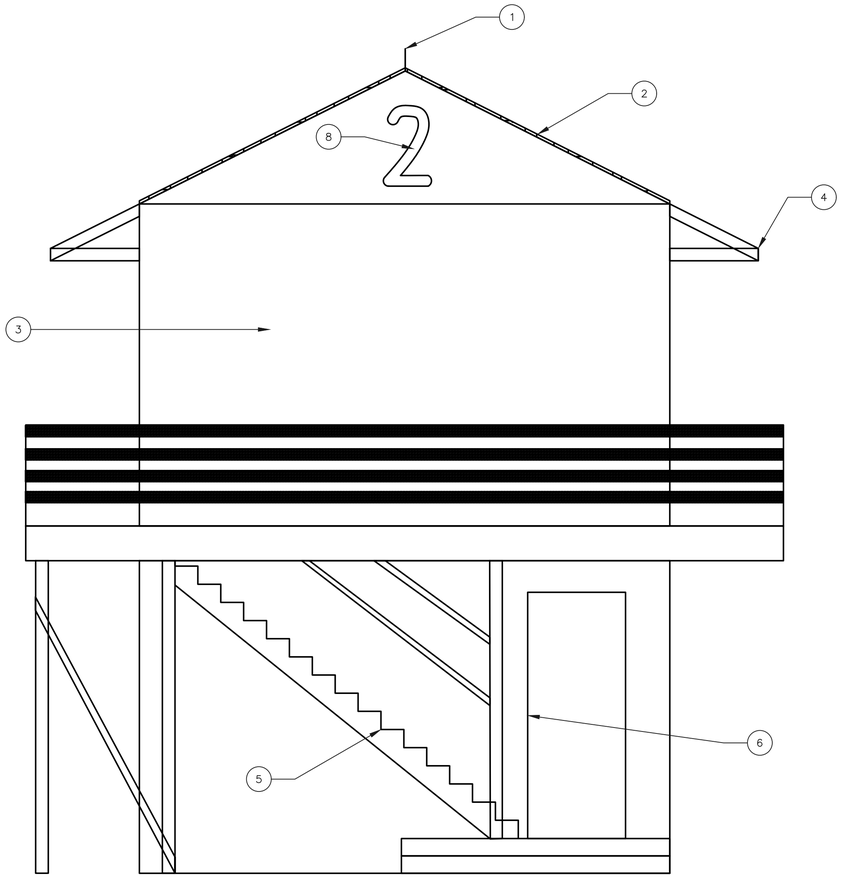

1 North Elevation

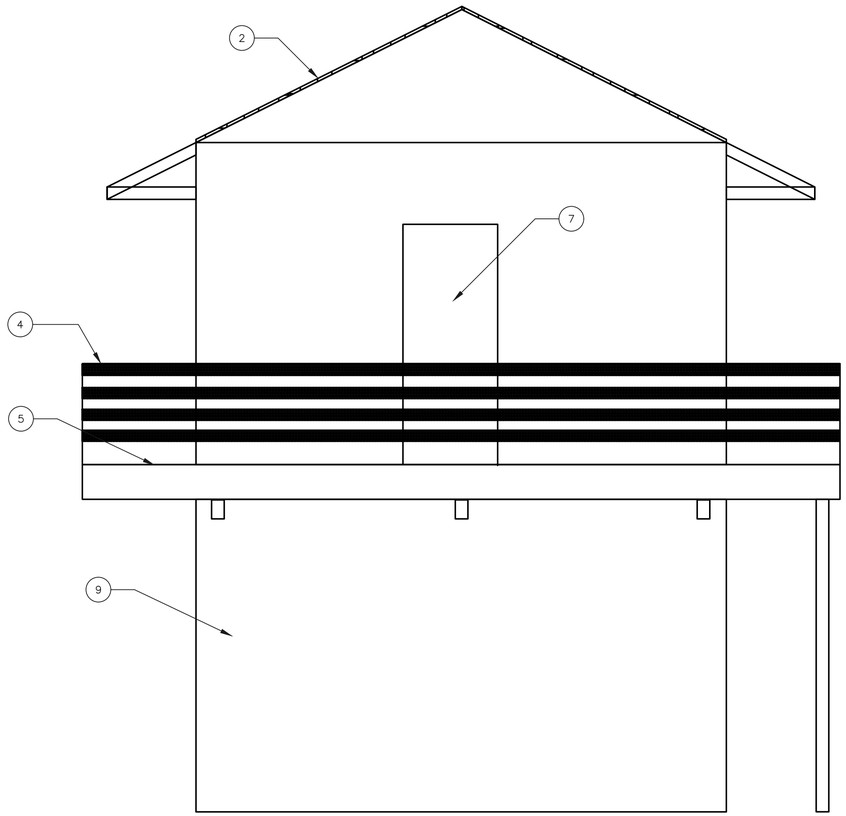

2 East Elevation

Key Notes:

1. Install new lighting protection system including air terminals and radials in compliance with NFPA 780.
2. Install new roofing per specification 07 31 00. Reference Detail 1/A-04
3. Replace any damaged shutter frame supports and paint shutter frame. Install new metal to match existing per Detail 2/A-04 & 2/A-04
4. Prep and paint all exterior wood typical. Reference Spec 09 90 00 .
5. Install new catwalk tread with like material. Paint stairs and walking surface with slip resistant texture. Reference Spec 09 90 00
6. New metal knock down door frame and HM door with hardware shown on A-04.
7. Install new door with glass lite to match height of lookout windows. Hardware shown on A-04.
8. Install metal number to match pre-demo size and location. Material to be salvaged or 16 Ga white aluminum. Reference 04/A-04 for support details.
9. Install new siding and trim to match what was removed. Install house wrap, Tyvek or similar, underneath siding. Use galvanized fasteners.

1

General Note:
Any and all penetrations must be foamed and overlayed with small wire mesh to prevent rodent infiltration. To occur before painting activities

USDA FOREST SERVICE

United States Department of Agriculture
Forest Service

(R05)
Pacific Southwest

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1		

PROJECT NAME

Red Rock LO Renovation

Plumas NF


Mt Hough RD

DRAWING TITLE


Exterior Elevations

DATE 04/16/2026	ARCHIVE NO.
DESIGNER JZENI	DRAWING SHEET NO. A-01
DRAWN JZENI	
CHECKED	
PROJECT NO.	SHEET 004 OF 007


9/30/26 15:44 JZENI C:\USERS\JZENI\BOX\7100ENGINEERING\#FACILITIES ENGINEER\01 - FACILITIES HISTORY BY LOCATION\MH - 5206 - RED ROCK LOOKOUT\GA\OA RED ROCK DESIGN\RED ROCK RENOVATION DESIGN.DWG;

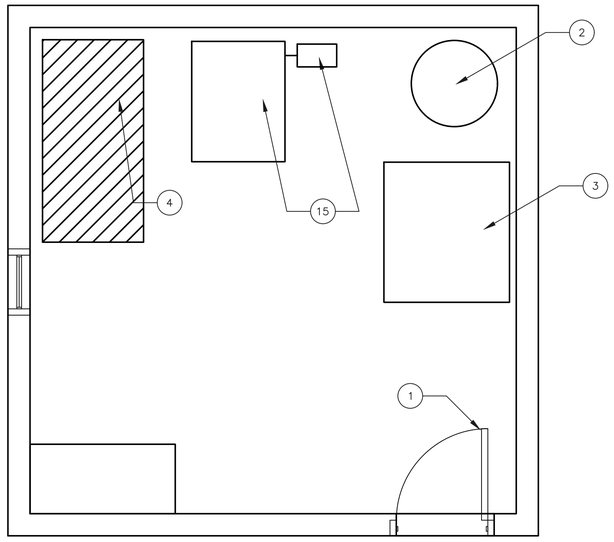

1 1st Floor Interior Plan

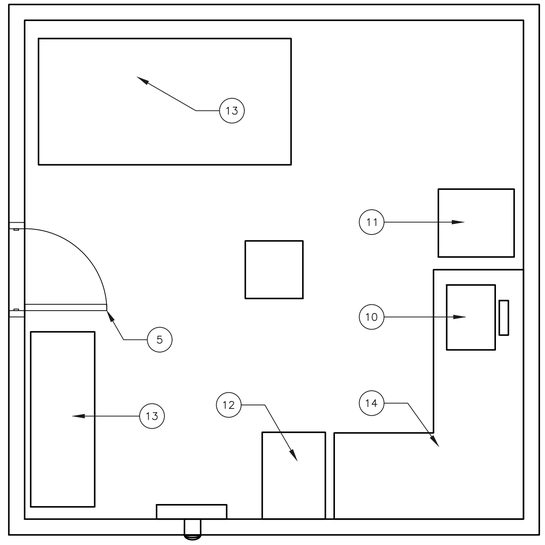

2 2nd Floor (Cab) Furniture Plan
Not to Scale

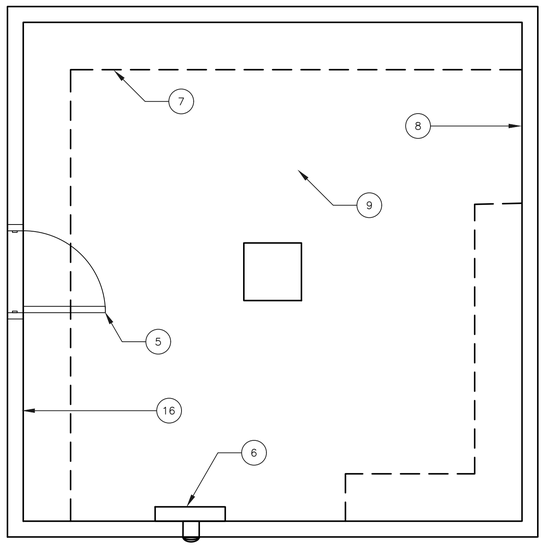

3 2nd Floor (Cab) Interior Plan

General Note:
Any and all penetrations must be foamed and overlayed with small wire mesh to prevent rodent infiltration. To occur before painting activities

Key Notes:

1. Install new HM door and door frame. Paint to match exterior of Lookout. Hardware shown on A-04
2. Install new minimum 30 gal propane water heater with high elevation propane orifice and associated piping infrastructure including proper direct vent, pressure relief valve, pan, and drain. (1)
3. Install new standalone shower stall, Durastall Model 68 or similar, and associated piping infrastructure.
4. Install controllers, equipment and batteries for a fully functional solar system. See spec 26 31 00.
5. Install new door with glass lite to match height of lookout windows. Hardware shown on A-04. Paint exterior in white to match lookout exterior and interior in color coordinated with Government.
6. Install Williams propane wall heater model 1403821 with high altitude propane orifice kit 8A144 with orifice P090561 through existing vent hole.
7. Refinish existing cabinets and paint in color coordinated with the Gov. Replace and damaged or non-functional hardware in-kind.
8. Prep and paint all exposed wood walls. Reference Spec 09 90 00.
9. Clean, Sand, Stain, and clear coat existing wood floor and ceiling, see 09 90 00.
10. Install and plumb drop in sink, Elkay ECTSRAD25226TBG or equal, and faucet, Elkay HDFAV1411 or equal.
11. Furnish/Install Unique UGP-3 SM W fridge or equal.
12. Furnish/Install Unique UGP-20G OF1 W stove or equal.
13. Desk and bed. Not in Contract. Supplied and installed by Gov.
14. General cabinet layout shown. Contractor to provide shop drawings detailing all dimensions and drawer/door layout. Cabinets to be painted in color coordinated with Gov. Back of cabinets visible through windows shall be painted to match exterior. Reference Spec 12 35 30.
15. Install new 200 gal vertical water tank with pump and pressure tank, $\frac{1}{2}$ HP Everbuilt SKU1001187540 or equal. Tie into water piping infrastructure.
16. Remove existing wood patch, remove any debris, foam, place small wire mesh and replace wood trim to match existing.

USDA FOREST SERVICE
United States Department of Agriculture
Forest Service
(R05)
Pacific Southwest

STAMPS, LOGOS, AND SEALS


NO.	REVISION / ISSUE	DATE
4		
3		
2		
1	Amendment 5	09/29/2026

PROJECT NAME
Red Rock LO Renovation
Plumas NF
Mt Hough RD


DRAWING TITLE
Interior Plans

DATE 04/16/2026	ARCHIVE NO.
DESIGNER JZENI	DRAWING SHEET NO. A-02
DRAWN JZENI	
CHECKED	
PROJECT NO.	SHEET 005 OF 007

9/30/26 15:44 JZENI C:\USERS\JZENI\BOX\100ENGINEERING\#FACILITIES ENGINEER\01 - FACILITIES HISTORY BY LOCATION\MH - 5206 - RED ROCK LOOKOUT\GAOA RED ROCK DESIGN\RED ROCK RENOVATION DESIGN.DWG;

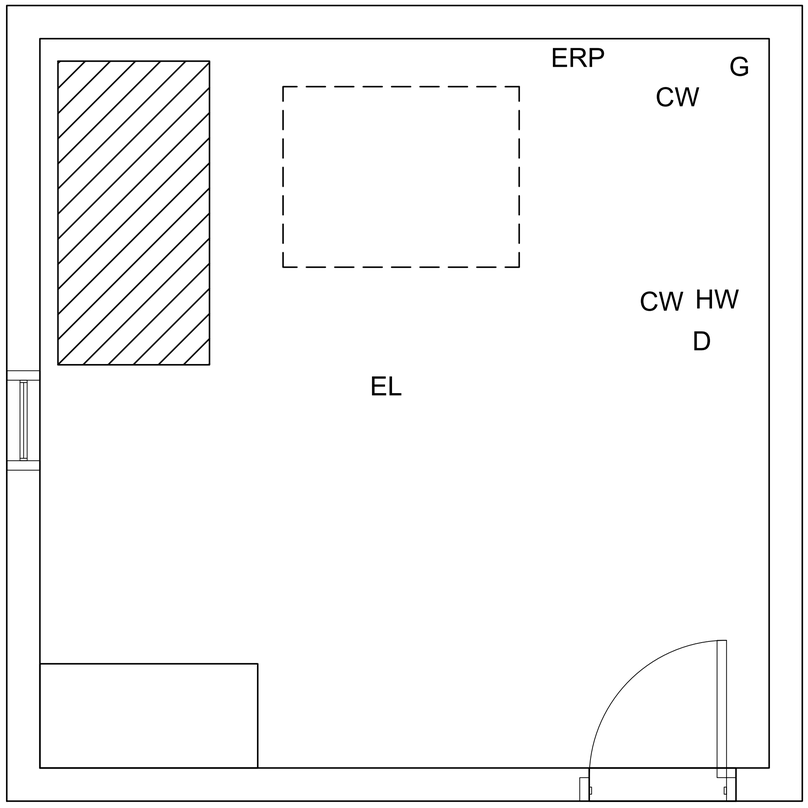

1 1st Floor Utilities Plan
Not to Scale

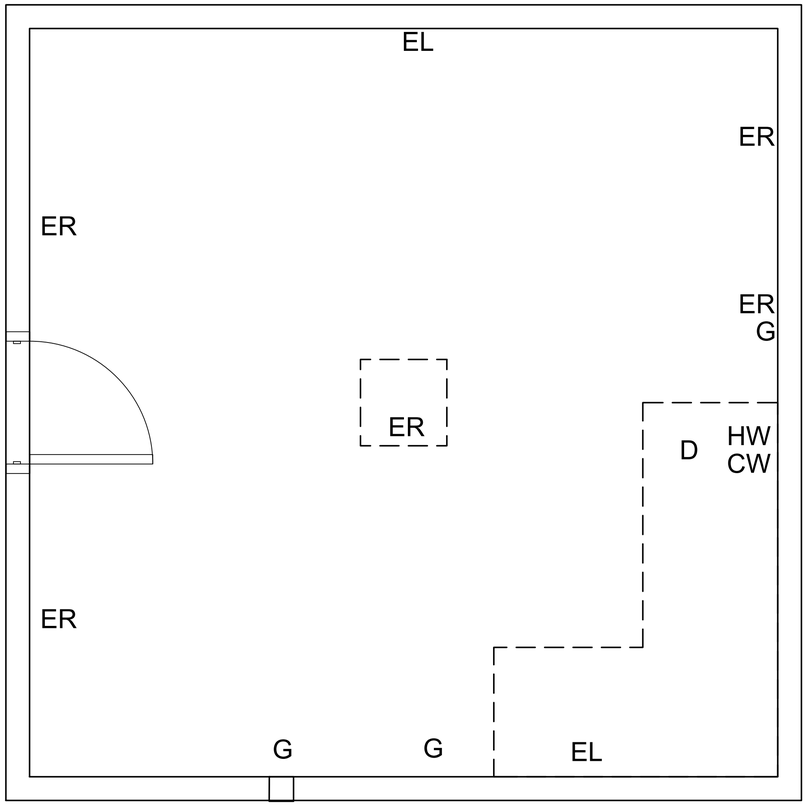

2 2nd Floor (Cab) Utilities Plan
Not to Scale

Legend/Notes:

ER = 15A 120V Electrical receptacle
ERP = 20A 120V Electrical receptacle for water pump only
EL = Electric Light fixture with switch.
G = Gas connection with shutoff valve
HW = Hot water supply with shut off valve
CW = Cold water supply with shut off valve
D = Drain with piping to exterior using existing holes in building exterior, Reference detail 5/A-04

1. Approximate locations shown. Contractor to coordinate with Government for exact locations.
2. Routing of CW and HW piping not shown. Contractor to field fit.
3. Low point drain to exterior for CW/HW lines to be provided for winterization of system.
4. Light fixture in 1st floor - 11" Low Profile LED Ceiling mount.
5. Light fixture in cab - White Innovations Lighting 516-1W-WPC-G422 with LED bulb or equal in similar shape to existing propane fixtures.

6. Propane Tank: Propane tank to be provided and installed in same location as existing propane tank in coordination with Government COR. Connection from tank to gas connections shown on plans to be provided. Routing of pipe to be mainly on the interior of the building in coordination with the COR.

1

United States Department of Agriculture
Forest Service

(R05)
Pacific Southwest

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1	Amendment 5	09/29/2026

PROJECT NAME

Red Rock LO Renovation

Plumas NF


Mt Hough RD

DRAWING TITLE


Utilities

DATE 04/16/2026	ARCHIVE NO.
DESIGNER JZENI	DRAWING SHEET NO. A-03
DRAWN JZENI	
CHECKED	
PROJECT NO.	SHEET 006 OF 007


9/30/26 15:44 JZENI C:\USERS\JZENI\BOX\7100ENGINEERING\#FACILITIES ENGINEER\01 - FACILITIES HISTORY BY LOCATION\MH - 5206 - RED ROCK LOOKOUT\GAOA RED ROCK DESIGN\RED ROCK RENOVATION DESIGN.DWG;

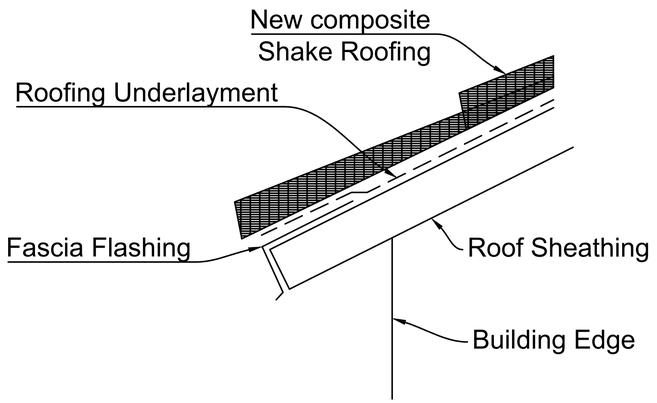


1 Typical Roof Assembly
Not to Scale

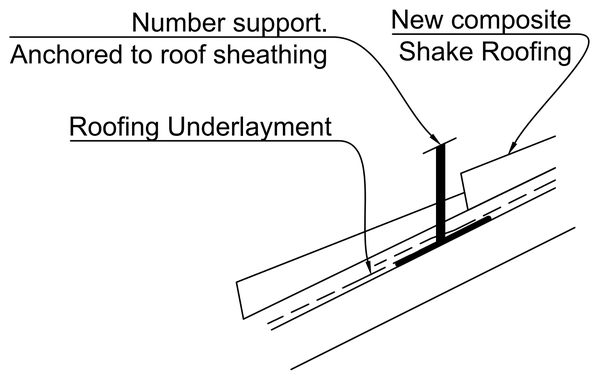

4 Typical Number Support Detail
Not to Scale

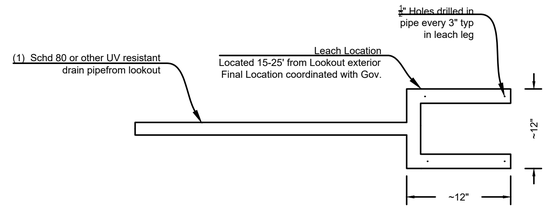


Plan

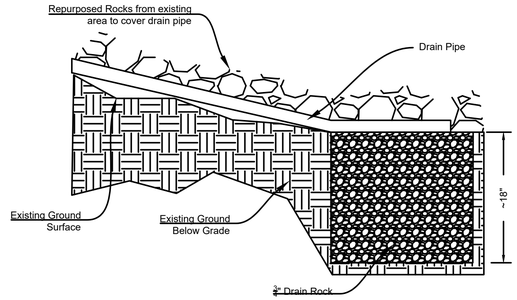


Elevation

Location of Leach Hole to be coordinated in Field with Government.

5 Drain Waste Details
Not to Scale

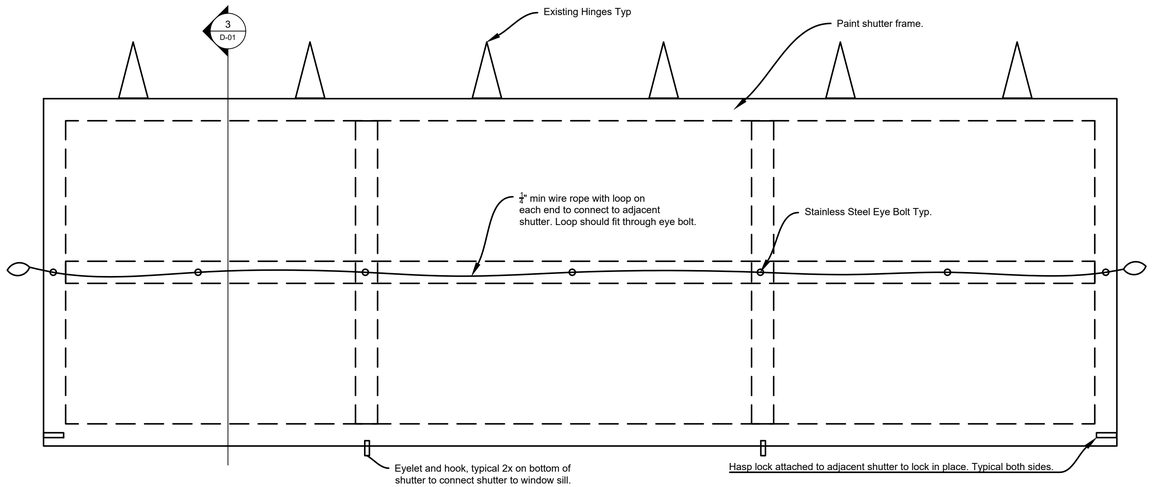

2 Typical Shutter Elevation
Not to Scale

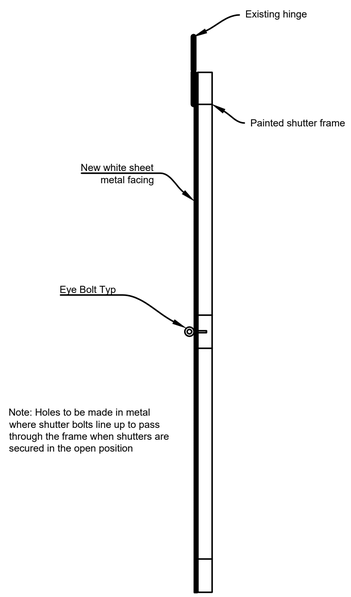

Note: Holes to be made in metal where shutter bolts line up to pass through the frame when shutters are secured in the open position

3 Shutter Section
Not to Scale

Door Hardware

(Reference Spec 087000 and coordinate with door type required):

1st Floor:
- (3) ea. Hinge
- (1) ea. Threshold
- (1) ea. Door Sweep
- (1) ea. Weatherstripping Kit
- (1) ea. Exterior Lockset Schlage ND Series or Equal
- (1) ea. Deadbolt w/ interior thumb turn

2nd Floor/Cab:
- (3) ea. Hinge
- (1) ea. Threshold
- (1) ea. Door Sweep
- (1) ea. Weatherstripping Kit
- (1) ea. Schlage Andover Knob Keyed Entry Lock or Equal
- (1) ea. Externally mounted deadbolt w/ interior thumb turn

*Keys for all locks to be the same.

USDA FOREST SERVICE

United States Department of Agriculture
Forest Service

(R05)
Pacific Southwest

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1		

PROJECT NAME

Red Rock LO Renovation

Plumas NF

Mt Hough RD

DRAWING TITLE

Misc Details

DATE 04/16/2026	ARCHIVE NO.
DESIGNER JZENI	DRAWING SHEET NO. A-04
DRAWN JZENI	
CHECKED	
PROJECT NO.	SHEET 007 OF 007

9/30/26 15:44 JZENI C:\USERS\JZENI\BOX710\ENGINEERING\#FACILITIES ENGINEER\01 - FACILITIES HISTORY BY LOCATION\MH - 5206 - RED ROCK LOOKOUT\GAOA RED ROCK DESIGN\RED ROCK RENOVATION DESIGN.DWG;