AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT

1. CONTRACT ID CODE	PAGE	OF	PAGES
	1		11

2. AMENDMENT/MODIFICATION NUMBER	3. EFFECTIVE DATE	4. REQUISITION/PURCHASE REQUISITION NUMBER	5. PROJECT NUMBER *(If applicable)*
0001	09/24/2026		

6. ISSUED BY CODE LHA

BLM OR-ST OFC PROC MGMT BR(OR952)
1220 SW 3rd Avenue, 12th Floor
PORTLAND OR 97204

7.ADMINISTERED BY *(If other than Item 6)* CODE

8. NAME AND ADDRESS OF CONTRACTOR *(Number, street, county, State and ZIP Code)*

CODE FACILITY CODE

(X) 9A. AMENDMENT OF SOLICITATION NUMBER 140L4326Q0127

☒ 9B. DATED *(SEE ITEM 11)* 09/24/2026

10A. MODIFICATION OF CONTRACT/ORDER NUMBER

☐

10B. DATED *(SEE ITEM 13)*

11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS

☒ The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offers ☐ is extended. ☒ is not extended.

Offers must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended, by one of the following methods: (a) By completing items 8 and 15, and returning 1 copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter or electronic communication which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by letter or electronic communication, provided each letter or electronic communication makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.

12. ACCOUNTING AND APPROPRIATION DATA *(If required)*

13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS. IT MODIFIES THE CONTRACT/ORDER NUMBER AS DESCRIBED IN ITEM 14.

CHECK ONE

☐ A. THIS CHANGE ORDER IS ISSUED PURSUANT TO: *(Specify authority)* THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NUMBER IN ITEM 10A.

☐ B. THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES *(such as changes in paying office, appropriation data, etc.)* SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR 43.103(b).

☐ C. THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:

☐ D. OTHER *(Specify type of modification and authority)*

E. IMPORTANT: Contractor ☐ is not ☐ is required to sign this document and return _____ copies to the issuing office.

14. DESCRIPTION OF AMENDMENT/MODIFICATION (*Organized by UCF section headings, including solicitation/contract subject matter where feasible.)*

See continuation page

Except as provided herein, all terms and conditions of the document referenced in Item 9A or 10A, as heretofore changed, remains unchanged and in full force and effect.

15A. NAME AND TITLE OF SIGNER *(Type or print)*		16A. NAME AND TITLE OF CONTRACTING OFFICER *(Type or print)*	
		Matthew Duane	
15B. CONTRACTOR/OFFEROR	15C. DATE SIGNED	16B. UNITED STATES OF AMERICA	16C. DATE SIGNED
(Signature of person authorized to sign)		*(Signature of Contracting Officer)*	

Previous edition unusable

STANDARD FORM 30 (REV. 11/2016)
Prescribed by GSA FAR (48 CFR) 53.243

ITEM NO. (A)	SUPPLIES/SERVICES (B)	QUANTITY (C)	UNIT (D)	UNIT PRICE (E)	AMOUNT (F)
	HVAC REPAIR JV RESOURCE, JORDAN VALLEY OREGON The purpose of this amendment is to answer questions submitted by interested contractors. Period of Performance: 10/30/2026 to 11/30/2026				

140L4326Q0127 HVAC Repair
Jordon Valley, Oregon

Questions and Answers

1. Please confirm the replacement refrigerant/equipment requirement. C.5.1 refers to removing R-22, C.5.2 calls for R-32, and C.2.3 includes discontinued-product wording. Should the quote include a complete new matched R-32 system and any necessary piping/code modifications?
    a. Yes, the new system shall utilize R-32 refrigerant.
2. Does H.15.2 require performance and payment bonds for this procurement despite the stated under-$25,000 magnitude? If so, please confirm the required bond amounts.
    a. A Bid Bond is not required. The magnitude of this acquisition is Below $25,000.00. If your proposal submission is below $35,000.00, performance and payment bonds are not required according to FAR 52.228-13 and FAR 52.228-15. Contractors are reminded that any amount awarded over $35,000 according to FAR 52.228-13 requires submission of a Payment Bond. According to FAR 52.228-15 any amount over $150,000.00 requires both payment and performance bonds. If the thresholds in FAR 52.228-13 and FAR 52.228-15 are met, then bonds are due no later than 10 calendar days after award.
3. May the two similar projects be those of our named installation subcontractor, with its role clearly identified? Are there specific prime self-performance requirements we should address?
    a. No, the “similar projects” must be the relevant experience of the contractor submitting the proposal. If the contractor submitting the proposal was the prime contractor or subcontractor on the project, you may use that as your relevant experience and clarify if you served as prime contractor or subcontractor. You may not use the relevant experience of another contractor. You must have served as the prime contractor or subcontractor on the project.
4. **COI:** We would like to know if the subcontractor's insurance would satisfy the requirement, or is it mandatory for the prime to hold a COI.
    a. The subcontractor’s insurance does not satisfy the requirement. The Prime Contractor must have liability insurance. According to DIAR 1452.228-70 (a) “The Contractor shall procure and maintain during the term of this contract and any extension thereof liability insurance in form satisfactory to the Contracting Officer by an insurance company which is acceptable to the Contracting Officer. The named insured parties under the policy shall be the Contractor and the United States of America.” For more details on the

requirements for the liability insurance review 1452.228-70 in full text in the solicitation.

5. Could you please provide the full-size project drawings, HVAC plans, equipment layout, and any specification or drawing attachments referenced in Section C of the solicitation?
    a. Yes, there is a site plan and HVAC dwg.
6. Refrigerant Line Set: The specifications do not address the existing refrigerant line set. Because the system is converting from R-22 to R-32, should offerors price a new line set, or reuse and flush the existing line set?
    a. Yes, new refrigerant line sets shall be used in new system.
7. Refrigerant (C.2.3): The specification states that recycled or recovered refrigerant is acceptable because the product is no longer in production. Since the new equipment will be charged with R-32, which is currently manufactured, please confirm that new R-32 refrigerant is acceptable and expected.
    a. Yes, new R-32 refrigerant is acceptable and expected.
8. Existing Equipment Data: Can the Government provide the make, model, and serial numbers of the existing condenser and air handler, along with photos of the indoor unit location and electrical disconnect?
    a. Please see attached images.
9. We are considering an Idaho-licensed HVAC subcontractor for the Jordan Valley Guard Station HVAC replacement. Could you please clarify whether the subcontractor must hold an active Oregon Construction Contractors Board (CCB) license to perform this work, or whether any exemption applies because the work is being performed at a federal facility?
    a. Licensed contractors in Idaho is acceptable.
10. Please also confirm whether the electrical disconnection and reconnection must be performed by personnel holding applicable Oregon electrical licenses, or whether Idaho credentials are acceptable for this project.
    a. Idaho credentials are acceptable.
11. Q1. Would you be able to provide us with sufficient on-site photos showing the existing HVAC equipment, installation conditions, connections, surrounding work area, and any other relevant details? Q2. Since the October 7 site visit has passed, can the Government provide photos and nameplate data (make, model, tonnage) of the existing indoor and outdoor units? Alternatively, is another site visit possible?
    a. Q1, yes. Q2, another site visit would be possible at the end of October.
12. The Section C page header reads "HVAC Compressor Replacement," and C.5.1 and the Section J attachment refer to compressor removal and a unit that needs a compressor replacement, while C.1.1, C.2, and C.5.2 describe removing and

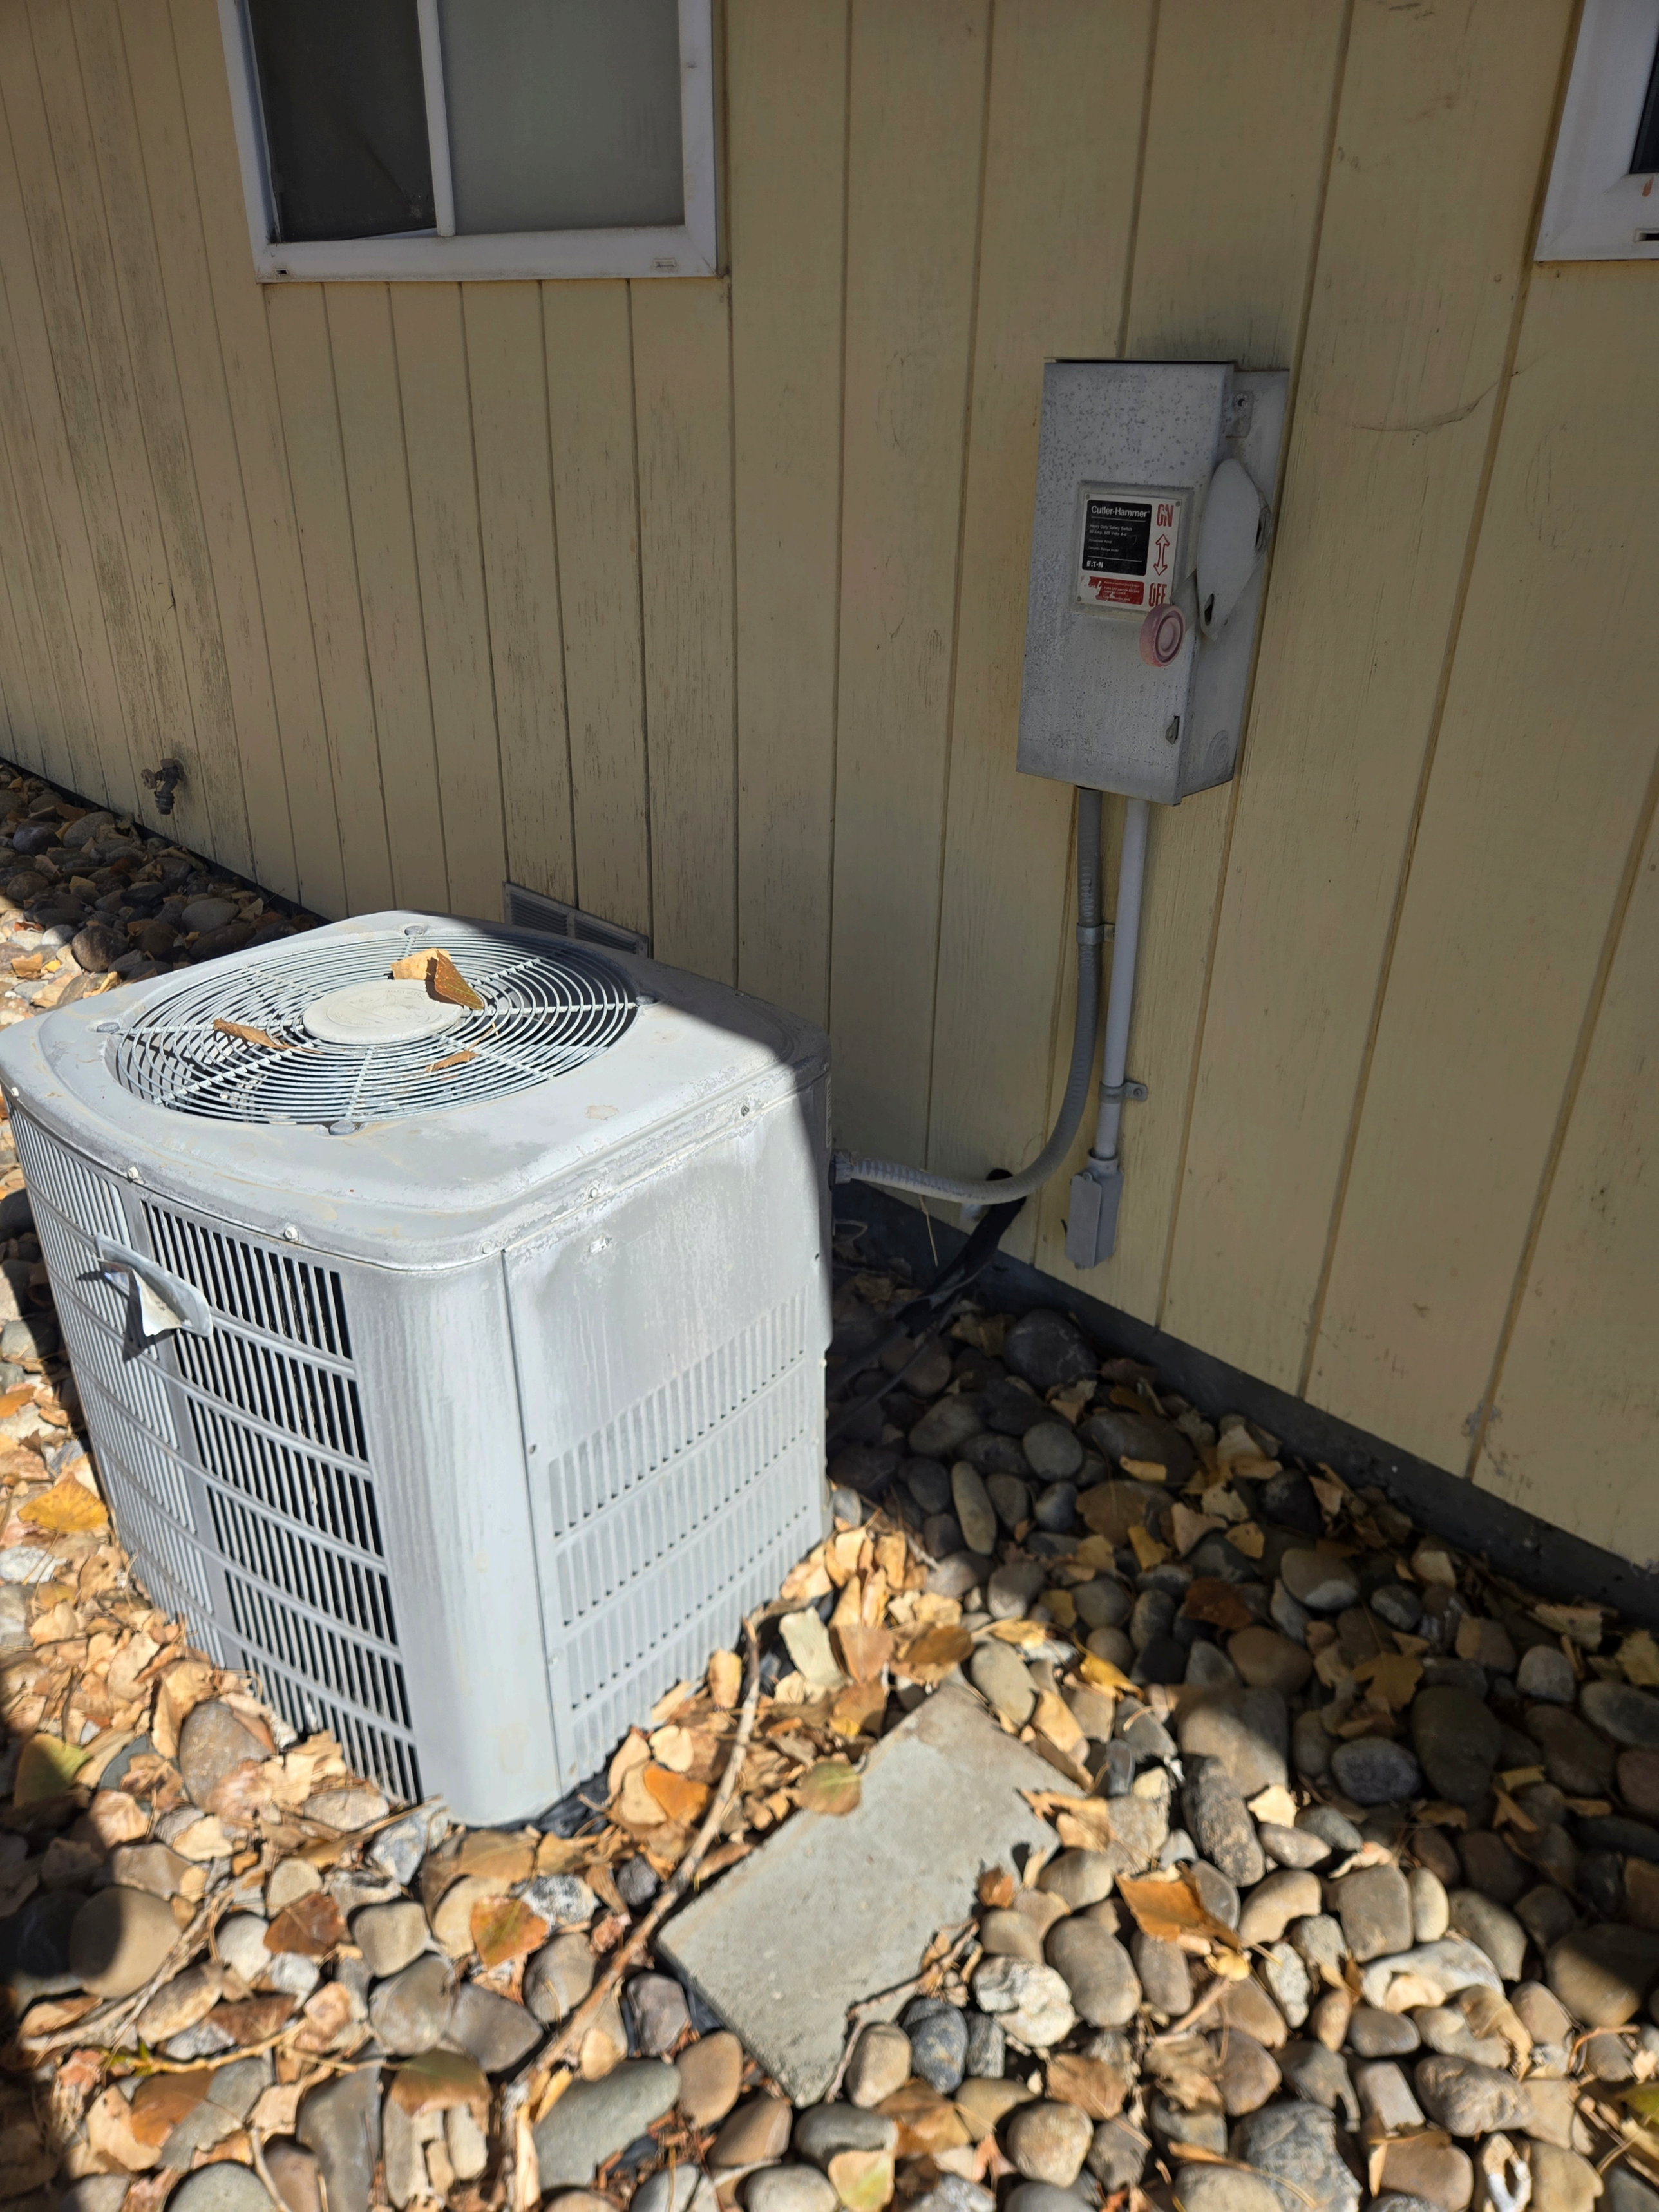
replacing the 2.5-ton heat pump, heat pump condenser, and air handler. Please confirm that the requirement is a full heat pump system replacement (outdoor unit and air handler), not a compressor replacement only.

a. Yes, a full system replacement is required for an indoor and outdoor until.

13. If available, please provide the make, model, and tonnage (and nameplate airflow, if known) of the existing outdoor unit and air handler.
    a. Please see attached images.
14. The solicitation calls for a 2.5-ton heat pump system with a single-stage rotary compressor, 30,000 BTU cooling, and 30,000 BTU heating, along with an air handler. Would the procurement office consider an inverter heat pump with an electric air handler and backup heat strips for when the heat pump isn't as efficient below -10 degrees. Please confirm whether this would be acceptable, or if the quoted equipment must strictly be single stage as specified.
    a. New system shall have auxiliary and or backup heat electric strips.
15. The SOW document calls for a rotary compressor in the replacement condensing unit. Will a condensing unit with a swing compressor be an acceptable substitution?
    a. Yes, compressor can be swing or scroll.
16. Will R454B refrigerant equipment be considered compatible with R-32 requirement listed in the SOW document?
    a. No.
17. Is the existing refrigerant line-set able to be re-used with the new equipment provided the line-set is flushed and pressure tested before re-use?
    a. No.
18. Is there electric heat strips present in the existing air handler?
    a. Yes.
19. Q1. Is R-454a a suitable refrigerant in place of R-32? (Daikin, Amana, and Goodman use R32. Most other brands i.e. Carrier, Bryant, Lennox, Trane, York use R-454b) Q2. Refrigerant (C.2.3 and C.5.1): The existing system uses R-22, and the new system is to be charged with R-32. C.2.3 says recycled or recovered refrigerant is acceptable because the product is no longer in production. Please confirm that the intent is a new R-32 system charged with new R-32 refrigerant, and that the recycled-refrigerant note refers to R-22.
    a. Q1, No. Q2, yes the intent is to have a new R-32 system.
20. Air filtration - none is specified. Is there a filter in the return grill? Will we provide a media filter box and media filter with the installation?
    a. Yes media filter box and filter shall be provided. Contractor shall ensure new media filter box and filter will fit air handler location prior to installation.

21. Thermostat - no thermostat replacement is specified. Is that correct? And if not, are there any specific requirements for a new thermostat?
    a. A new thermostat is required. New thermostat shall be heat pump thermostat with backup/auxiliary heat capabilities.
22. Warranty terms - Due to the travel distance of this project, I want to clarify that a trip-charge (ours is $275 to Jordan Valley) is not included in the terms of the parts and labor warranty.
    a. Warranty shall be best commercial warranty available with one year including labor warranty.
23. Refrigerant Lines - Replacement of refrigerant lines is not specified. Is flush and pressure testing sufficient or is it expected that the refrigerant lines will be replaced?
    a. Refrigerant lines are to be replaced.
24. If we use RLS press fittings exclusively on refrigerant line connections, with no brazing, welding, or other open-flame work, can we be exempted from the three-hour fire watch and firefighting equipment requirements?
    a. No.
25. I want to confirm that the bid will be delivered to you via this same e-mail address. Is that acceptable?
    a. Please see instructions for the submission of proposals in Section L of the solicitation.
26. Could you please confirm the required kW capacity for the backup electric heat to be installed in the AHU?
    a. 10.
27. Could you confirm the building classification for this specific unit? Specifically, is it a single-family residence or crew housing? Does it allow the work to be filed under the residential minor label program?
    a. Crew housing and yes work can be filed under the residential minor label program.
28. Is the scroll compressor acceptable for this requirement?
    a. Yes.
29. Equipment (C.1.1 and C.2): Please confirm the scope is one 2.5-ton split heat pump system: one outdoor heat pump condensing unit (30,000 BTU) and one indoor multi-poise air handler. Or are separate additional units required?
    a. No other units are required.
30. Line set: Should the refrigerant line set be replaced with the equipment, or may the existing lines be flushed and reused if they are compatible with R-32? Please provide the approximate line set length and the location of the indoor and outdoor units.
    a. Refrigerant lines are to be replaced. Approximate line set length is 50’.

31. Electrical: May the existing disconnect, breaker and circuit be reused if they meet the new equipment's requirements, or should new electrical work be included?
    a. Yes, existing electrical can be used if they meet manufacturers' electrical requirements.
32. Wages: The solicitation includes both Davis-Bacon (52.222-6) and Service Contract Labor Standards clauses. Please confirm which applies and provide the applicable wage determination for Malheur County, Oregon.
    a. The Davis-Bacon Act applies. The Wage Determination is attached to solicitation.
33. Thermostat and condensate: Should a new thermostat and condensate line or pump be included?
    a. New thermostat is required.


Cutler-Hammer
ON
OFF

Heritage 10

MFR DATE 09/96

MOD. NO. 6H0030A100A2 VOLTS 200/230

SERIAL NO. L28171MCF PH 1 HZ 60

MINIMUM CIRCUIT AMPACITY 19.0 AMPS

OVERCURRENT PROTECTIVE DEVICE	USA	CANADA
RECOMMENDED FUSE / BREAKER (HACR)	30	30
MAX FUSE / BREAKER (HACR)	30	30

HCFC - 22 5 LBS. 04 OZ. OR 2.38 Kg(ea)

BAYFCCV 067A REQUIRED INDOORS FOR RATED PERFORMANCE OUTDOOR USE

AMERICAN STANDARD INC
TYLER, TX 75711-9010 MADE IN USA

COMPR. MOT.	15.0	RLA	200/230 V 79 LRA
O.D. MOT.	.75	FLA	200/230 V 1/10 HP
M.E.A. NO.	179-94E		F. ID. T76

DESIGN PSI - HIGH 300 LOW 300


WARNING
CAUTION
Rheem
RHEEMGLAS
IMPERIAL PLUS
FARBERWARE

TRANE

American Standard Inc.
The Trane Company
Tyler, TX 75711-9010

Made in USA

MODEL NO.	SERIAL NO.	MOTOR H.P.	F.L. AMPS	VOLTS	PH HZ
TWE030C140A1	M22333W1V	1/3	2.1	200-230	

ELECTRIC HEATER-208 OR 240V, 60Hz, 1 PH OR 3 PH — FACTORY INSTALLED [ ] — MAY BE FIELD INSTALLED [X]

REFRIGERANT 22 ONLY TEST PRESSURE 300 PSI — MFR. DATE 05/97

UNLESS INDICATED "NA" ANY ONE OF THE FOLLOWING HEATERS MAY BE INSTALLED IN THIS UNIT. INSTALLER MUST MARK ONE APPROPRIATE BLOCK IN COLUMN A.

A	TRANE HEATER MODEL	SUPPLY VOLTS	PHASE	KW	HEATER AMPS	MIN. BRANCH CIRCUIT AMPACITY	MAX. FUSE OR HACR TYPE CIRCUIT BREAKER	MIN. HEATING BLOWER SPEED W/O HEAT PUMP	MIN. HEATING BLOWER SPEED WITH HEAT PUMP
	NONE	USE ACCESSORY PLATE BAY 99 X 123							
	BAY96X1405	208 240	1	3.60 4.80	17.3 20	24 28	25 30	LOW	LOW
	BAY96X1406	208 240	1	4.33 5.76	20.8 24	29 33	30 35	LOW	LOW
	BAY96X1408	208 240	1	5.77 7.68	27.7 32	37 43	40 45	LOW	LOW
	BAY96X1410	208 240	1	7.21 9.60	34.7 40	46 53	50 60	LOW	LOW
	BAY96X1411	208 240	1	7.93 10.56	38.1 44	50 58	50 60	LOW	MED
	BAY96X3411	208 240	3	7.93 10.56	24.2 28	33 38	35 40	LOW	MED
	BAY96X3415	208 240	3	11.54 15.36	36 41.6	45 52	45 60	LOW	MED
A	TRANE HEATER MODEL	SUPPLY VOLTS		KW	HEATER AMPS	MIN. BRANCH CIRCUIT AMPACITY	MAX. OVERCURRENT DEVICE		
	CIRCUIT 1 BAY96X1415 CIRCUIT 2	208 240	1	7.21 9.60	34.7 40	46 53	50 60	LOW	MED
		208 240	1	4.33 5.76	20.8 24	26 30	30 30		
	CIRCUIT 1 BAY96X1419 CIRCUIT 2	208 240	1	7.21 9.60	34.7 40	46 53	50 60	MED	HI *1
		208 240	1	7.20 9.60	34.7 40	43 50	45 50		
	CIRCUIT 1 BAY96X1421 CIRCUIT 2	208 240	1	7.21 9.60	34.7 40	46 53	50 60	MED	HI *1
		208 240	1	8.65 11.52	41.6 48	52 60	60 60		
	CIRCUIT 1 BAY96X1426 CIRCUIT 2	208 240	1	7.21 9.60	34.7 40	NA NA	NA NA	NA	NA
		208 240	1	8.65 11.52	41.6 48	NA NA	NA NA		
	CIRCUIT 3	208 240	1	3.60 4.80	17.3 20	NA NA	NA NA		

NOTE: Heater model number may have additional suffix digits

CAUTION: WHEN HEATER MODELS BAY96X1410A, 1411A, 1414, 1415, 1419, 1421 AND 1426 ARE INSTALLED USE ONLY 240/208 VOLT SUPPLY CIRCUITS WITH 120 VOLTS TO GROUND (NOMINAL).

FOR FIELD CONNECTIONS USE COPPER CONDUCTORS ONLY.

USE ONLY APPROVED COMBINATIONS OF ELECTRIC HEATERS AND UNITS.

MINIMUM INSTALLATION CLEARANCE TO COMBUSTIBLE MATERIALS WHEN ELECTRIC HEATERS ARE INSTALLED: UNIT CABINET-0", PLENUM-1" AND FIRST 3' OF OUTLET DUCT-1". MAXIMUM OUTLET AIR TEMPERATURE WITH ELECTRIC HEATERS 194°F.

NOTICE: IF AIR HANDLER IS USED WITHOUT A FACTORY FURNISHED SUPPLEMENTARY ELECTRIC HEATER, AN ACCESSORY PLATE IS REQUIRED TO COVER THE OPEN HOLE IN THE AIRFLOW SYSTEM.

WARNING [illegible] PUMP INSTALLATIONS, SOME HEATERS ARE [illegible]TIVE. SEE *NOTES BELOW.

[illegible] UPFLOW AND HORIZONTAL