
United States Department of Agriculture
Forest Service
IDAHO
FREMONT COUNTY
(R4) INTERMOUNTAIN REGION
CARIBOU-TARGHEE NATIONAL FOREST
ISLAND PARK RANGER DISTRICT


ISLAND PARK ADMIN SITE
HOUSING ROOF REPLACEMENTS

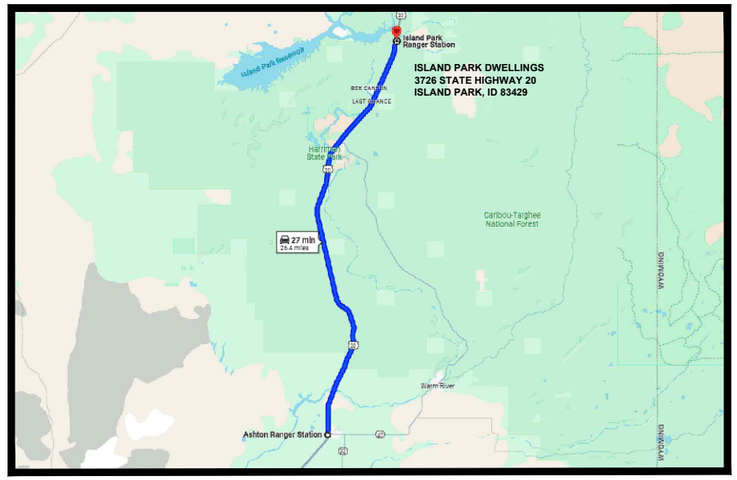


PROJECT LOCATION MAP

TRAVEL DIRECTIONS:

FROM ASHTON, IDAHO, HEAD NORTH ON HIGHWAY 20 FOR ABOUT 26 MILES, TURN RIGHT ONTO OLD CHICK CREEK ROAD, CONTINUE FOR 130 FEET. TURN LEFT ONTO FOREST SERVICE LOOP ROAD 20137. CONTINUE FOR 210 FEET. THE DWELLINGS WILL BE ON THE WEST SIDE OF THE LOOP AND THE DUPLEXES WILL BE ON THE EAST SIDE OF THE LOOP. EXIT THE LOOP, HEADING EAST ON CHICK CREEK ROAD FOR 0.1 MILES. THE BUNKHOUSES WILL BE ON YOUR LEFT, LOCATED ON THE SECOND LOOP TO THE EAST ON FOREST SERVICE ROAD 20137. 3726 US-20, ISLAND PARK, ID 83429 LATITUDE 44.42156137995545° NORTH, LONGITUDE -111.37351763590456° WEST.

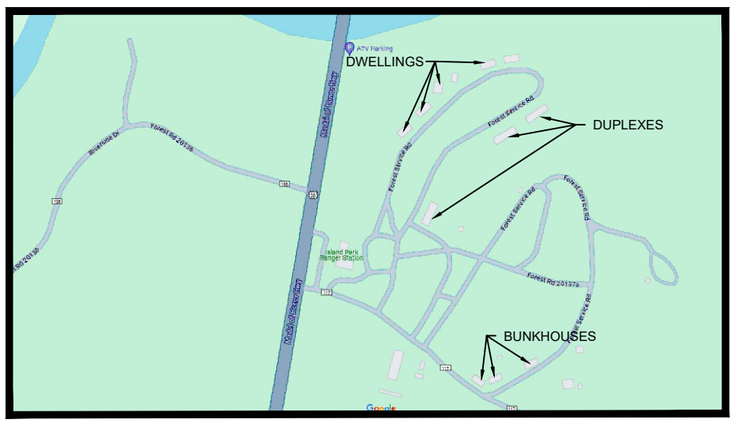

PROJECT LOCATION MAP

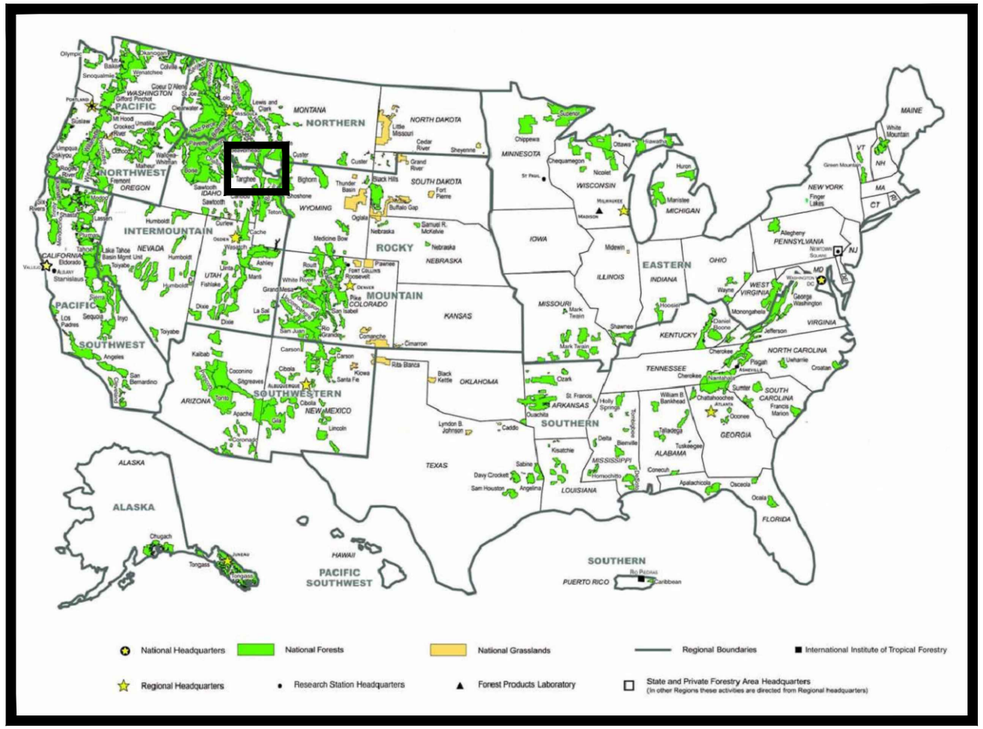

FOREST LOCATION MAP

INDEX OF SHEETS

SHEET	SHEET TITLE
G-01	COVERSHEET
G-2	Project Description & Schedule of Items
C-1	Dwelling 1103
C-2	Dwelling 1147
C-3	Dwelling 1158
C-4	Dwelling 1159
C-5	Duplex 1155 A&B
C-6	Duplex 1156 A&B
C-7	Duplex 1157 A&B
C-8	1150 Bunkhouse #1-2
C-9	1151 Bunkhouse #5-6
C-10	1152 Bunkhouse #3-4
C-11	Roof Plan and Section Details
C-12	Roof Penetrations
C-13	Ridge and Valley Details
C-14	Soffit & Fascia Details

APPROVED:

STEVEN JENKINS — Digitally signed by STEVEN JENKINS Date: 2026.01.30 07:22:34 -07'00'
FOREST ENGINEER — DATE

JESSICA TAYLOR — Digitally signed by JESSICA TAYLOR Date: 2026.02.02 07:23:10 -07'00'
DISTRICT RANGER — DATE

KIMBERLY PIERSON — Digitally signed by KIMBERLY PIERSON Date: 2026.02.02 08:55:16 -07'00'
FOREST SUPERVISOR — DATE

1/29/26 15:10 NINANDERSON C:\USERS\NINANDERSON\BOX01. NINI.ANDERSON WORKSPACE\ENGINEERING DESIGN\IP HOUSING REROOFING\2026 FILES\IP ROOFS.DWG;

PROJECT DESCRIPTION

THE PROJECT WILL CONSIST OF REROOFING 10 HOUSING UNITS AT THE ISLAND PARK ADMINISTRATIVE SITE:

- TEAR OFF AND DISPOSE OF EXISTING METAL ROOFING DOWN TO THE SHEATHING.
- PROVIDE AND INSTALL ICE AND WATER SHIELD OVER THE ENTIRE ROOF.
- PROVIDE AND INSTALL SLIP SHEET BETWEEN METAL ROOFING AND UNDERLAYMENT.
- REPLACE EXISTING ROOFING WITH NEW FLAT PROFILE 1–3/4" STANDING SEAM 24 GAUGE METAL ROOFING..
- PROVIDE AND INSTALL MATCHING DRIP EDGE, FLASHING, AND TRIM.
- PROVIDE AND INSTALL ROOF JACK BOOT AROUND ALL ROOF PENETRATIONS.
- PROVIDE AND INSTALL NEW VENTED SOFFIT AND FASCIA TO MATCH.

QUANTITIES ASSOCIATED WITH THESE OPTIONS ARE IDENTIFIED IN THE SCHEDULE OF ITEMS.

PROJECT NOTES

- Depicted Measurements Are Approximations.
- Contractor to field verify measurements prior to bidding.

Schedule of Items

Island Park Dwellings Reroofing (10 Units)

ITEM NUMBER	DESCRIPTION	METHOD OF MEASUREMENT	UNIT	QUANTITY	UNIT PRICE	TOTAL
011900	Mobilization	LSQ	Lump Sum	1		
070150.19	Selective Demolition of Existing Roofing (Metal Roofing)	DQ	SF	25,582		
074113-1	Self-Adhering Rubberized Asphalt Felt-40 Mil thick	AQ	SQ	256		
074113-2	Flat Profile 1-3/4" Standing Seam Metal Roof Panels, 10" Wide, Standard Finish, 24 gauge	AQ	SF	25,582		
074113-3	Ridge Vents (Match Roof Panels)	AQ	LF	774		
074113-4	Vent Caps (Match Ridge Vent)	AQ	EA	29		
074293	Remove and Replace Soffit with Vented Aluminum Soffit	AQ	LF	2,144		
076200-1	Fascia (Match Soffit)	AQ	SF	1,072		
076200-2	Flashing & Trim (Match Roof Panels)	AQ	LF	2,144		
61000	5/8" Sheathing, Missing and Damaged	AQ	SF	6,598		
	Total					

United States Department of Agriculture
Forest Service

R4
Intermountain Region

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		12/13/2024
3		12/02/2024
2		09/25/2024
1		04/16/2024

PROJECT NAME

ISLAND PARK ADMIN SITE HOUSING ROOF REPLACEMENTS

Caribou-Targhee National Forest

Ashton/Island Park District


DRAWING TITLE

Project Description Schedule of Items

DATE 04/16/2024	ARCHIVE NO.
DESIGNER N. Anderson	DRAWING SHEET NO. G-2
DRAWN N. Anderson	
CHECKED S. Jenkins	
PROJECT NO.	SHEET 02 OF 16

1/29/26 15:10 NINIANDERSON C:\USERS\NINIANDERSON\BOX\01. NINI.ANDERSON WORKSPACE\ENGINEERING DESIGN\IP HOUSING REROOFING\2026 FILES\IP ROOFS.DWG;


Dwelling1103

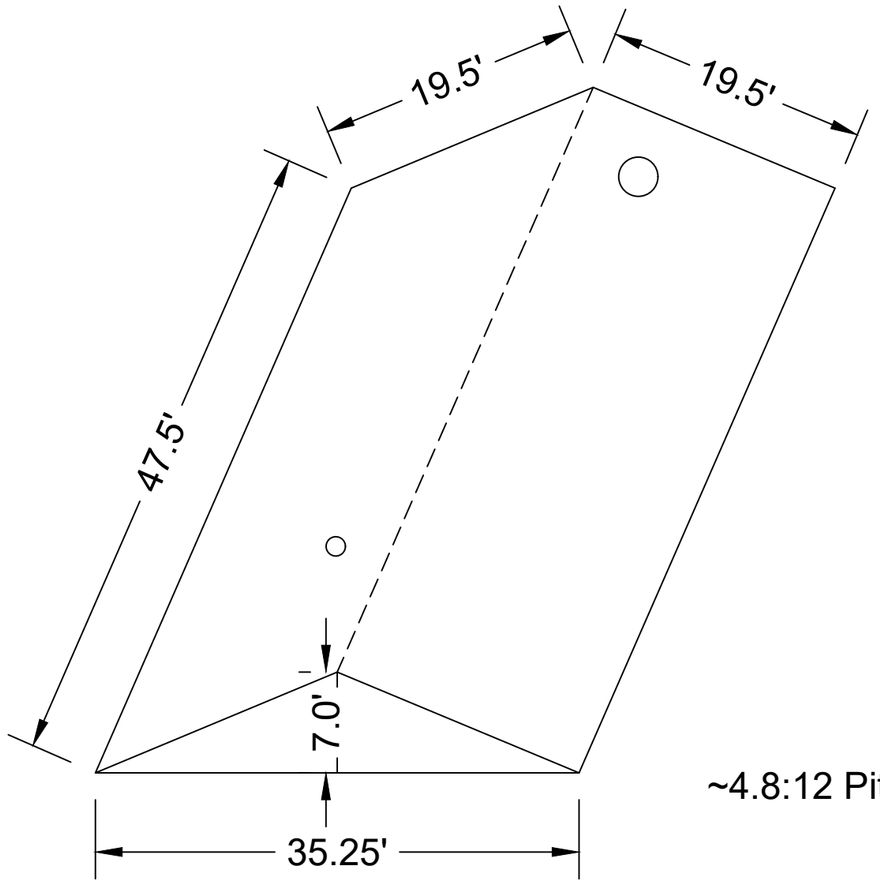


~4.8:12 Pitch





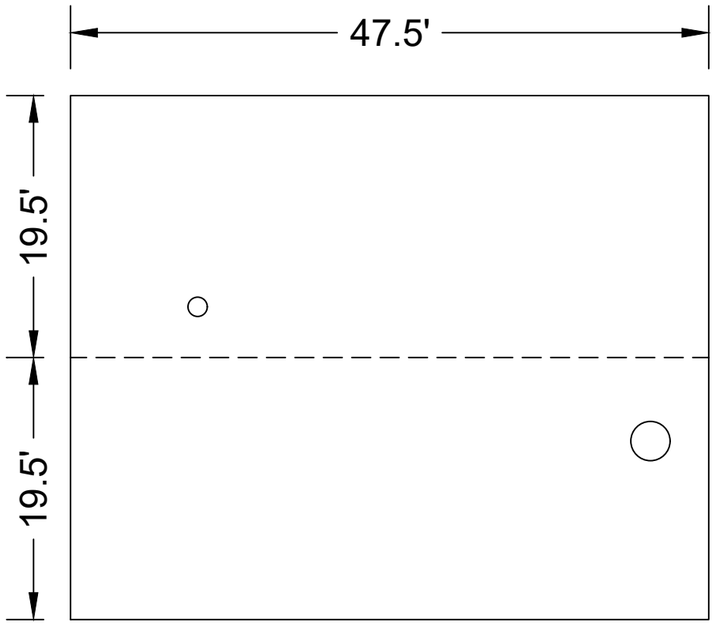

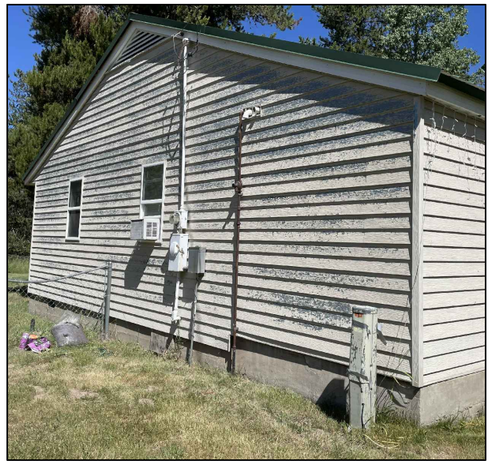





1/29/26 15:10 NINAANDERSON C:\USERS\NINAANDERSON\BOX\01. NINA.ANDERSON WORKSPACE\ENGINEERING DESIGN\IP HOUSING REROOFING\2026 FILES\IP ROOFS.DWG;

United States Department of Agriculture
Forest Service

R4
Intermountain Region

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		12/13/2024
3		12/02/2024
2		09/25/2024
1		04/16/2024

PROJECT NAME

ISLAND PARK ADMIN SITE HOUSING ROOF REPLACEMENTS

Caribou-Targhee National Forest


Ashton/Island Park District

DRAWING TITLE

Dwelling 1103

DATE 04/16/2024	ARCHIVE NO.
DESIGNER N. Anderson	DRAWING SHEET NO. C-1
DRAWN N. Anderson	
CHECKED S. Jenkins	
PROJECT NO.	SHEET 03 OF 16

Dwelling 1147

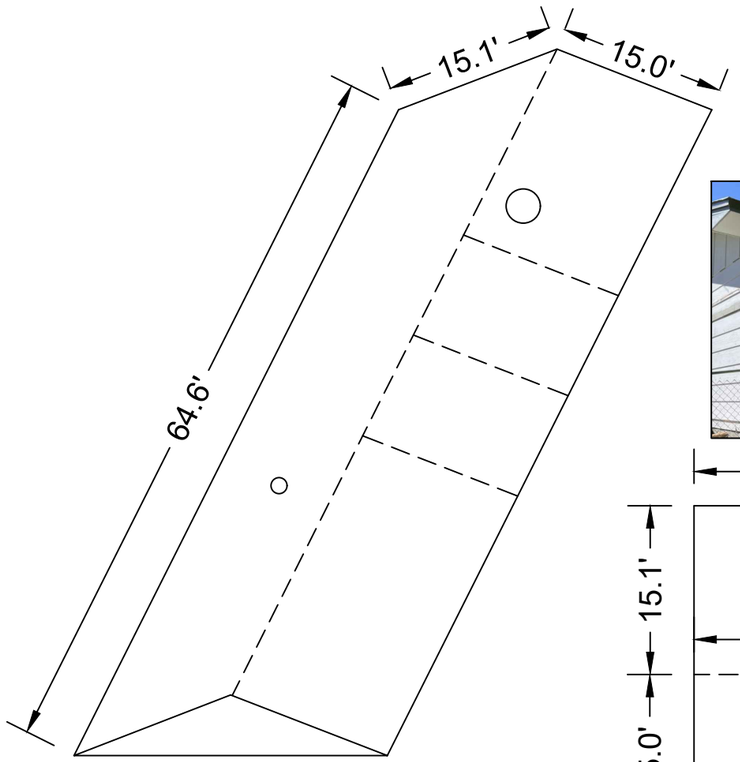


~4:12 Pitch










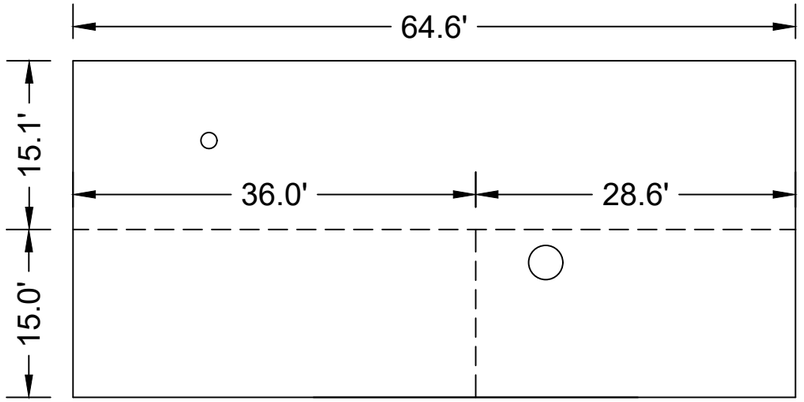

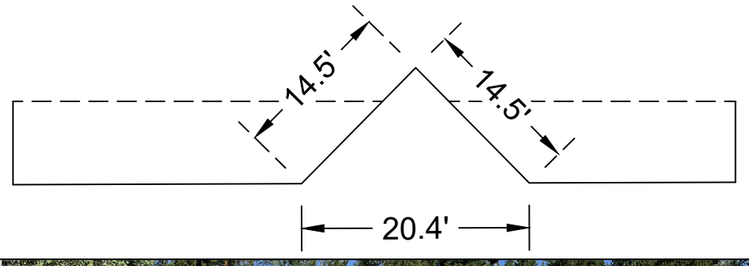



United States Department of Agriculture
Forest Service

R4
Intermountain Region

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		12/13/2024
3		12/02/2024
2		09/25/2024
1		04/16/2024

PROJECT NAME

ISLAND PARK ADMIN SITE HOUSING ROOF REPLACEMENTS

Caribou-Targhee National Forest

Ashton/Island Park District


DRAWING TITLE

Dwelling 1147

DATE 04/16/2024	ARCHIVE NO.
DESIGNER N. Anderson	DRAWING SHEET NO. C-2
DRAWN N. Anderson	
CHECKED S. Jenkins	
PROJECT NO.	SHEET 04 OF 16


1/29/26 15:10 NINIANDERSON C:\USERS\NINIANDERSON\BOX\01. NINI.ANDERSON WORKSPACE\ENGINEERING DESIGN\IP HOUSING REROOFING\2026 FILES\IP ROOFS.DWG;

Dwelling 1158

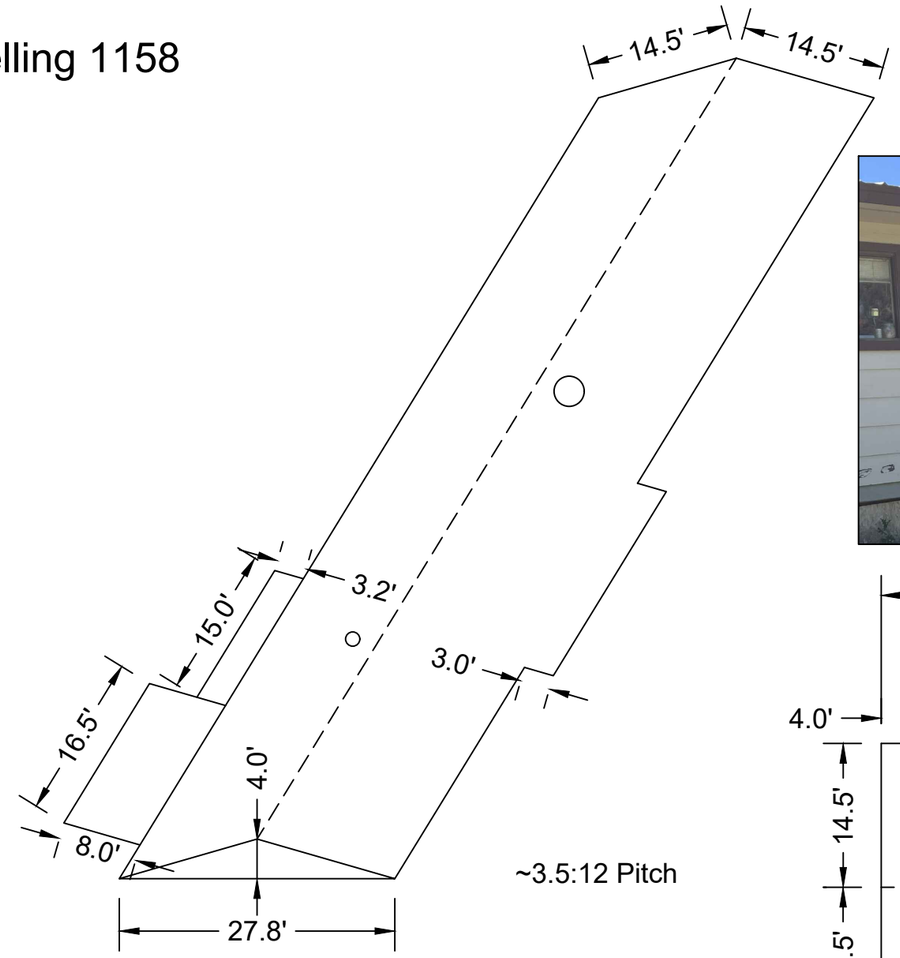

~3.5:12 Pitch



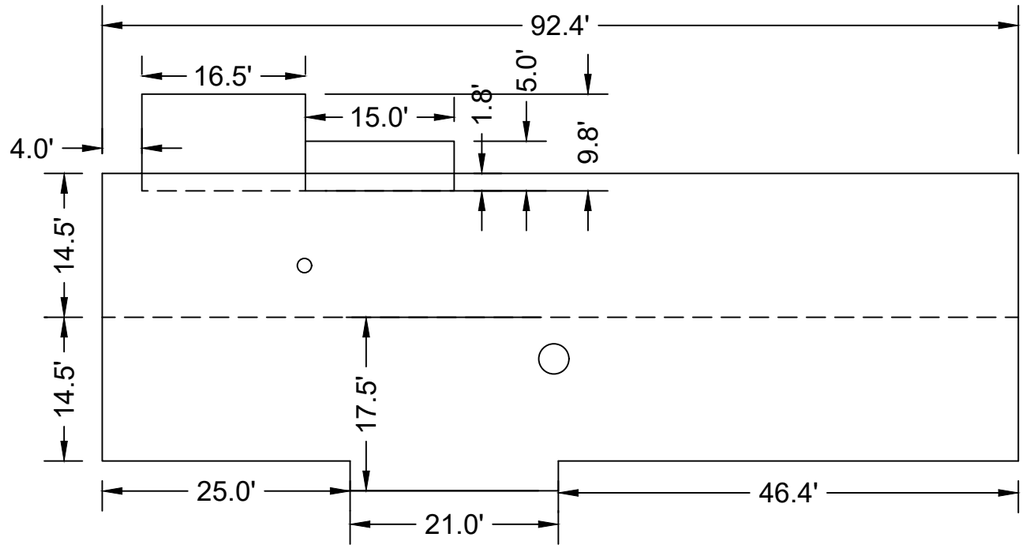





1/29/26 15:10 NINIANDERSON C:\USERS\NINIANDERSON\BOX\01. NINI.ANDERSON WORKSPACE\ENGINEERING DESIGN\IP HOUSING REROOFING\2026 FILES\IP ROOFS.DWG;

United States Department of Agriculture
Forest Service

R4
Intermountain Region

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		12/13/2024
3		12/02/2024
2		09/25/2024
1		04/16/2024

PROJECT NAME

ISLAND PARK ADMIN SITE HOUSING ROOF REPLACEMENTS

Caribou-Targhee National Forest


Ashton/Island Park District

DRAWING TITLE

Dwelling 1158


DATE 04/16/2024	ARCHIVE NO.
DESIGNER N. Anderson	DRAWING SHEET NO. C-3
DRAWN N. Anderson	
CHECKED S. Jenkins	
PROJECT NO.	SHEET 05 OF 16

Dwelling 1159

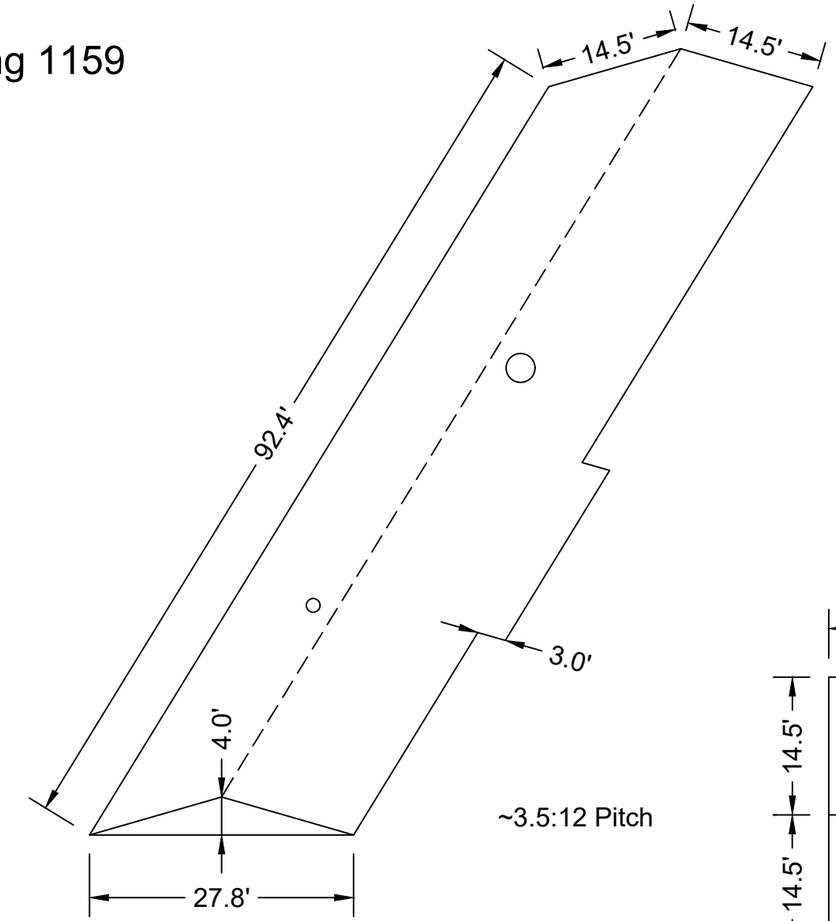

~3.5:12 Pitch



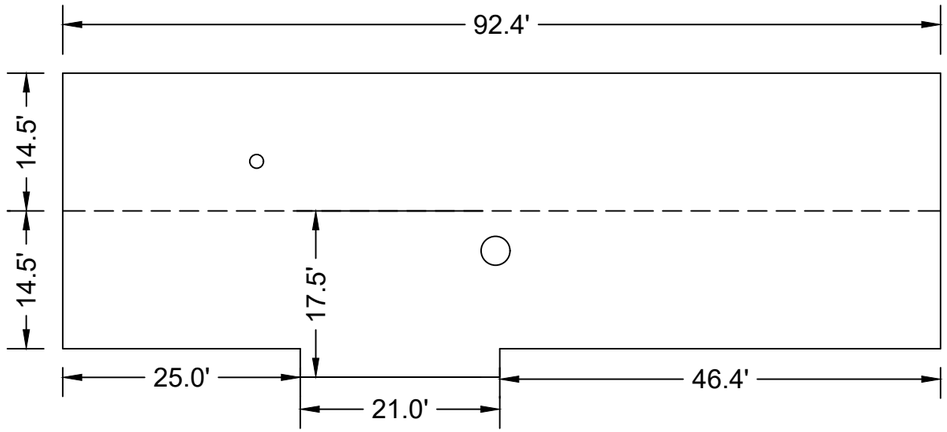





United States Department of Agriculture
Forest Service

R4
Intermountain Region

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		12/13/2024
3		12/02/2024
2		09/25/2024
1		04/16/2024

PROJECT NAME

ISLAND PARK ADMIN SITE HOUSING ROOF REPLACEMENTS

Caribou-Targhee National Forest

Ashton/Island Park District

DRAWING TITLE

Dwelling 1159

DATE 04/16/2024	ARCHIVE NO.
DESIGNER N. Anderson	DRAWING SHEET NO. C-4
DRAWN N. Anderson	
CHECKED S. Jenkins	
PROJECT NO.	SHEET 06 OF 16

1/29/26 15:10 NINIANDERSON C:\USERS\NINIANDERSON\BOX\01. NINI.ANDERSON WORKSPACE\ENGINEERING DESIGN\IP HOUSING REROOF\NO2026 FILES\IP ROOFS.DWG;


Duplex 1155 A&B




~3.1:12 Pitch






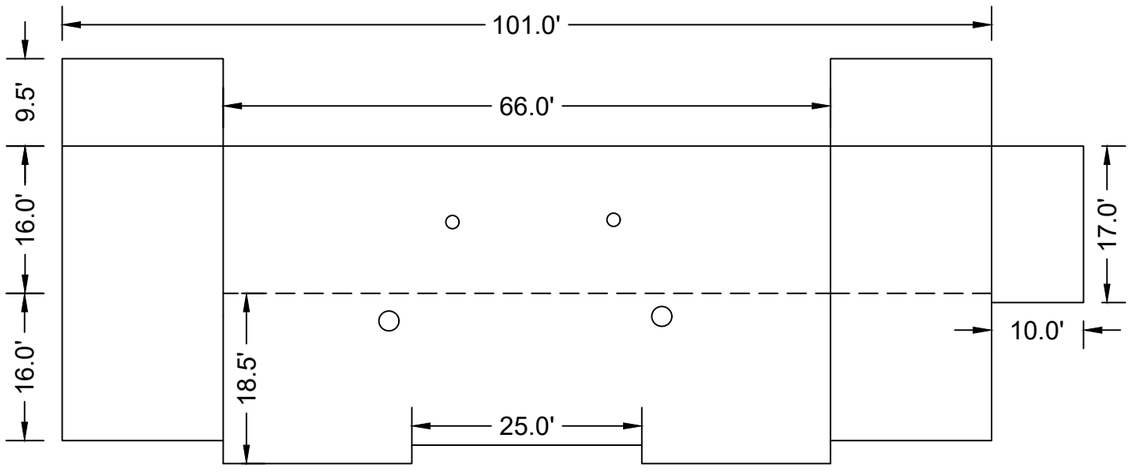

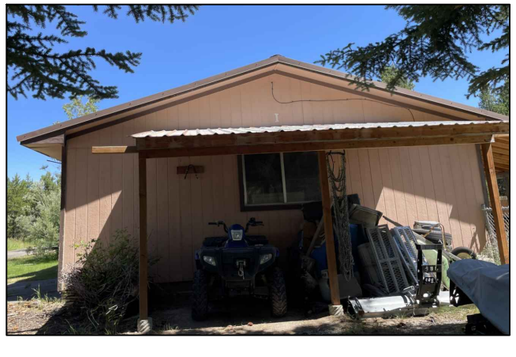



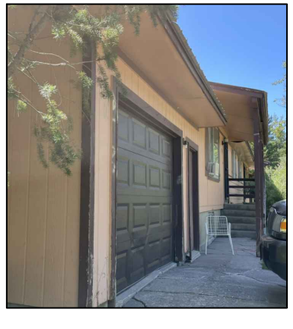

USDA FOREST SERVICE

United States Department of Agriculture
Forest Service

R4
Intermountain Region

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		12/13/2024
3		12/02/2024
2		09/25/2024
1		04/16/2024

PROJECT NAME

ISLAND PARK ADMIN SITE HOUSING ROOF REPLACEMENTS

Caribou-Targhee National Forest

Ashton/Island Park District


DRAWING TITLE

Duplex 1155 A&B

DATE 04/16/2024	ARCHIVE NO.
DESIGNER N. Anderson	DRAWING SHEET NO. C-5
DRAWN N. Anderson	
CHECKED S. Jenkins	
PROJECT NO.	SHEET 07 OF 16


1/29/26 15:10 NINIANDERSON C:\USERS\NINIANDERSON\BOX\01. NINI.ANDERSON WORKSPACE\ENGINEERING DESIGN\IP HOUSING REROOFING\2026 FILES\IP ROOFS.DWG;

Duplex 1156 A&B

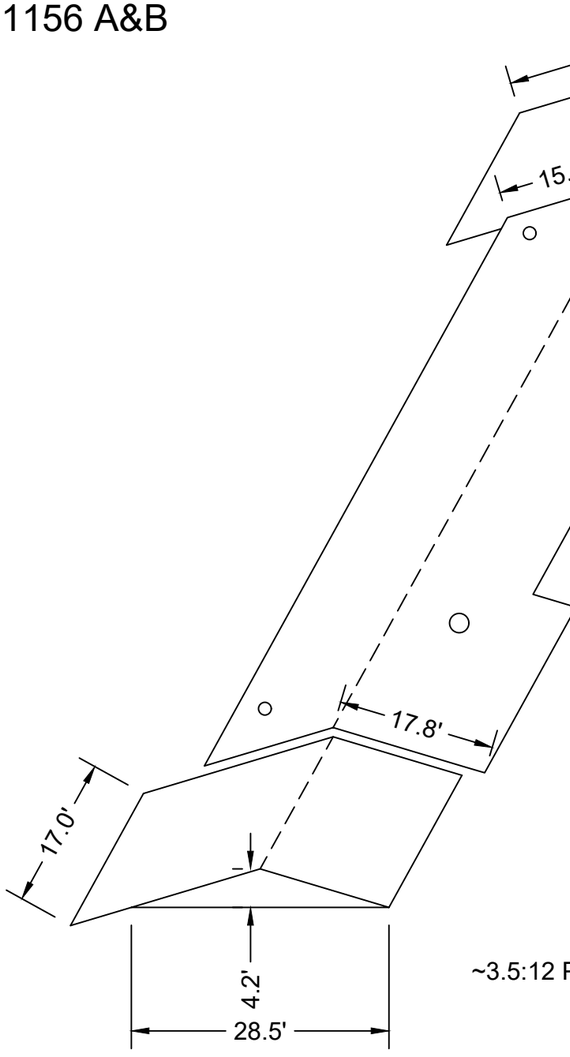


~3.5:12 Pitch



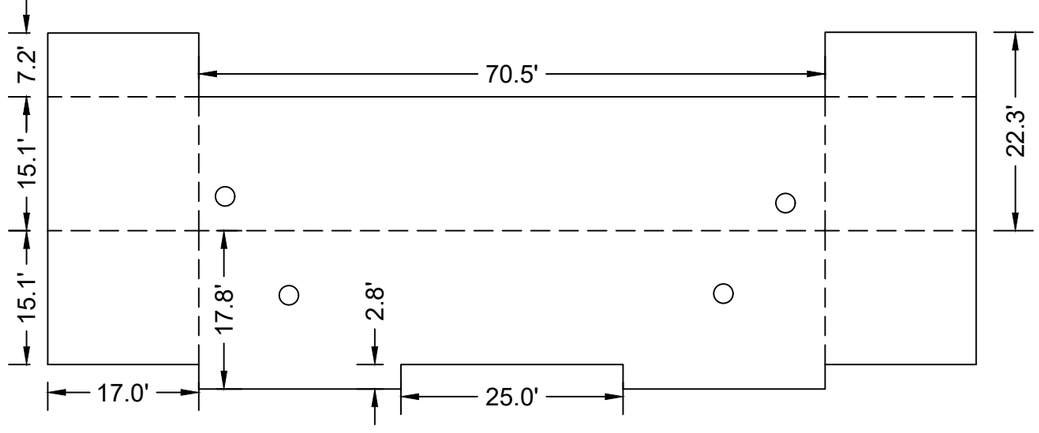



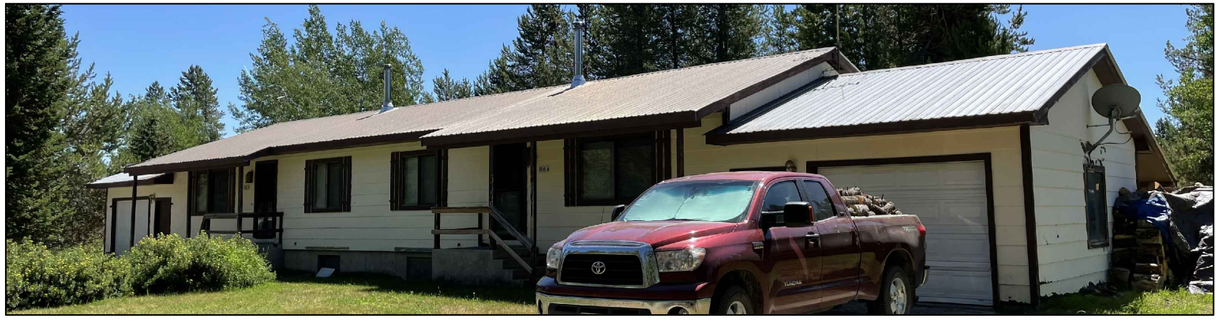

1/29/26 15:10 NINIANDERSON C:\USERS\NINIANDERSON\BOX\01. NINI.ANDERSON WORKSPACE\ENGINEERING DESIGN\IP HOUSING REROOFING\2026 FILES\IP ROOFS.DWG;

United States Department of Agriculture
Forest Service

R4
Intermountain Region

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		12/13/2024
3		12/02/2024
2		09/25/2024
1		04/16/2024

PROJECT NAME

ISLAND PARK ADMIN SITE HOUSING ROOF REPLACEMENTS

Caribou-Targhee National Forest


Ashton/Island Park District

DRAWING TITLE

Duplex 1156 A&B


DATE 04/16/2024	ARCHIVE NO.
DESIGNER N. Anderson	DRAWING SHEET NO. C-6
DRAWN N. Anderson	
CHECKED S. Jenkins	
PROJECT NO.	SHEET 08 OF 16

Duplex 1157 A&B

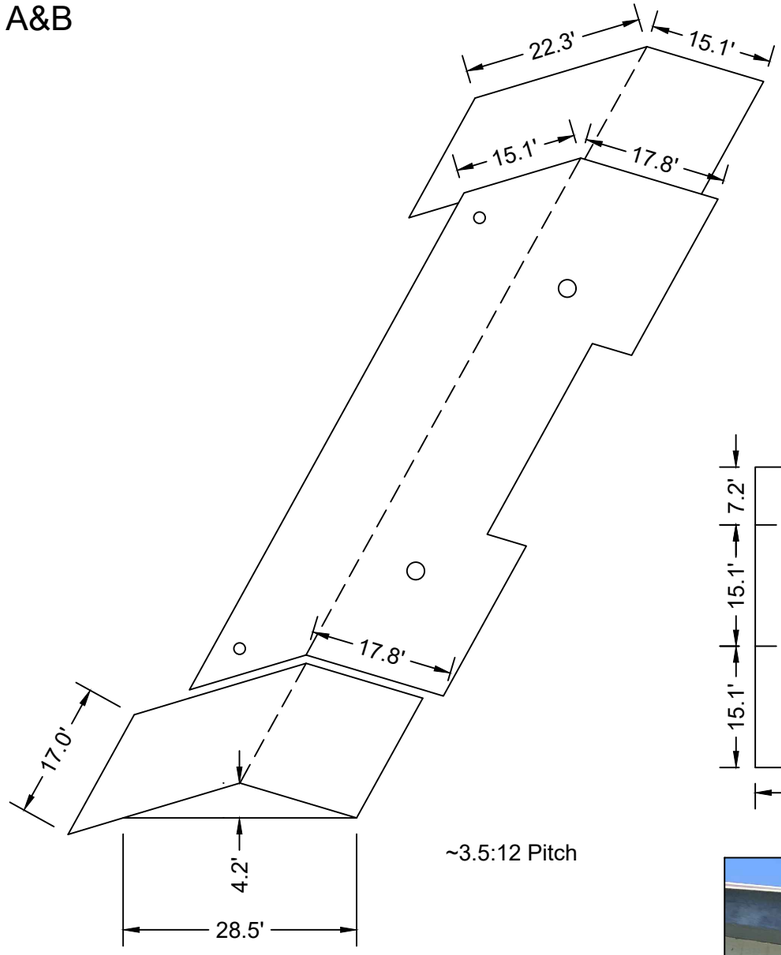

~3.5:12 Pitch



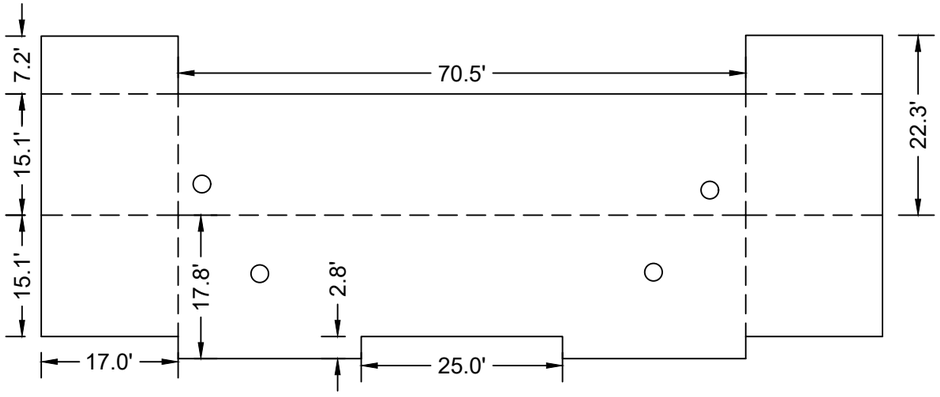





1/29/26 15:10 NINAANDERSON C:\USERS\NINAANDERSON\BOX\01. NINI.ANDERSON WORKSPACE\ENGINEERING DESIGN\IP HOUSING REROOFING\2026 FILES\IP ROOFS.DWG;

United States Department of Agriculture
Forest Service

R4
Intermountain Region

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		12/13/2024
3		12/02/2024
2		09/25/2024
1		04/16/2024

PROJECT NAME

ISLAND PARK ADMIN SITE HOUSING ROOF REPLACEMENTS

Caribou-Targhee National Forest


Ashton/Island Park District

DRAWING TITLE

Duplex 1157 A&B


DATE 04/16/2024	ARCHIVE NO.
DESIGNER N. Anderson	DRAWING SHEET NO. C-7
DRAWN N. Anderson	
CHECKED S. Jenkins	
PROJECT NO.	SHEET 09 OF 16

1150 Bunkhouse #1-2

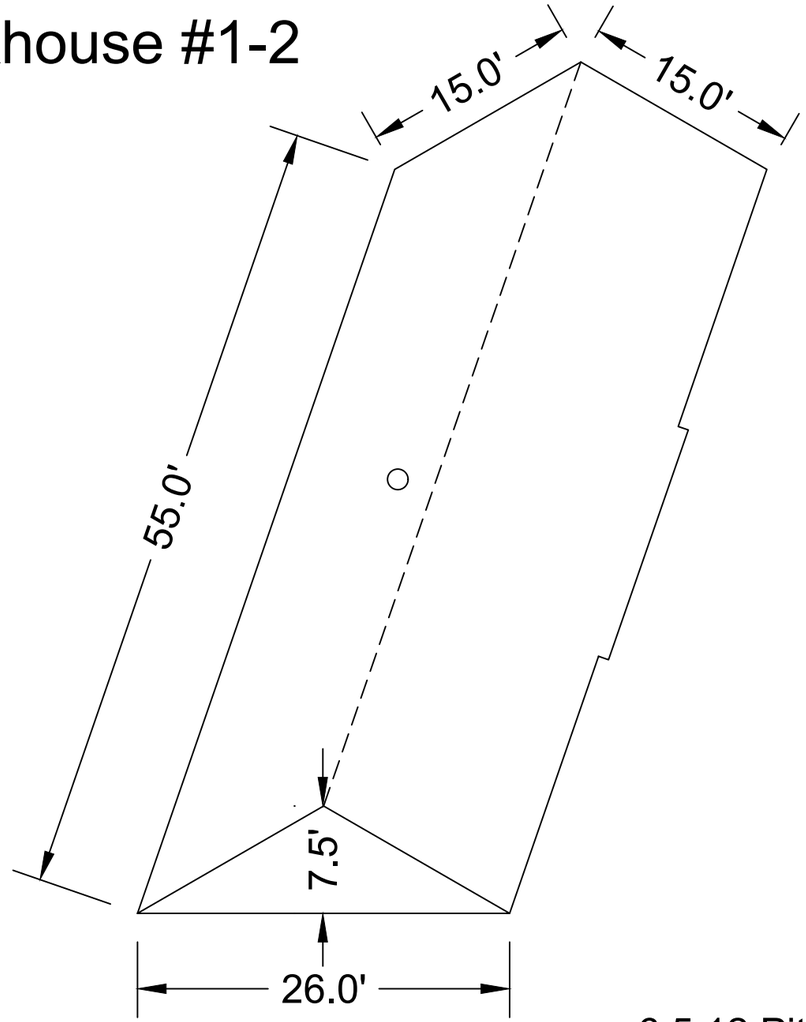


~6.5:12 Pitch



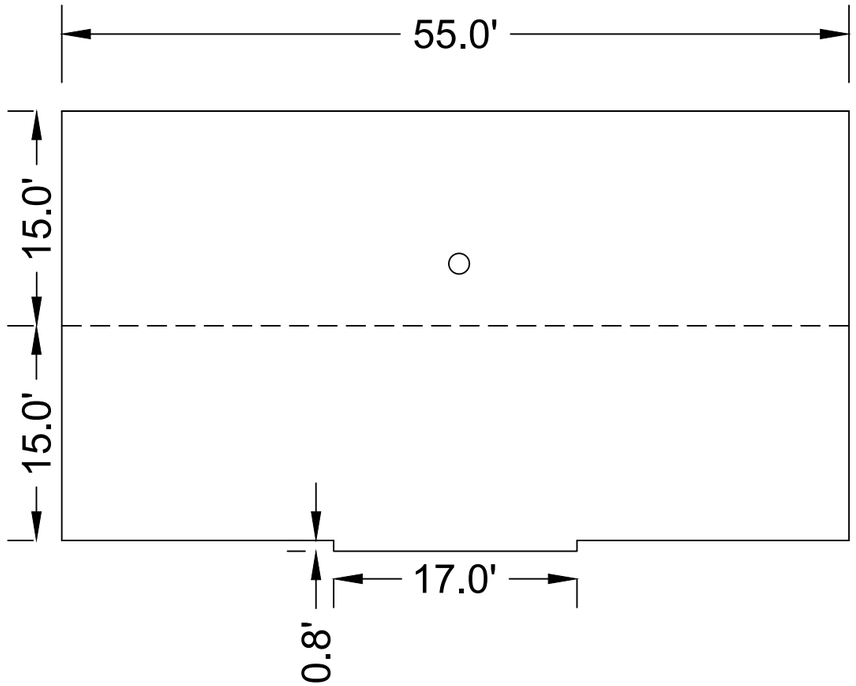



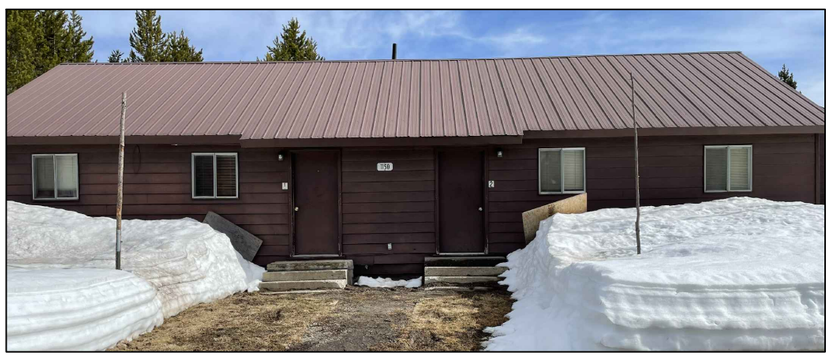

1/29/26 15:10 NINANDERSON C:\USERS\NINANDERSON\BOX\01. NIN.ANDERSON WORKSPACE\ENGINEERING DESIGN\IP HOUSING REROOFING\2026 FILES\IP ROOFS.DWG;

United States Department of Agriculture
Forest Service

R4
Intermountain Region

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		12/13/2024
3		12/02/2024
2		09/25/2024
1		04/16/2024

PROJECT NAME

ISLAND PARK ADMIN SITE HOUSING ROOF REPLACEMENTS

Caribou-Targhee National Forest


Ashton/Island Park District

DRAWING TITLE


1150 Bunkhouse #1-2

DATE 04/16/2024	ARCHIVE NO.
DESIGNER N. Anderson	DRAWING SHEET NO. C-8
DRAWN N. Anderson	
CHECKED S. Jenkins	
PROJECT NO.	SHEET 10 OF 16

1151 Bunkhouse #5-6

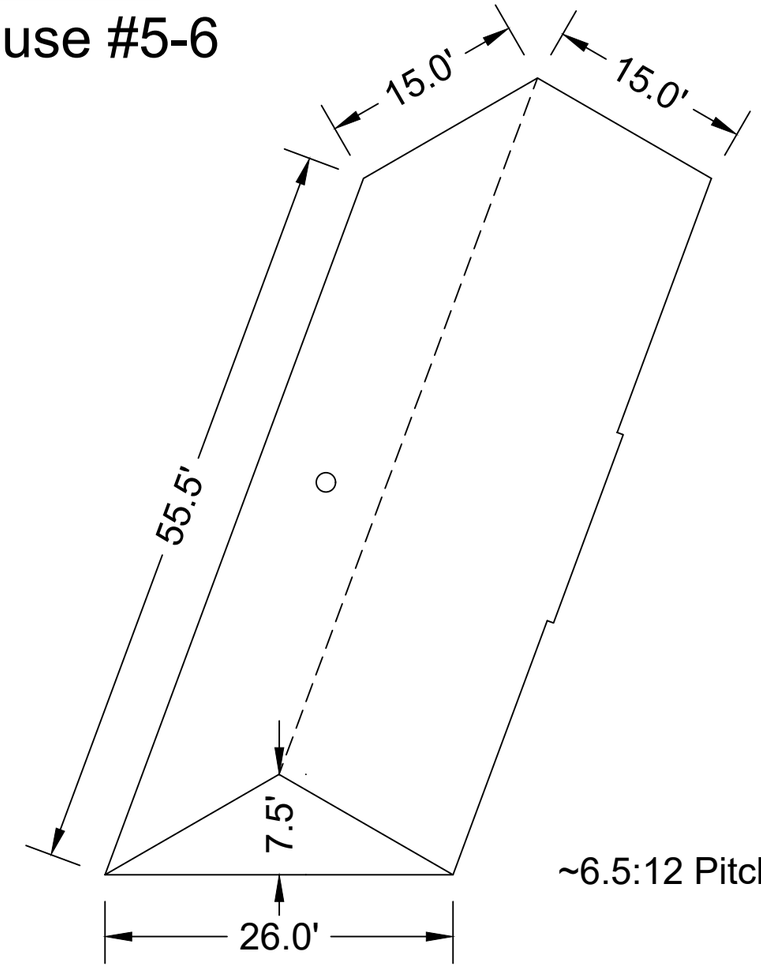



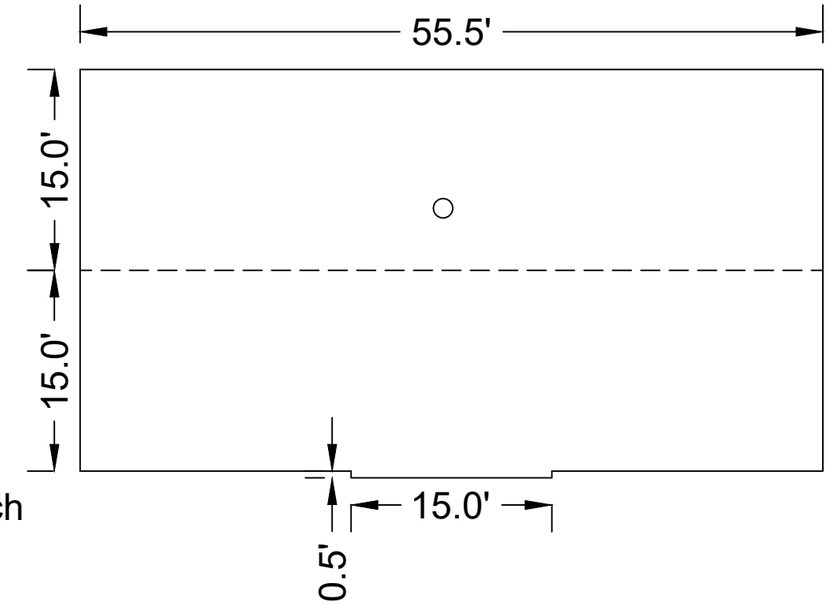

~6.5:12 Pitch







United States Department of Agriculture
Forest Service

R4
Intermountain Region

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		12/13/2024
3		12/02/2024
2		09/25/2024
1		04/16/2024

PROJECT NAME

ISLAND PARK ADMIN SITE HOUSING ROOF REPLACEMENTS

Caribou-Targhee National Forest

Ashton/Island Park District


DRAWING TITLE

1151 Bunkhouse #5-6

DATE 04/16/2024	ARCHIVE NO.
DESIGNER N. Anderson	DRAWING SHEET NO. C-9
DRAWN N. Anderson	
CHECKED S. Jenkins	
PROJECT NO.	SHEET 11 OF 16


1/29/26 15:10 NINANDERSON C:\USERS\NINANDERSON\BOX\01. NIN.ANDERSON WORKSPACE\ENGINEERING DESIGN\IP HOUSING REROOFING\2026 FILES\IP ROOFS.DWG;

1152 Bunkhouse #3-4

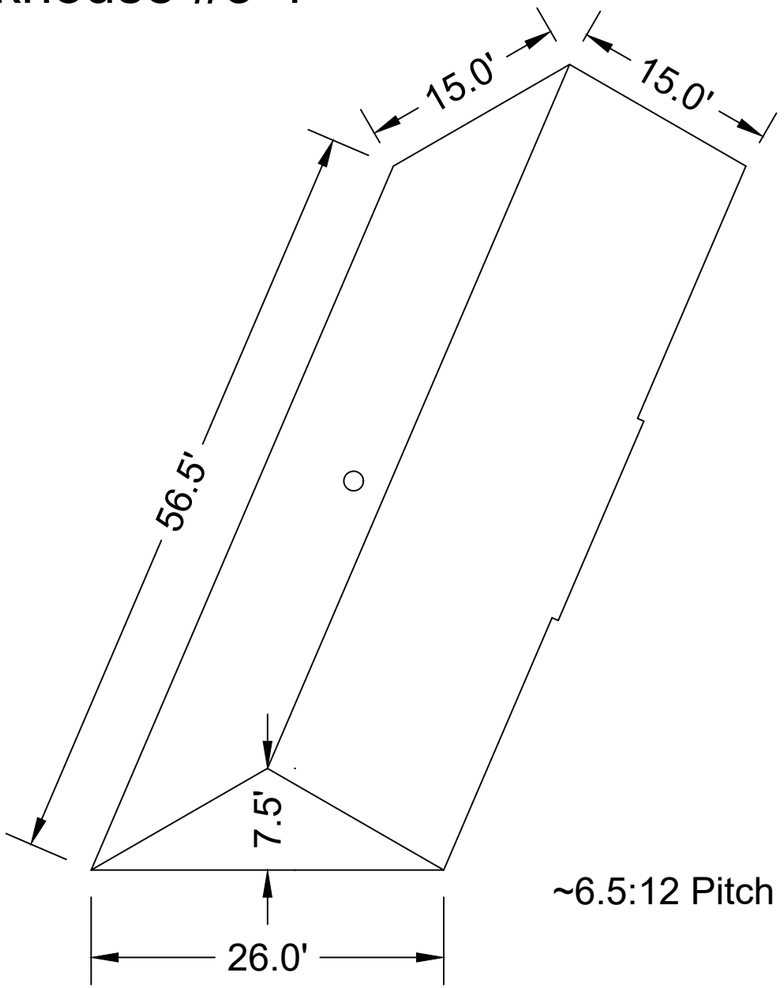


~6.5:12 Pitch



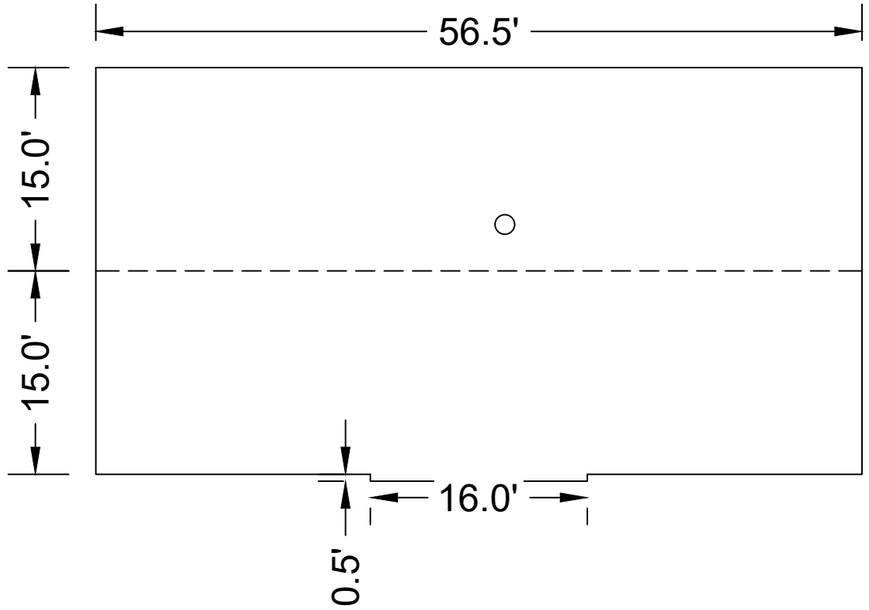



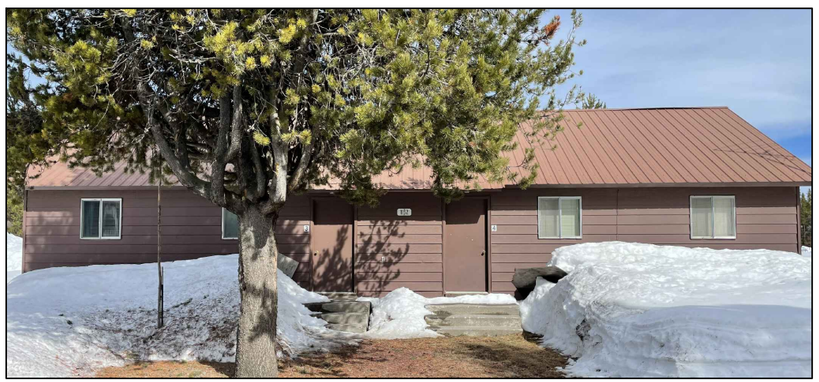

1/29/26 15:10 NINANDERSON C:\USERS\NINANDERSON\BOX\01. NIN.ANDERSON WORKSPACE\ENGINEERING DESIGN\IP HOUSING REROOFING\2026 FILES\IP ROOFS.DWG;

United States Department of Agriculture
Forest Service

R4
Intermountain Region

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		12/13/2024
3		12/02/2024
2		09/25/2024
1		04/16/2024

PROJECT NAME

ISLAND PARK ADMIN SITE HOUSING ROOF REPLACEMENTS


Caribou-Targhee National Forest

Ashton/Island Park District

DRAWING TITLE

1152 Bunkhouse #3-4

DATE 04/16/2024	ARCHIVE NO.
DESIGNER N. Anderson	DRAWING SHEET NO. C-10
DRAWN N. Anderson	
CHECKED S. Jenkins	
PROJECT NO.	SHEET 12 OF 16

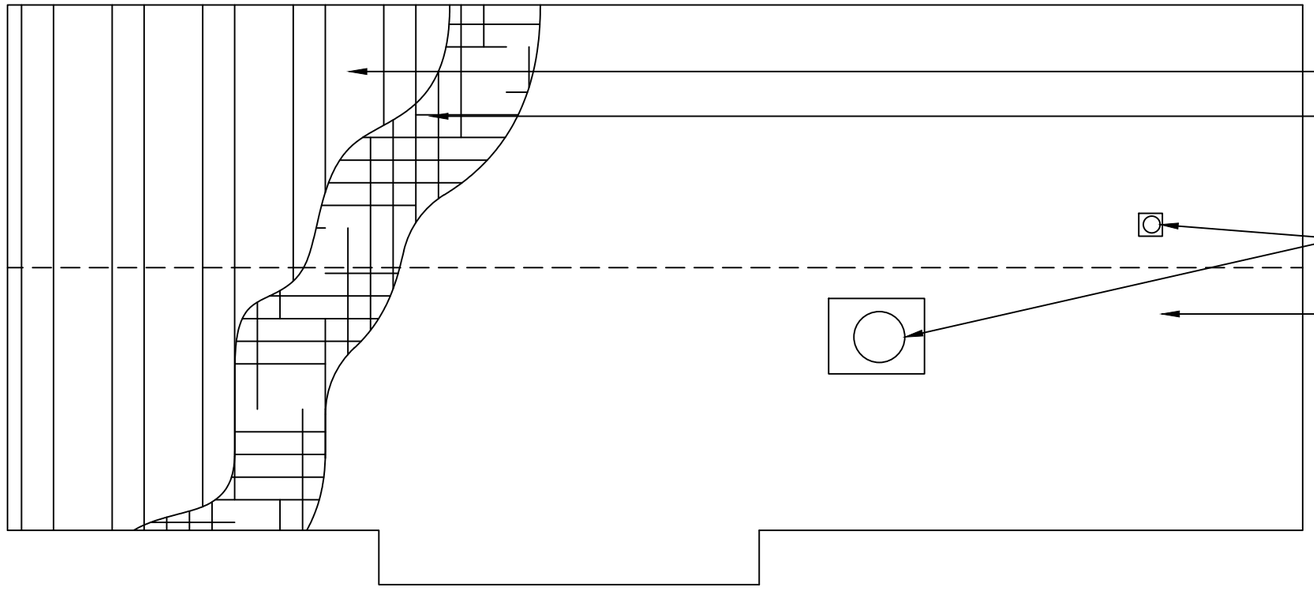

REPLACE METAL ROOOFING.

INSTALL SELF ADHERING MEMBRANE MATERIAL COMPLETELY COVERING ROOF SHEATHING.

INSTALL ROOF JACKS AT ROOF PENETRATIONS (See Sheet C-12)


EVALUATE EXISTING SHEATHING AND REPLACE AS NECESSARY/REQUIRED BY CONTRACING OFFICER (CO) WITH 5/8" EXTERIOR GRADE PLYWOOD NAILED WITH w/ 8D 6" OC EDGE, 12" IN FIELD.

PLAN VIEW

NOT TO SCALE

TYPICAL ROOF DETAIL

NOT TO SCALE

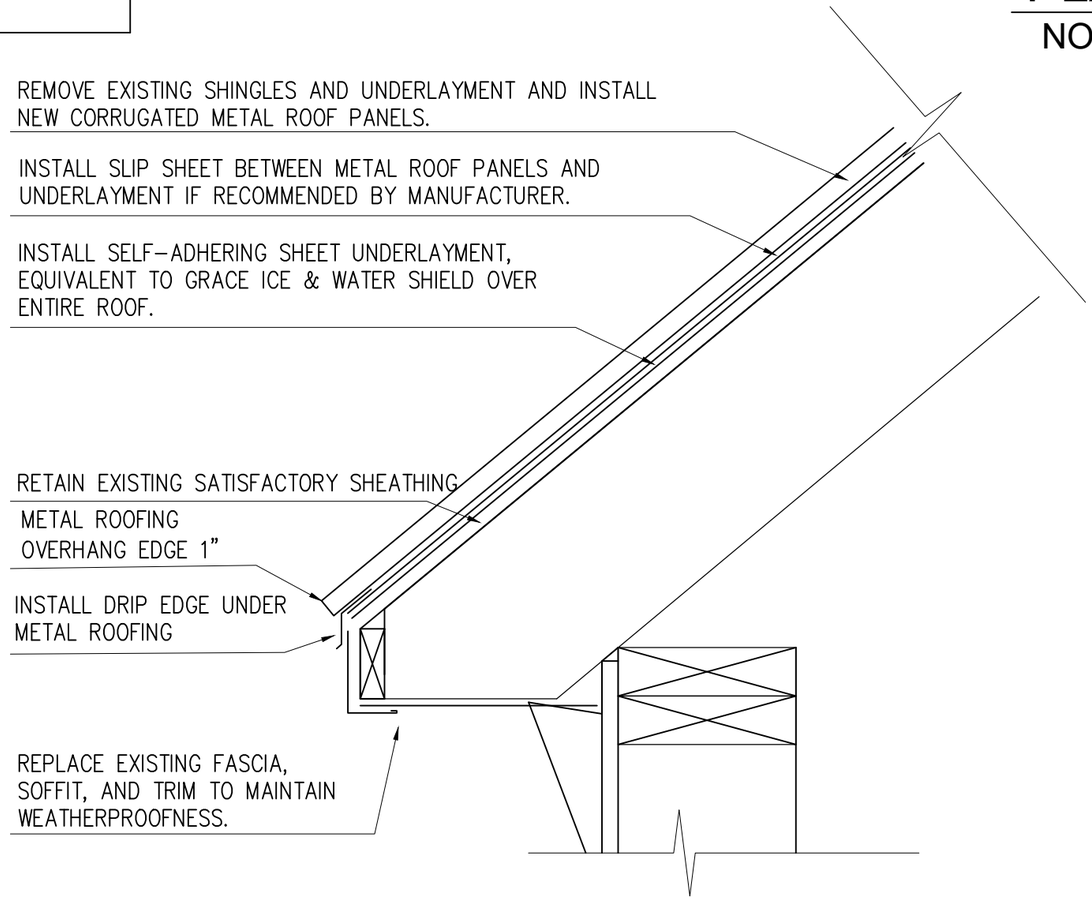

REMOVE EXISTING SHINGLES AND UNDERLAYMENT AND INSTALL NEW CORRUGATED METAL ROOF PANELS.

INSTALL SLIP SHEET BETWEEN METAL ROOF PANELS AND UNDERLAYMENT IF RECOMMENDED BY MANUFACTURER.

INSTALL SELF–ADHERING SHEET UNDERLAYMENT, EQUIVALENT TO GRACE ICE & WATER SHIELD OVER ENTIRE ROOF.

RETAIN EXISTING SATISFACTORY SHEATHING

METAL ROOFING OVERHANG EDGE 1”

INSTALL DRIP EDGE UNDER METAL ROOFING

REPLACE EXISTING FASCIA, SOFFIT, AND TRIM TO MAINTAIN WEATHERPROOFNESS.

United States Department of Agriculture
Forest Service

R4
Intermountain Region

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		12/13/2024
3		12/02/2024
2		09/25/2024
1		04/16/2024

PROJECT NAME

ISLAND PARK ADMIN SITE HOUSING ROOF REPLACEMENTS

Caribou-Targhee National Forest


Ashton/Island Park District

DRAWING TITLE

Roof Plan and Section Details

DATE 04/16/2024	ARCHIVE NO.
DESIGNER N. Anderson	DRAWING SHEET NO. C-11
DRAWN N. Anderson	
CHECKED S. Jenkins	
PROJECT NO.	SHEET 13 OF 16

1/29/26 15:10 NINANDERSON C:\USERS\NINANDERSON\BOX\01. NIN.ANDERSON WORKSPACE\ENGINEERING DESIGN\IP HOUSING REROOFING\2026 FILES\IP ROOFS.DWG;

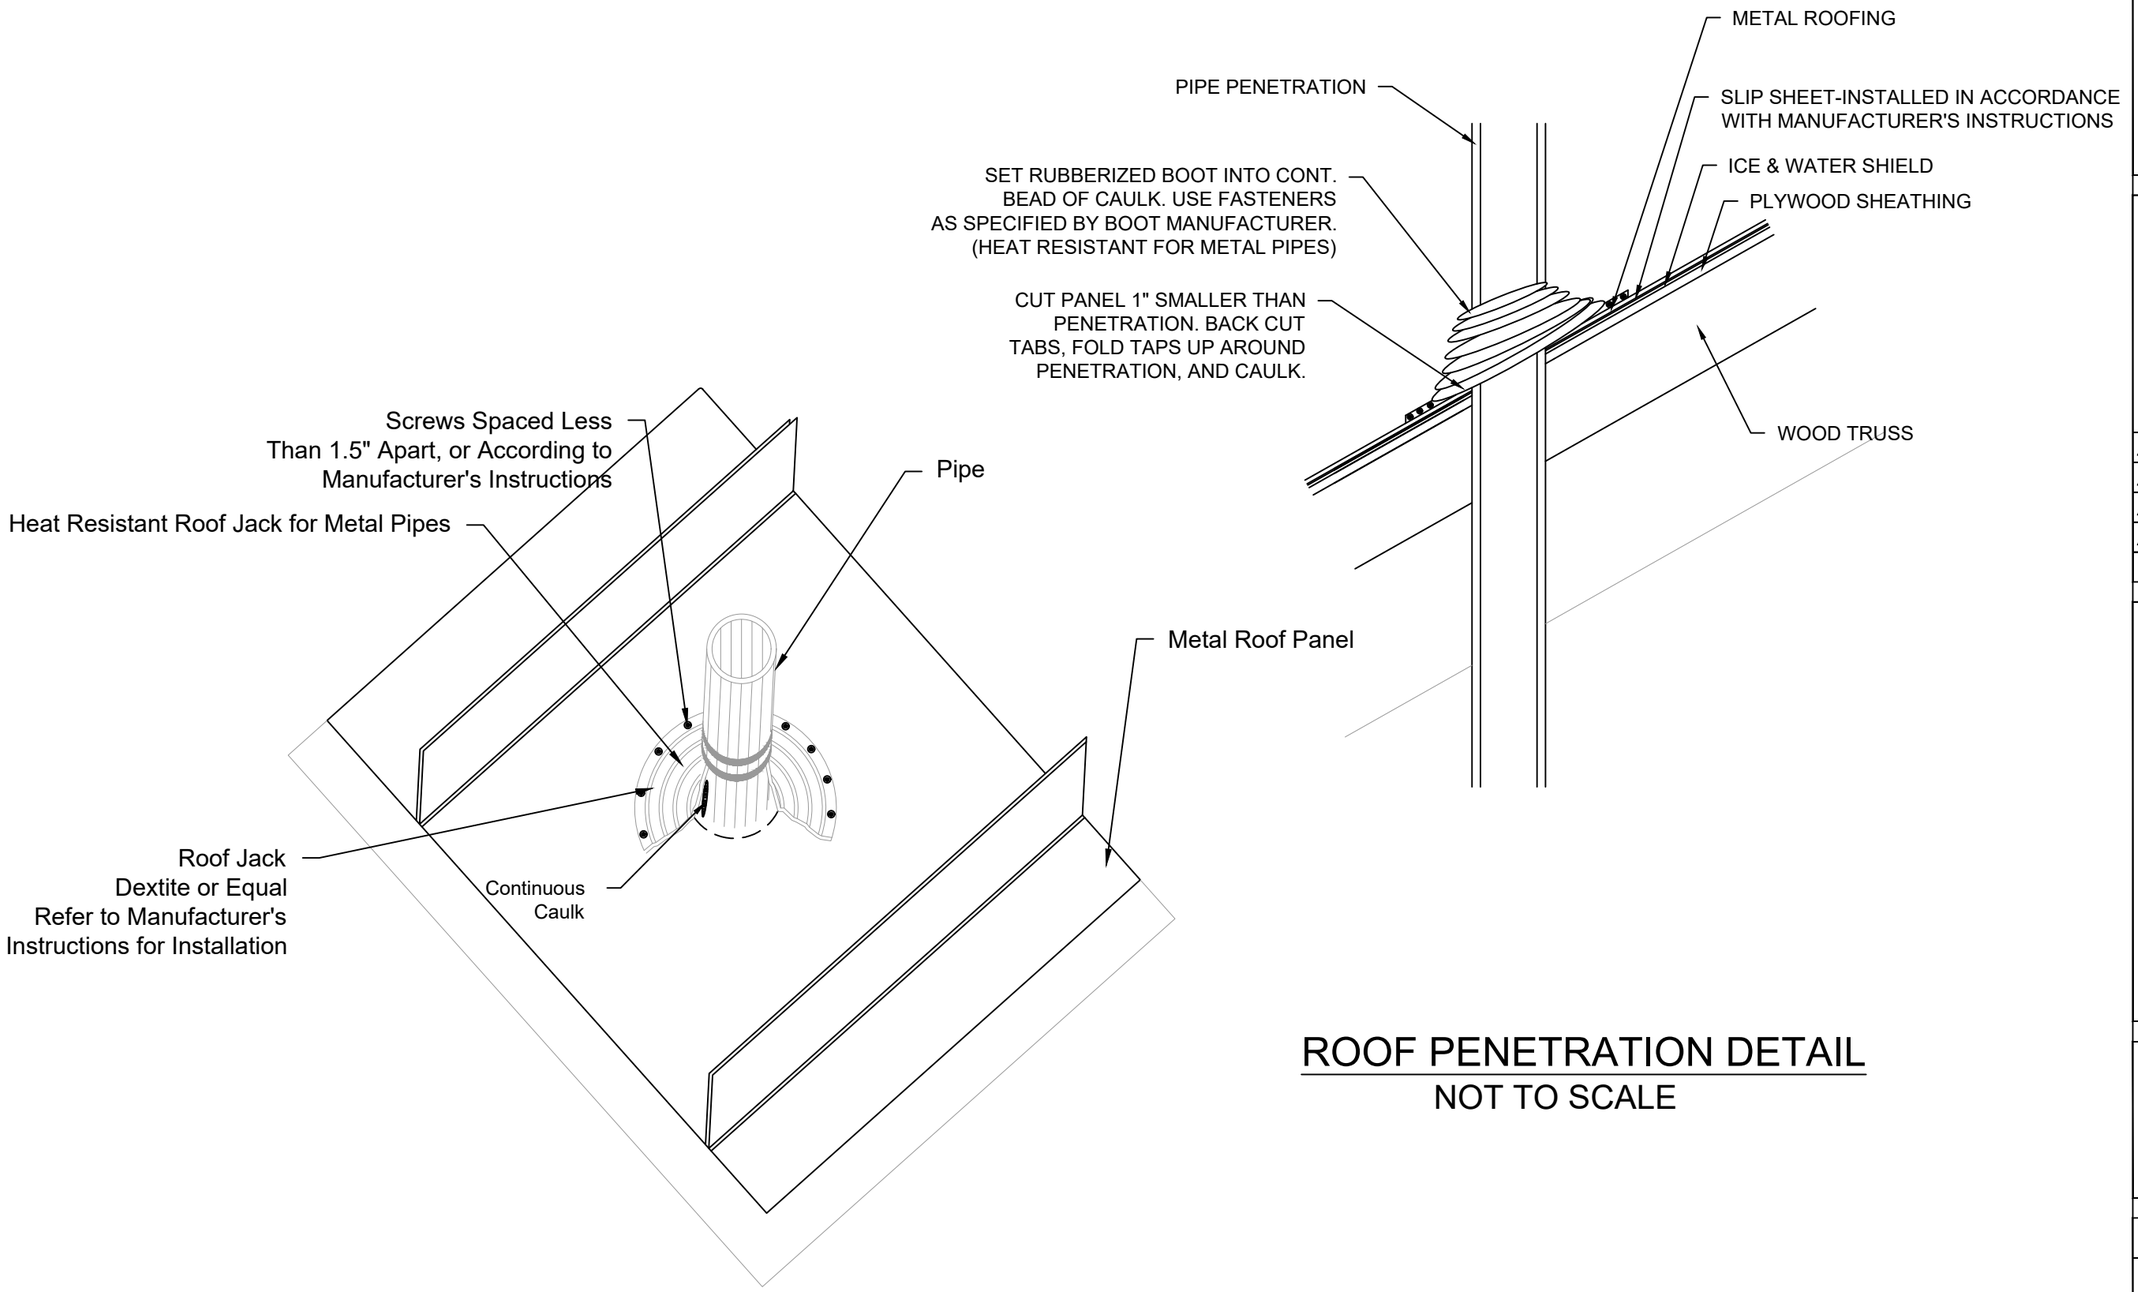

ROOF PENETRATION DETAIL

NOT TO SCALE

United States Department of Agriculture
Forest Service

R4
Intermountain Region

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		12/13/2024
3		12/02/2024
2		09/25/2024
1		04/16/2024

PROJECT NAME

ISLAND PARK ADMIN SITE HOUSING ROOF REPLACEMENTS

Caribou-Targhee National Forest


Ashton/Island Park District

DRAWING TITLE


Roof Penetrations Details

DATE 04/16/2024	ARCHIVE NO.
DESIGNER N. Anderson	DRAWING SHEET NO. C-12
DRAWN N. Anderson	
CHECKED S. Jenkins	
PROJECT NO.	SHEET 14 OF 16

1/29/26 15:10 NINAANDERSON C:\USERS\NINAANDERSON\BOX\01. NINA.ANDERSON WORKSPACE\ENGINEERING DESIGN\IP HOUSING REROOFING\2026 FILES\IP ROOFS.DWG;

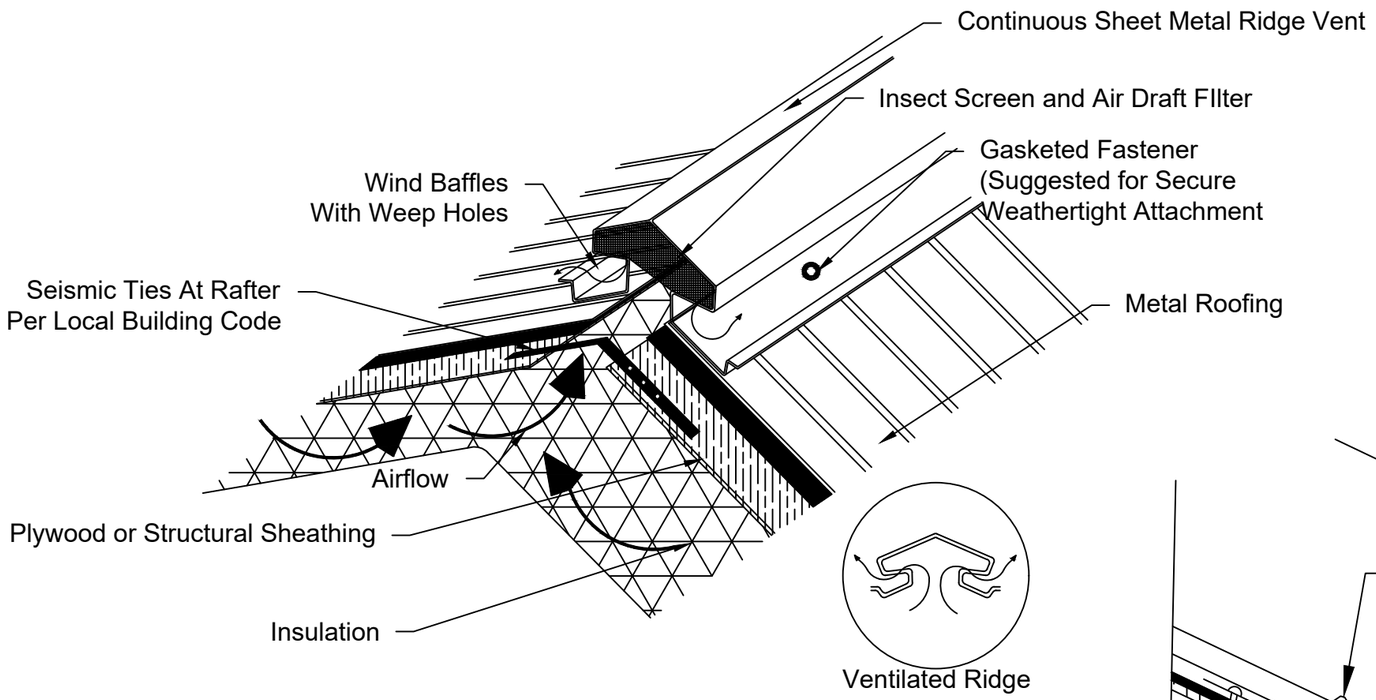

RIDGE VENT DETAILS
NOT TO SCALE

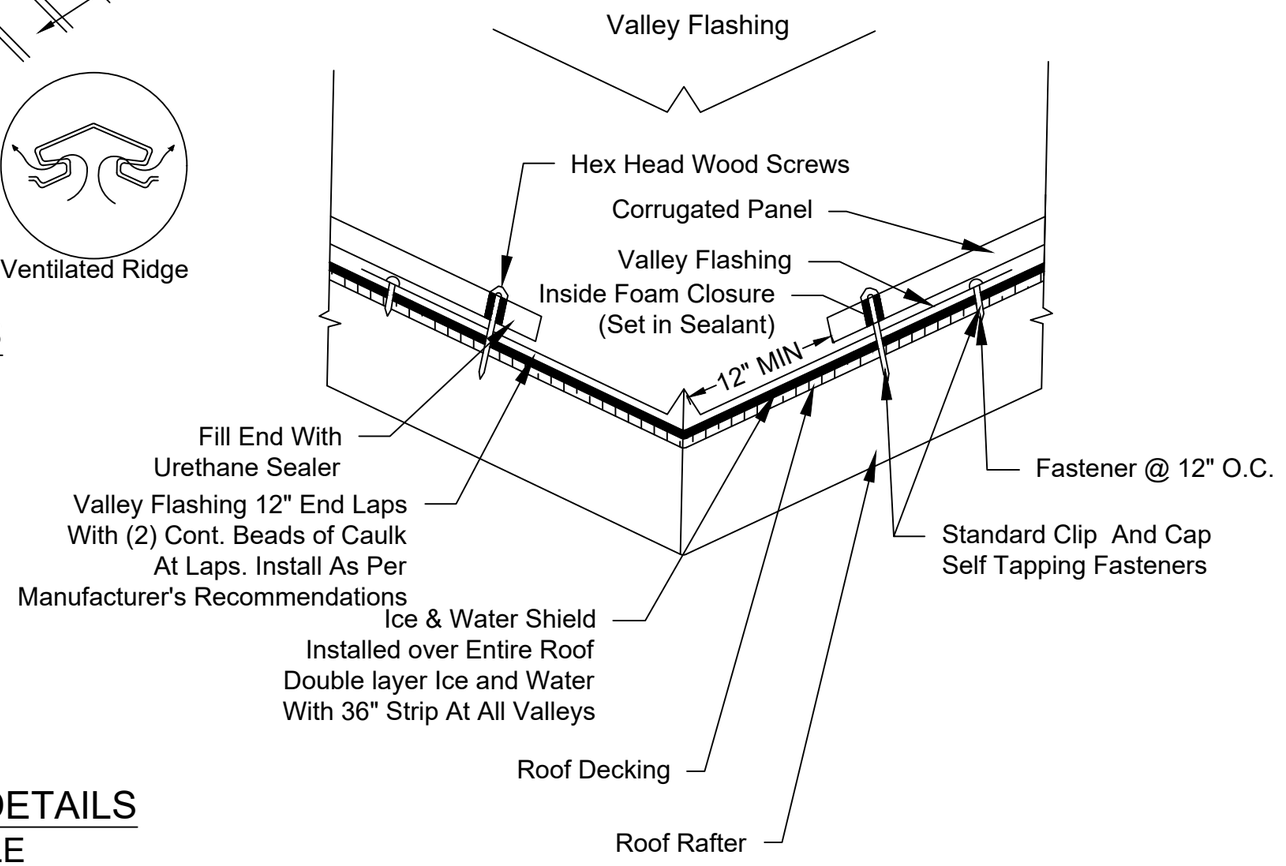

ROOF VALLEY DETAILS
NOT TO SCALE

1/29/26 15:10 NINIANDERSON C:\USERS\NINIANDERSON\BOX\01. NIN.ANDERSON WORKSPACE\ENGINEERING DESIGN\IP HOUSING REROOFING\2026 FILES\IP ROOFS.DWG;

United States Department of Agriculture
Forest Service

R4
Intermountain Region

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		12/13/2024
3		12/02/2024
2		09/25/2024
1		04/16/2024

PROJECT NAME

ISLAND PARK ADMIN SITE HOUSING ROOF REPLACEMENTS

Caribou-Targhee National Forest

Ashton/Island Park District

DRAWING TITLE

Ridge and Valley Details


DATE 04/16/2024	ARCHIVE NO.
DESIGNER N. Anderson	DRAWING SHEET NO. C-13
DRAWN N. Anderson	
CHECKED S. Jenkins	
PROJECT NO.	SHEET 15 OF 16

ALUMINUM FASCIA WITH GABLE END

1. Freeze Runner—Top edge of runner channel must be level and aligned with the bottom surface of the fascia board. Using nailing flange of channel, nail and install along the entire length of the wall surfaces and up to gable peak on side wall.
2. Soffit Panels—gable end—Start installation at the base of the gable end working up to the peak as far as full panels will fit. Slide panels into channel and secure into position using nails in panel grooves as required, to under edge of fascia board. When both sides are done to this point, it may be necessary to cut a panel, bend to match peak angle and rebend edges to make interlocking jointings. Slide peak panel into position and nail.
3. Soffit Panels—other sides— Staring from one end, slide into channel and secure into position using nails in panel grooves as required, to under edge of fascia board. Continue panel installation for entire side.
4. Fascia Trim—Beginning at corners, cut and bend to form box, position up snug to underside of soffit panel, predrill (align with soffit grooves) and nail through bottom lip of fascia trim every 36" along bottom edge of fascia board. NEVER 'face nail' fascia. DO NOT drive nails tight—fascia must be 'hung', only snug to soffit, to allow expansion and help prevent distortion. Allow at least 1" overlap of fascia where lengths meet. Cover balance of gable end with fascia trim and cut to make overlap joint at peak.
5. Finish Trim—Use drip edge to cover and finish top edge of fascia trim. If installing soffit panels over existing wood soffits, soffit 'J' channel can be used in place of freeze runner.
6. Follow all manufacturer's instructions.

SOFFIT & FASCIA DETAIL

NOT TO SCALE

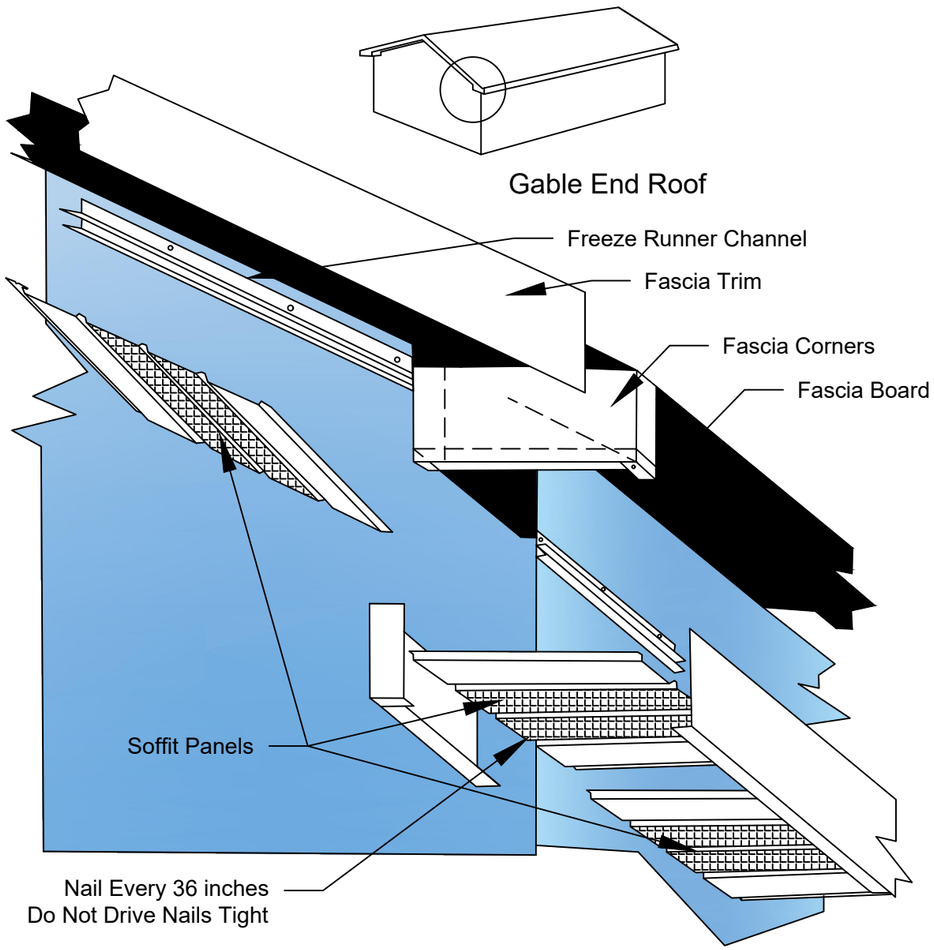

United States Department of Agriculture
Forest Service

R4
Intermountain Region

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		12/13/2024
3		12/02/2024
2		09/25/2024
1		04/16/2024

PROJECT NAME

ISLAND PARK ADMIN SITE HOUSING ROOF REPLACEMENTS

Caribou-Targhee National Forest

Ashton/Island Park District

DRAWING TITLE

Soffit & Fascia Details

DATE 04/16/2024	ARCHIVE NO.
DESIGNER N. Anderson	DRAWING SHEET NO. C-14
DRAWN N. Anderson	
CHECKED S. Jenkins	
PROJECT NO.	SHEET 16 OF 16

1/29/26 15:10 NINIANDERSON C:\USERS\NINIANDERSON\BOX\01. NIN\ANDERSON WORKSPACE\ENGINEERING DESIGN\IP HOUSING REROOFING\2026 FILES\IP ROOFS.DWG;